

WAAS CH 90311 W05A	APP CRS 047°	Rwy Idg 10003 TDZE 952 Apt Elev 952
--	------------------------	--


RNAV (GPS) RWY 5

BATTLE CREEK / W.K. KELLOGG (BTL)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Grand Rapids altimeter setting and increase LPV DA 107 feet, LNAV/VNAV DA 236 feet, and all MDA 120 ASR feet, increase LPV visibility ½ mile all Cats, and LNAV/VNAV visibility ¾ mile all Cats, LNAV Cat C and D visibility ½ mile, Circling Cat C and D visibility ¼ mile. VDP and Baro-VNAV NA when using Grand Rapids altimeter setting.



MISSED APPROACH:
Climb to 2500 direct WIPI and hold.

ATIS 128.325	KALAMAZOO APP CON ★ 119.2 340.9	BATTLE CREEK TOWER ★ 126.825 239.025	GND CON 121.7 256.875	UNICOM 122.95	CTAF 126.825 ⓪
------------------------	---	--	---------------------------------	-------------------------	---------------------------------

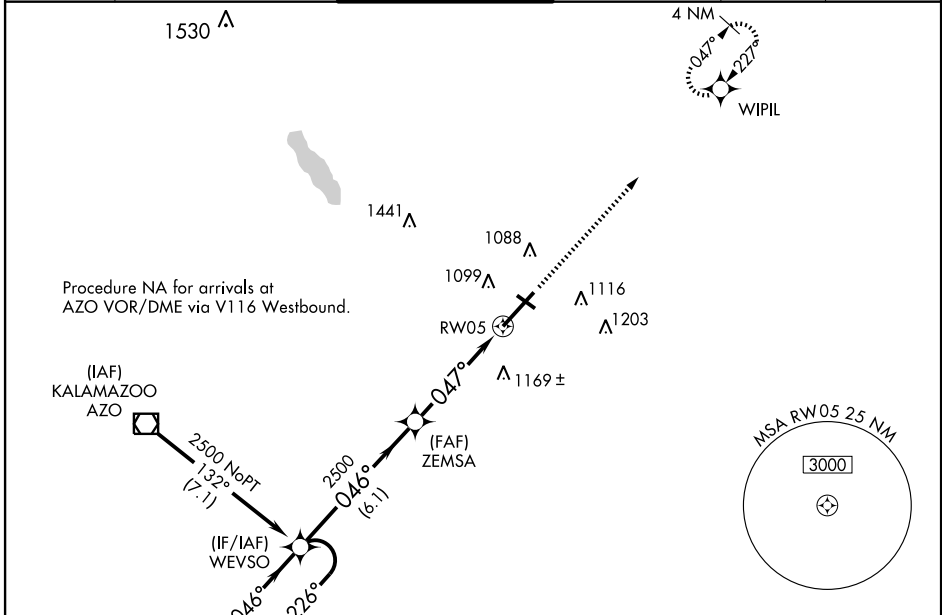

EC-1, 22 OCT 2009 to 19 NOV 2009

EC-1, 22 OCT 2009 to 19 NOV 2009

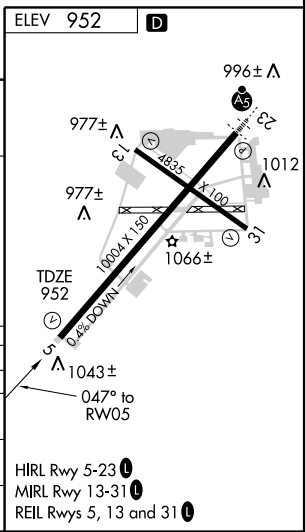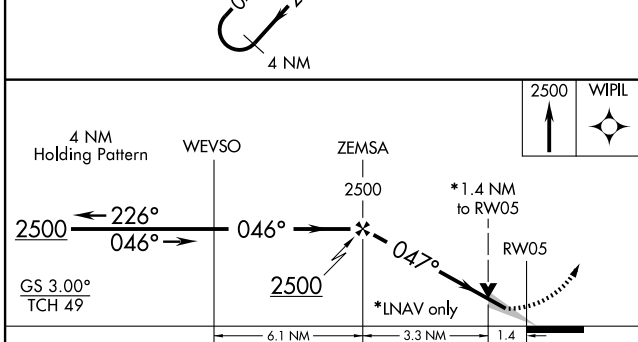

CATEGORY	A	B	C	D
LPV DA	1262-1 310 (400-1)			
LNAV/VNAV DA	1328-1¼ 376 (400-1¼)			
LNAV MDA	1440-1 488 (500-1)	1440-1¼ 488 (500-1¼)	1440-1½ 488 (500-1½)	1440-1½ 488 (500-1½)
CIRCLING	1440-1 488 (500-1)	1500-1 548 (600-1)	1500-1½ 548 (600-1½)	1520-2 568 (600-2)