WAAS	APP CRS	Rwy Idg	6121
CH 81811	316°	TDZE	714
W32A		Apt Elev	728

RNAV (GPS) RWY 32

BUFFALO NIAGARA INTL (BUF)

DME/DME RNP-0.3 NA.
Baro-VNAV NA below -16°C (4°F).
For inoperative MALSR increase LPV all Cats visibility to 1 mile.

MALSR

MISSED APPROACH: Climb to 3000 direct TOMDE and via 239° track to SUSKE and hold.

ATIS	BUFFALO APP CON	BUFFALO TOWER	GND CON	CLNC DEL
135.35	126.15 263.125	120.5 257.8	133.2 257.8	124.7 257.8

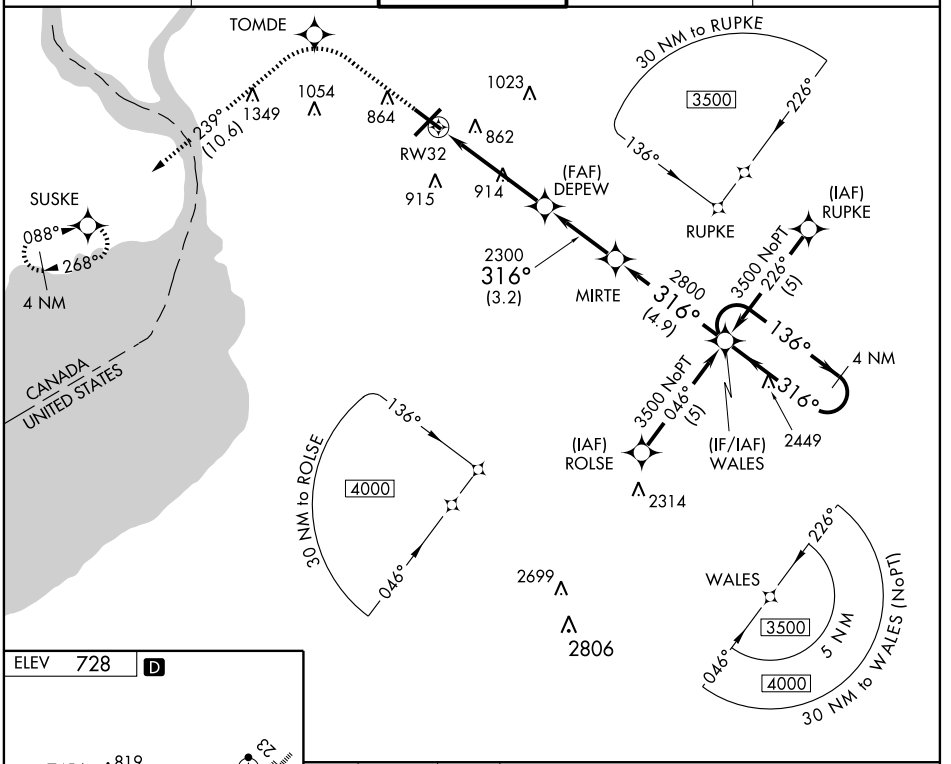

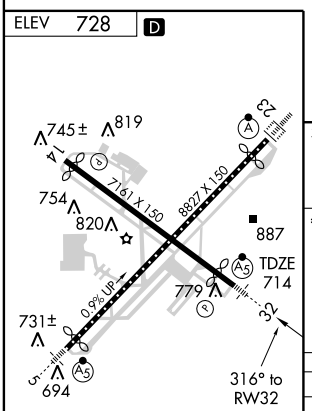

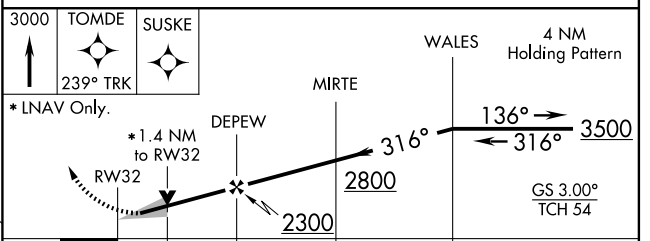

CATEGORY	A	B	C	D
LPV DA	1003-½ 289 (300-½)			
LNAV/ VNAV DA	1146-1 432 (500-1)			
LNAV MDA	1220-½ 506 (500-½)		1220-1 506 (500-1)	
CIRCLING	1220-1½ 492 (500-1½)			1280-2 552 (600-2)

REIL Rwy 14
TDZ/CL Rwy 5 and 23
HIRL Rwy 5-23 and 14-32

NE-2, 22 OCT 2009 to 19 NOV 2009
NE-2, 22 OCT 2009 to 19 NOV 2009