WAAS	APP CRS	Rwy Idg	5928
CH 65614	044°	TDZE	619
W04A		Apt Elev	620

RNAV (GPS) RWY 4R
CHICAGO MIDWAY INTL (MDW)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2600 direct ZEKMO and via 122° track to NILES and hold.

ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL
132.75	118.4 388.0	118.7 226.3	121.65	121.85

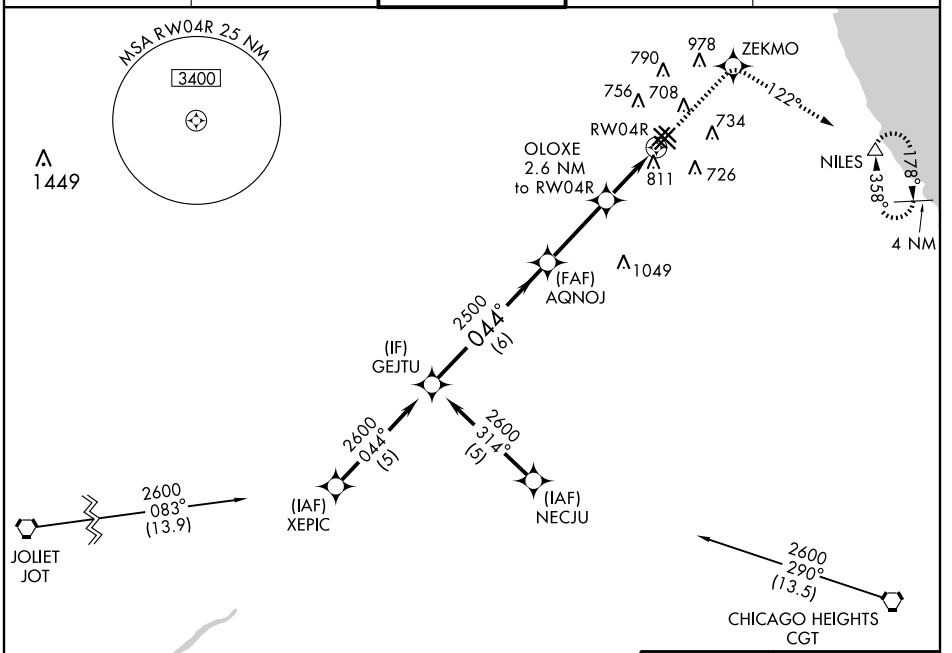

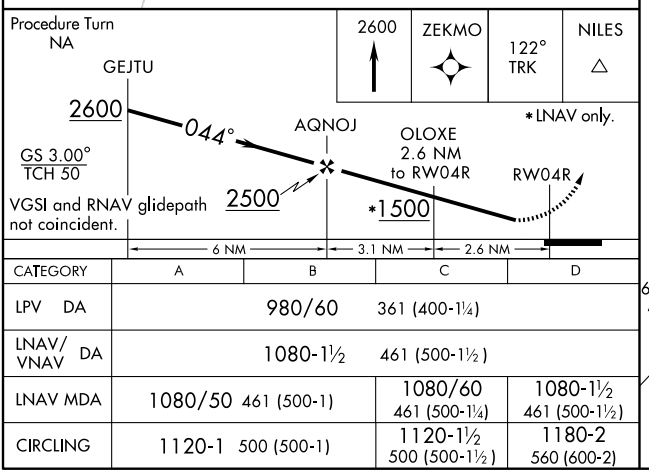

CATEGORY	A	B	C	D
LPV DA	980/60	361 (400-1¼)		
LNAV/VNAV DA	1080-1½	461 (500-1½)		
LNAV MDA	1080/50 461 (500-1)		1080/60 461 (500-1¼)	1080-1½ 461 (500-1½)
CIRCLING	1120-1 500 (500-1)		1120-1½ 500 (500-1½)	1180-2 560 (600-2)

ELEV 620 D

HIRL Rwys 13C-31C and 4R-22L
MIRL Rwys 4L-22R, 13L-31R, and 13R-31L
REIL Rwys 4R, 22L, and 31C
LDIN Rwys 13C and 31C

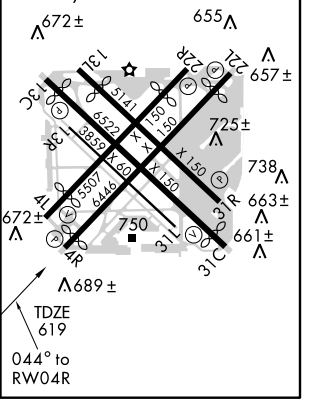

EC-3, 22 OCT 2009 to 19 NOV 2009
EC-3, 22 OCT 2009 to 19 NOV 2009