APP CRS	Rwy Idg	6059
135°	TDZE	611
	Apt Elev	620

RNAV (RNP) Y RWY 13C

CHICAGO MIDWAY INTL (MDW)

RF, GPS, and RADAR REQUIRED. For uncompensated Baro-VNAV systems, procedure NA below -15° C (5° F) or above 47° C (116° F). When VGSI inop, procedure NA at night.

MISSED APPROACH: Climb to 2600 via 135° track to FATLA and 195° track to EON VORTAC and hold.

ATIS	CHICAGO APP CON	MIDWAY TOWER	GND CON	CLNC DEL
132.75	118.4 388.0	118.7 226.3	121.65	121.85

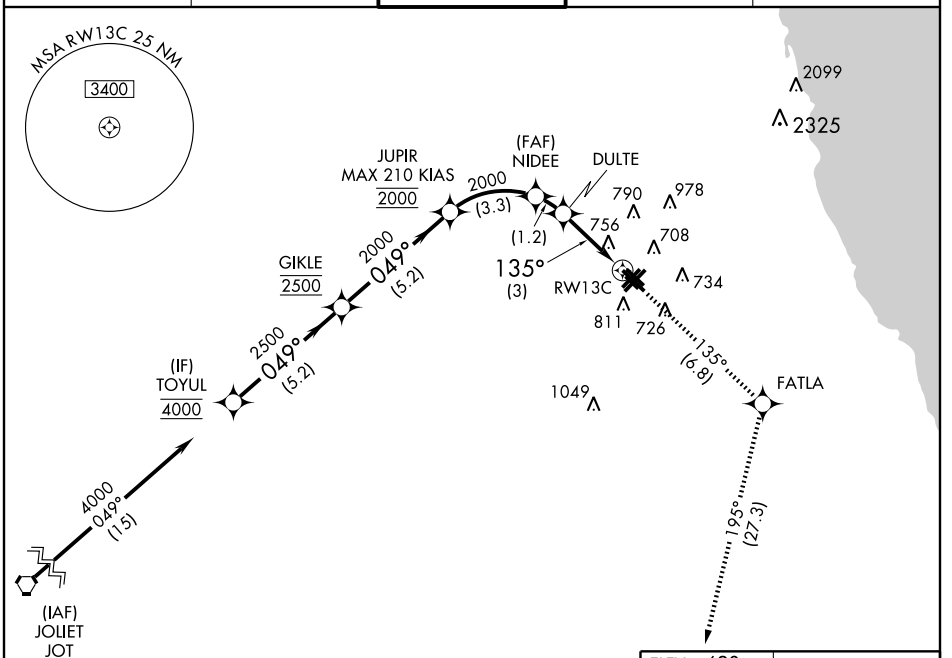

Procedure NA for arrivals at JOT VORTAC via V8 Westbound.



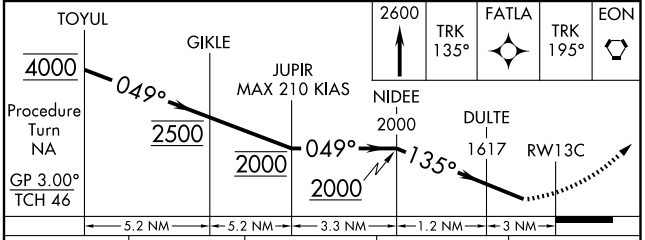

CATEGORY	A	B	C	D
RNP 0.30 DA	1065-1½	454 (500-1½)		

SPECIAL AIRCRAFT & AIRCREW AUTHORIZATION REQUIRED

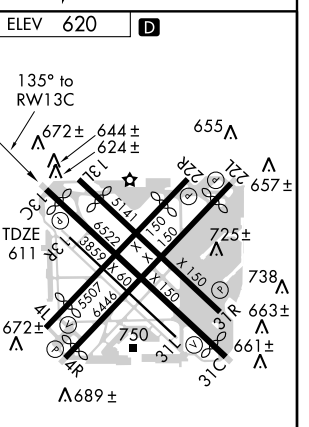

HIRL Rwys 13C-31C and 4R-22L
MIRL Rwys 4L-22R, 13L-31R, and 13R-31L
REIL Rwys 4R, 22L, and 31C
LDIN Rwys 13C and 31C

EC-3, 22 OCT 2009 to 19 NOV 2009
EC-3, 22 OCT 2009 to 19 NOV 2009