WAAS	APP CRS	Rwy Idg 13501
CH 53602	348°	TDZE 6118
W35A		Apt Elev 6187

RNAV (GPS) RWY 35R

COLORADO SPRINGS/CITY OF COLORADO SPRINGS MUNI (COS)

Baro-VNAV NA when using Centennial altimeter setting. If local altimeter setting not received, use Centennial altimeter setting and increase all DAs/MDAs 160 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 37°C (98°F).
DME/DME RNP -0.3 NA. VDP NA when using Centennial altimeter setting.

MISSED APPROACH: Climb to 10000 direct WABOP and via 066° track to ADANE and hold, continue climb-in-hold to 10000.

ATIS	SPRINGS APP CON	SPRINGS TOWER	GND CON	CLNC DEL
125.0 254.3	118.5 239.025	133.15 335.55 (EAST) 119.9 360.6 (WEST)	121.7 348.6	134.45 363.125

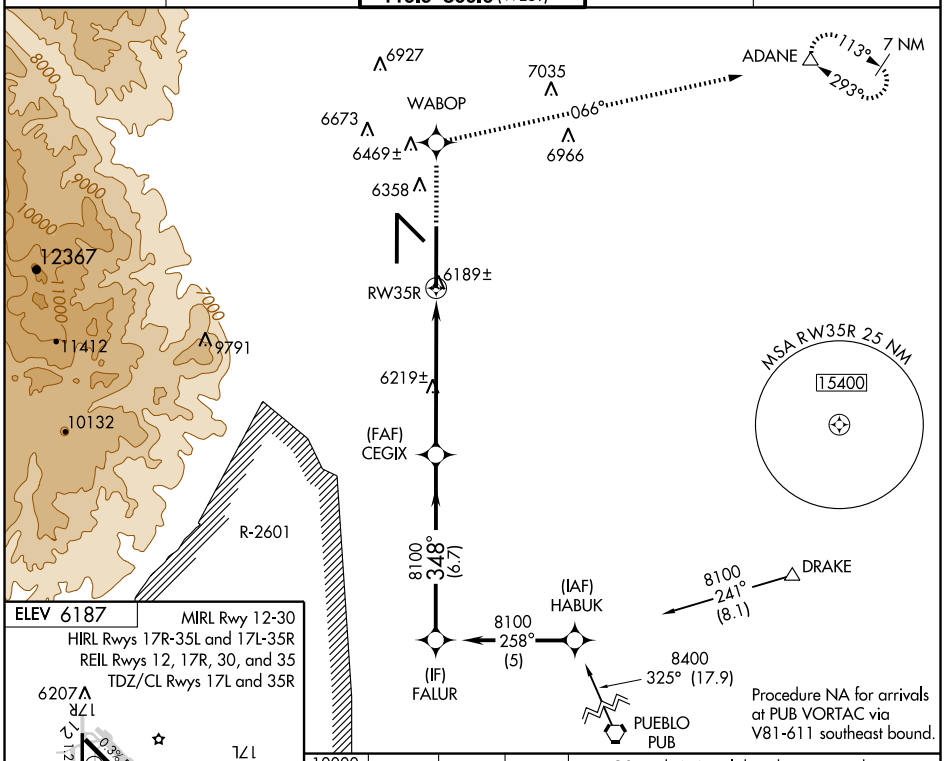

ELEV 6187

MIRL Rwy 12-30
HIRL Rwys 17R-35L and 17L-35R
REIL Rwys 12, 17R, 30, and 35
TDZ/CL Rwys 17L and 35R

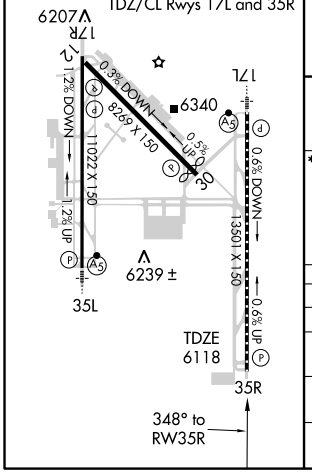

10000	WABOP	066° track	ADANE

VGSI and RNAV glidepath not coincident.

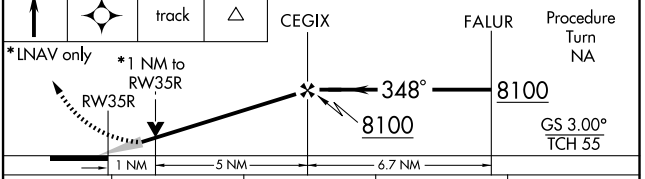

CATEGORY	A	B	C	D
LPV DA	6368-1 250 (200-1)			
LNAV/VNAV DA	6459-1¼ 341 (300-1¼)			
LNAV MDA	6480-1 362 (300-1)			6480-1¼ 362 (300-1¼)
CIRCLING	6740-1 553 (600-1)	6760-1 573 (600-1)	6760-1½ 573 (600-1½)	6840-2 653 (700-2)

SW-1, 22 OCT 2009 to 19 NOV 2009
SW-1, 22 OCT 2009 to 19 NOV 2009