VORTAC CTY	APP CRS	Rwy Idg	5001
112.0	304°	TDZE	42
Chan 57		Apt Elev	42

VOR RWY 31
CROSS CITY (CTY)

Visibility reduction by helicopters NA.
NA
Use Williston altimeter setting, when not received use Gainesville altimeter setting and increase all MDAs 40 feet, increase Circling Cat C visibility ¼.

MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 direct CTY VORTAC and hold.

WILLISTON AWOS-3	JACKSONVILLE CENTER	UNICOM
118.425	127.8 352.0	122.8 (CTAF) L

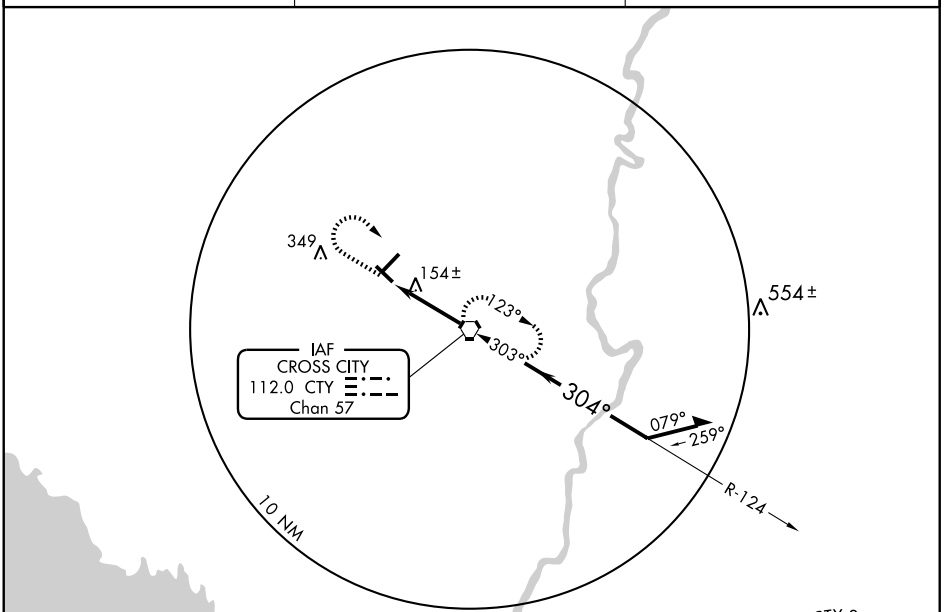

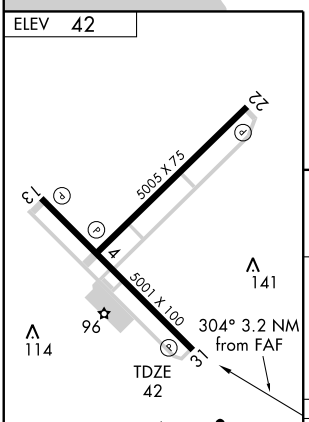

MIRL Rwys 4-22 and 13-31 L
REIL Rwys 13 and 31 L

FAF to MAP 3.2 NM					
Knots	60	90	120	150	180
Min:Sec	3:12	2:08	1:36	1:17	1:04

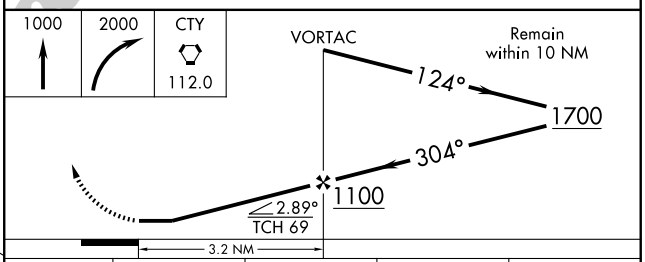

CATEGORY	A	B	C	D
S-31	500-1	458 (500-1)	500-1¼ 458 (500-1¼)	500-1½ 458 (500-1½)
CIRCLING	560-1	518 (600-1)	620-1½ 578 (600-1½)	740-2¼ 698 (700-2¼)

SE-3, 22 OCT 2009 to 19 NOV 2009
SE-3, 22 OCT 2009 to 19 NOV 2009