RNAV (GPS) RWY 5

DES MOINES INTL (DSM)

WAAS	APP CRS	Rwy Idg	9003
CH 69202	051°	TDZE	931
W05A		Apt Elev	958

T A DME/DME RNP-0.3 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (116°F).
If local altimeter setting not received, use Ankeny Rgnl altimeter setting and increase all DAs/MDAs 40 feet.
Baro-VNAV and VDP NA when using Ankeny Rgnl altimeter setting.
For inoperative MALSR, increase LPV all Cats. visibility to RVR 5000 and LNAV/VNAV all Cats. visibility to RVR 6000 and LNAV Cat. D visibility to RVR 6000.

MALSR (A5)

MISSED APPROACH: Climb to 3100 direct IOWAA and hold.

ATIS	DES MOINES APP CON	DES MOINES TOWER	GND CON	CLNC DEL
119.55 251.05	135.2 360.7	118.3 257.8	121.9 348.6	134.15 317.55

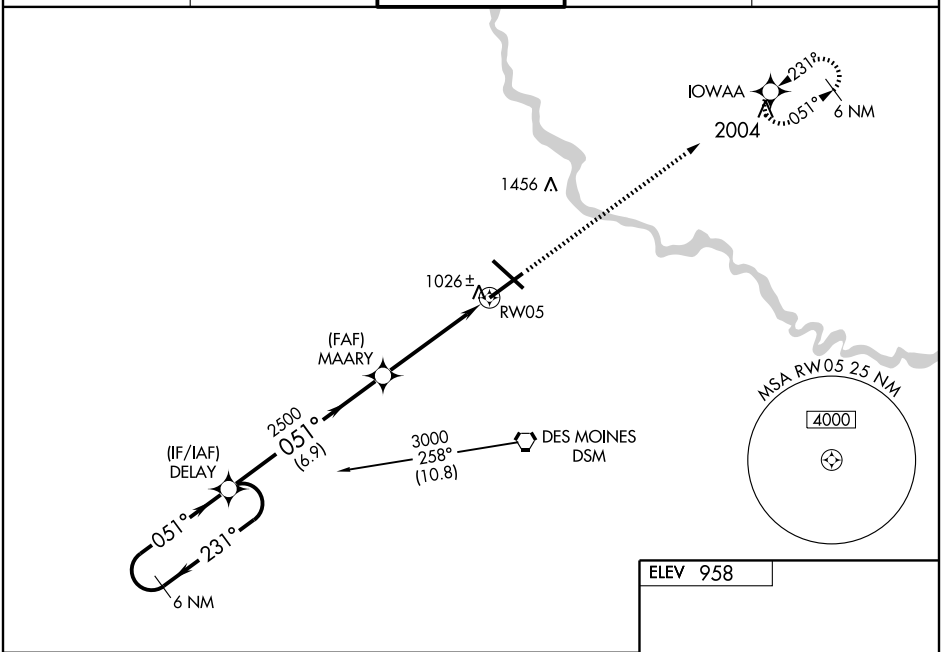

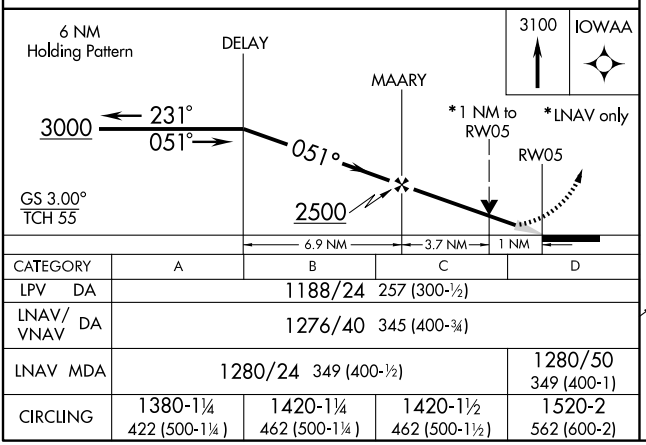

CATEGORY	A	B	C	D
LPV DA	1188/24 257 (300-½)			
LNAV/VNAV DA	1276/40 345 (400-¾)			
LNAV MDA	1280/24 349 (400-½)			1280/50 349 (400-1)
CIRCLING	1380-1¼ 422 (500-1¼)	1420-1¼ 462 (500-1¼)	1420-1½ 462 (500-1½)	1520-2 562 (600-2)

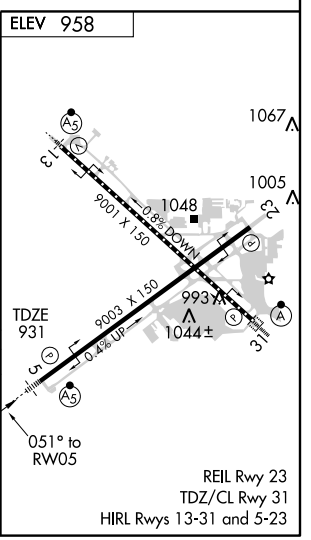

NC-3, 22 OCT 2009 to 19 NOV 2009
NC-3, 22 OCT 2009 to 19 NOV 2009