


LOC I-EIU 108.3	APP CRS 355°	Rwy Idg TDZE 6249 1152 Apt Elev 1167
---------------------------	------------------------	--

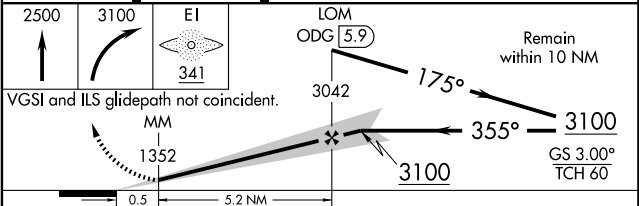

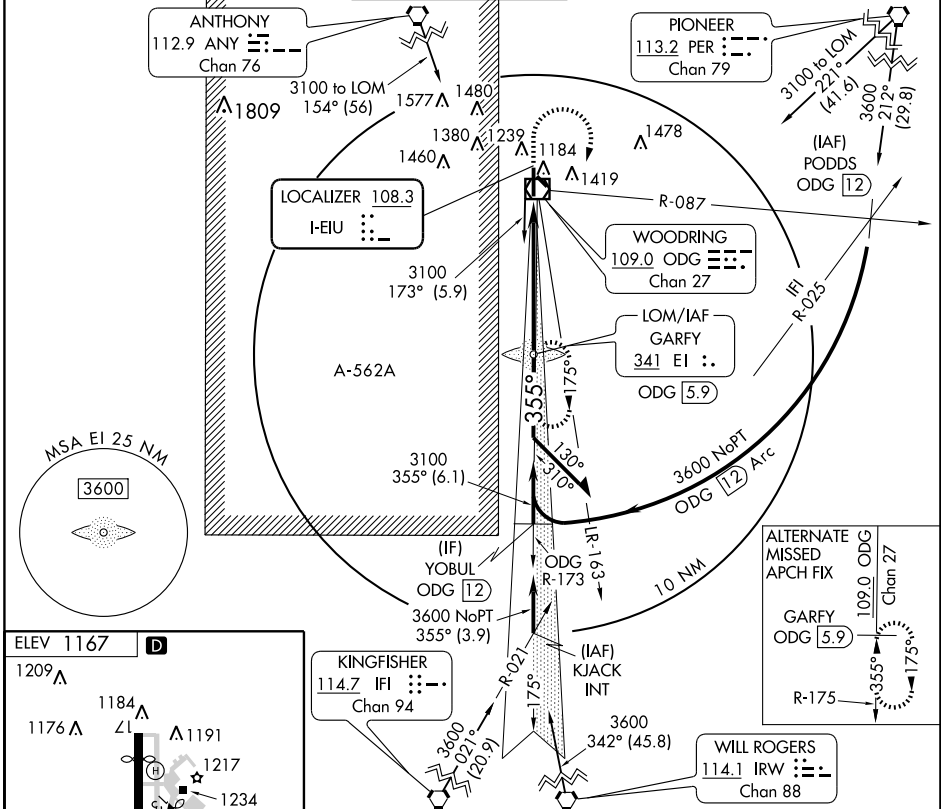
ILS or LOC RWY 35

ENID WOODRING RGNL (WDG)

⚠ ADF required. When local altimeter setting not received, use Guthrie altimeter setting and increase all DA/MDA 100 feet, S-LOC Cat C/D visibility and Circling Cat C visibility ¼ mile. For inoperative MALSR, when using Guthrie altimeter setting, increase S-ILS 35 all Cats visibility to 1 mile, S-LOC 35 Cat C visibility to 1¼ and S-LOC Cat D visibility to 1½.

MALSR

MISSED APPROACH:
 Climb to 2500 then climbing right turn to 3100 direct GARFY LOM and hold.

AWOS-3 120.625	VANCE APP CON * 119.775 378.8	WOODRING TOWER * 118.9 257.95	GND CON 121.925	UNICOM 122.95
--------------------------	---	---	---------------------------	-------------------------



CATEGORY	A	B	C	D
S-ILS 35	1352-½ 200 (200-½)			
S-LOC 35	1520-½ 368 (400-½)			1520-¾ 368 (400-¾)
CIRCLING	1720-1 553 (600-1)		1720-1½ 553 (600-1½) 1720-2 553 (600-2)	

SC-1, 22 OCT 2009 to 19 NOV 2009

SC-1, 22 OCT 2009 to 19 NOV 2009