

# RNAV (GPS) RWY 1




FLORENCE RGNL (F'L O)

APP CRS	Rwy Idg	<b>6000</b>
<b>006°</b>	TDZE	<b>134</b>
	Apt Elev	<b>146</b>

**ASR** DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Darlington altimeter setting and increase all MDA 60 feet and LNAV Cat. C visibility 1/4 mile.

MISSED APPROACH: Climb to 2000 direct TNPIN and hold.

ATIS	FLORENCE APP CON*	FLORENCE TOWER*	GND CON	CLNC DEL	UNICOM
<b>123.625</b>	<b>118.6 341.7</b> (256°-074°) <b>135.25 316.15</b> (075°-255°)	<b>125.1 (CTAF) 353.85</b>	<b>121.9 353.85</b>	<b>121.9 353.85</b>	<b>122.95</b>

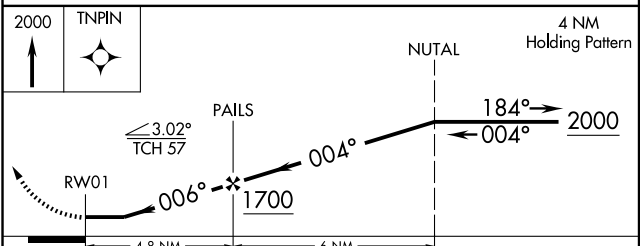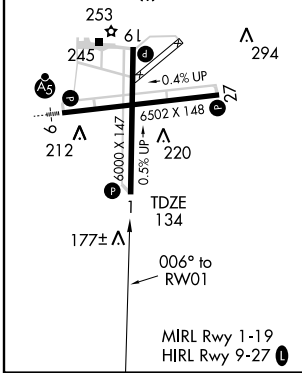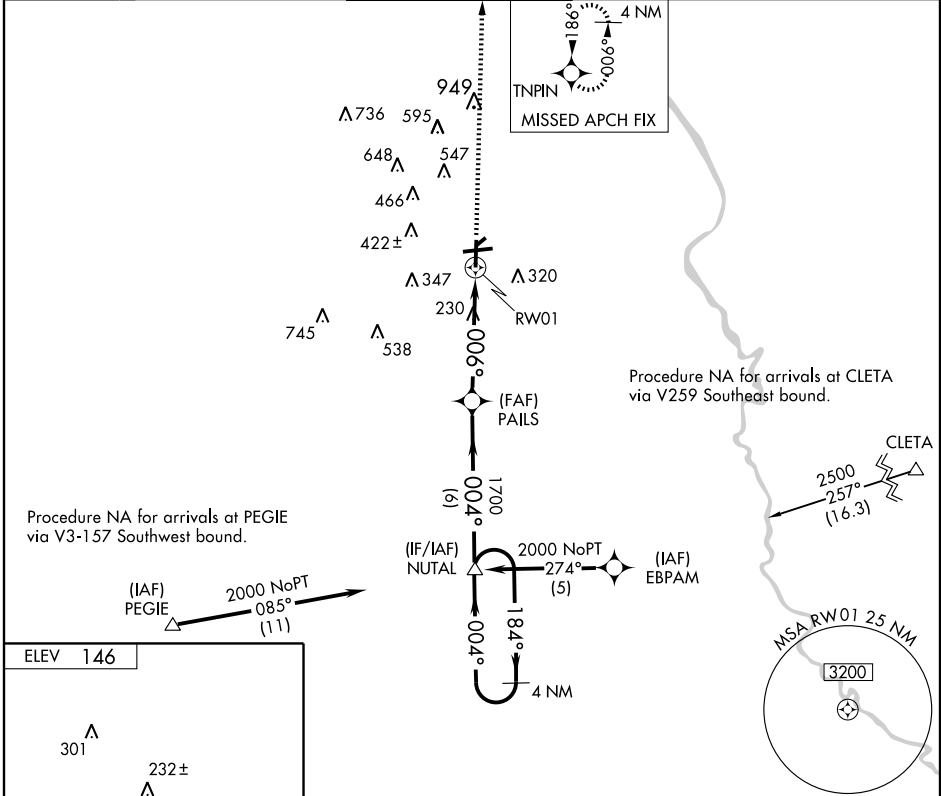

CATEGORY	A	B	C	D
LNAV MDA	480-1 346 (400-1)			480-1 1/4 346 (400-1 1/4)
CIRCLING	640-1	494 (500-1)	640-1 1/2 494 (500-1 1/2)	740-2 594 (600-2)

SE-2, 22 OCT 2009 to 19 NOV 2009

SE-2, 22 OCT 2009 to 19 NOV 2009