WAAS CH 69599 W23A	APP CRS 227°	Rwy Idg 11981 TDZE 799 Apt Elev 815

RNAV (GPS) RWY 23
FORT WAYNE INTL (FWA)

When local altimeter setting not received, use Auburn altimeter setting and increase LPV DA to 1110, increase LNAV/VNAV DA to 1287, increase all MDA 60 feet and increase LPV visibility ¼ mile, LNAV/VNAV visibility ¼ mile, LNAV Cat D/E visibility ¼ mile, and circling Cat E visibility ¼ mile. ASR VDP and Baro-VNAV NA when using Auburn altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3000 direct EBACO and hold.

ATIS	FORT WAYNE APP CON	FORT WAYNE TOWER	GND CON	CLNC DEL
121.25 349.0	127.2 284.6	119.1 272.725	121.9 348.6	124.75

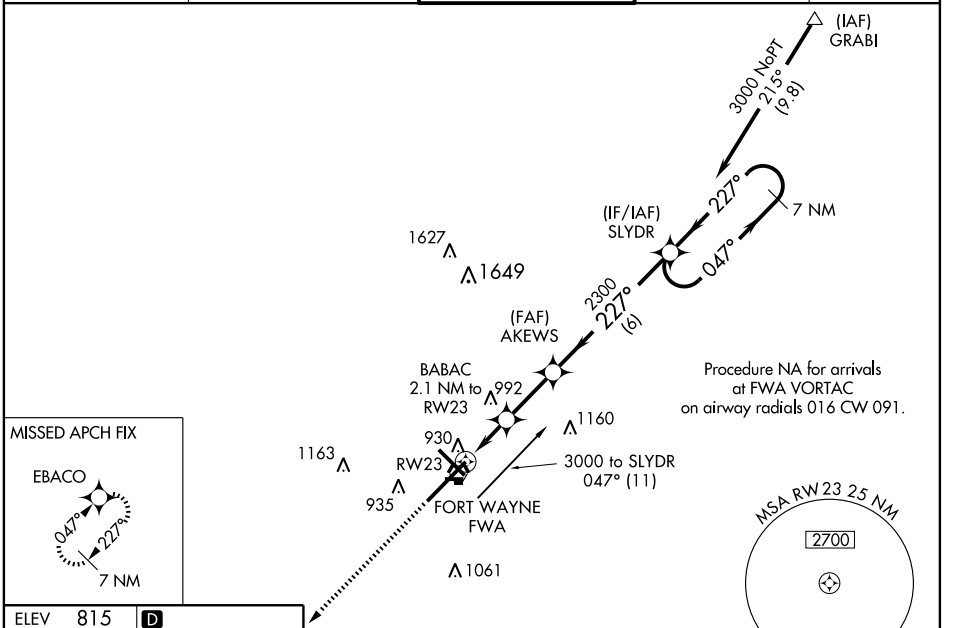

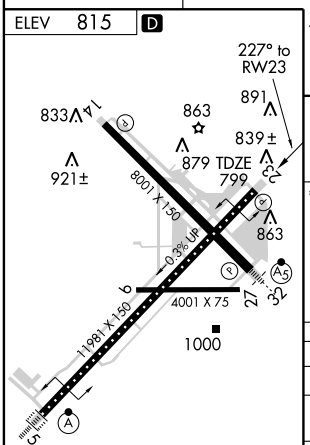

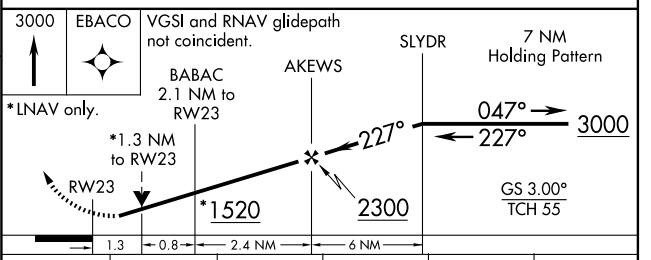

CATEGORY	A	B	C	D	E
LPV DA	1053/40 254 (300-¾)				
LNAV/VNAV DA	1230-1½ 431 (500-1½)				
LNAV MDA	1300/50 501 (500-1)		1300-1½ 501 (500-1½)		1300-1¾ 501 (500-1¾)
CIRCLING	1300-1 485 (500-1)		1300-1½ 485 (500-1½)	1380-2 565 (600-2)	1520-2½ 705 (800-2½)

EC-2, 22 OCT 2009 to 19 NOV 2009
EC-2, 22 OCT 2009 to 19 NOV 2009