

| | | | |
|--|------------------------|-----------------------------|--|
| WAAS CH 99399 W07A | APP CRS 072° | Rwy Idg TDZE Apt Elev | 10599 683 684 |
|--|------------------------|-----------------------------|--|

RNAV (GPS) RWY 7




TOLEDO EXPRESS (TOL)

ASR Baro-VNAV NA Below -16°C (4°F). DME/DME RNP-0.3 NA. If local altimeter setting not received, use Lambertville/Toledo Suburban altimeter setting and increase all DA's/MDA's 40 feet. VDP and Baro VNAV NA when using Lambertville/Toledo Suburban altimeter setting. For inoperative ALSF, increase LNAV Cat. D/E visibility to RVR 6000, increase LPV visibility to RVR 6000 all Cats.


ALSF-2

MISSED APPROACH: Climb to 3000 direct AKEPE and hold.

| | | | | |
|-----------------------------|--|------------------------------------|-------------------------------|---------------------------------|
| ATIS 118.75 271.3 | TOLEDO APP CON 134.35 317.55 | TOLEDO TOWER 118.1 285.4 | GND CON 121.9 348.6 | CLNC DEL 121.75 348.6 |
|-----------------------------|--|------------------------------------|-------------------------------|---------------------------------|

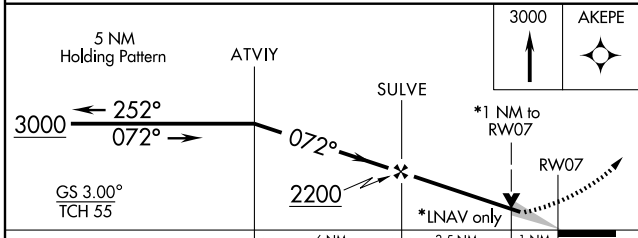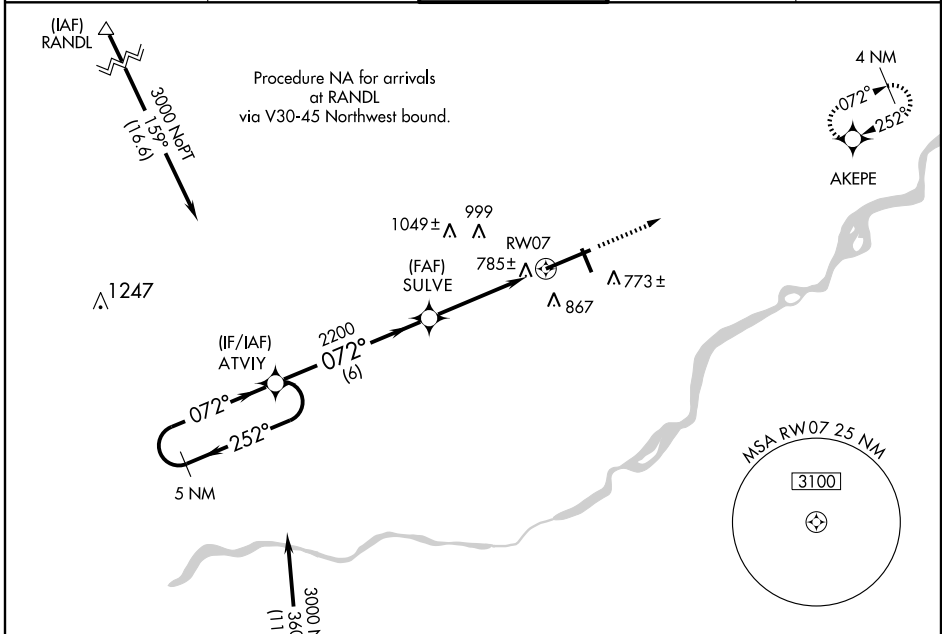

| CATEGORY | A | B | C | D | E |
|--------------|---------------------|--------------|---|-------------|--------------|
| LPV DA | 1018/40 335 (400-¾) | | | | |
| LNAV/VNAV DA | 1086/50 403 (500-1) | | | | |
| LNAV MDA | 1040/24 | 357 (400-½) | | 1040/50 | 357 (400-1) |
| CIRCLING | 1180-1½ | 496 (500-1½) | | 1240-2 | 1400-2½ |
| | | | | 556 (600-2) | 716 (800-2½) |

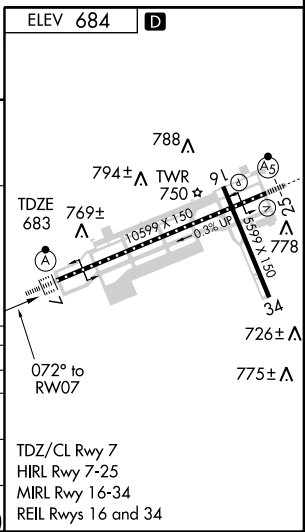

EC-2, 22 OCT 2009 to 19 NOV 2009

EC-2, 22 OCT 2009 to 19 NOV 2009