LOC/DME I-HON	APP CRS	Rwy Idg	7201
110.3	121°	TDZE	1289
Chan 40		Apt Elev	1289

ILS or LOC RWY 12

HURON RGNL (HON)

For inoperative MALSR when using Mitchell altimeter setting increase S-ILS 12 all cats visibility to 1 mile. When local altimeter setting not received, use Mitchell Muni altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase S-LOC 12 Cats C and D visibility ¼ mile and Circling Cats C and D ¼ mile. VDP NA when using Mitchell altimeter setting.

MALSR

MISSED APPROACH: Climb to 3000 then left turn direct HON VORTAC and hold.

ASOS	MINNEAPOLIS CENTER	HURON RADIO	UNICOM
118.125	126.25 339.8	123.6 (CTAF)	123.0 L

ADF or DME REQUIRED

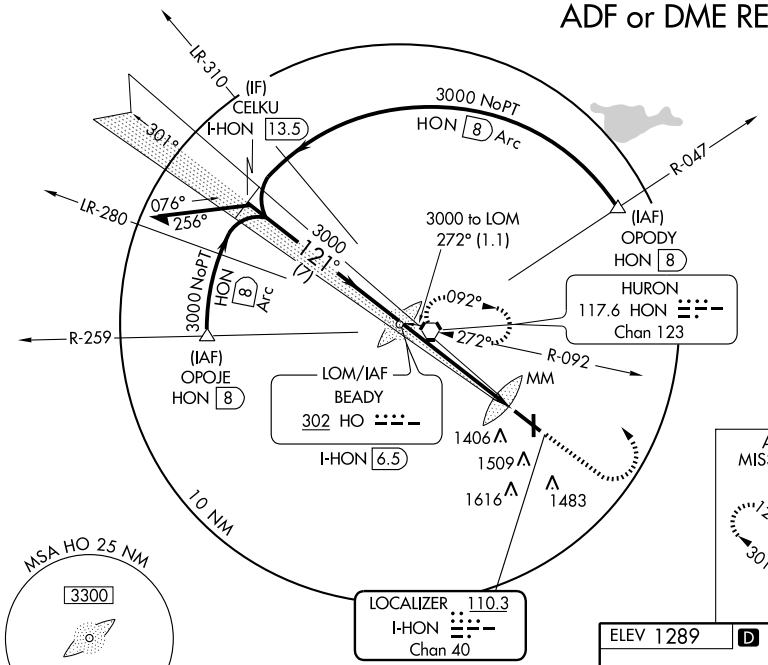

ALTERNATE MISSED APCH FIX



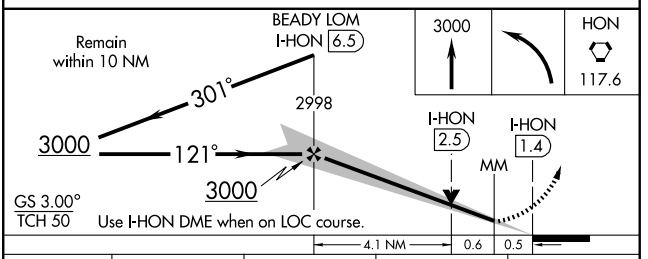

CATEGORY	A	B	C	D
S-ILS 12	1489-½ 200 (200-½)			
S-LOC 12	1680-½ 391 (400-½)			1680-¾ 391 (400-¾)
CIRCLING	1820-1 531 (600-1)		1820-1½ 531 (600-1½)	1980-2¼ 691 (700-2¼)

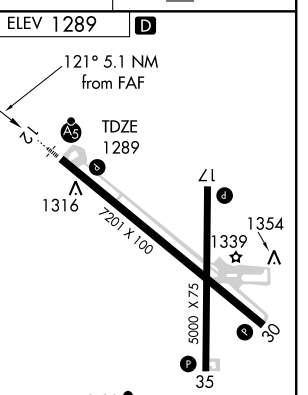

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NC-1, 22 OCT 2009 to 19 NOV 2009
NC-1, 22 OCT 2009 to 19 NOV 2009