APP CRS	Rwy Idg	7280
137°	TDZE	796
	Apt Elev	797

RNAV (RNP) Z RWY 14

INDIANAPOLIS INTL (IND)

GPS Required. For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F). For inoperative MALSR, increase RNP 0.22 visibility to RVR 5000 and RNP 0.30 visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 2700 via 137° track to TEKNE and hold.

ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL
134.25	119.3 317.8	(5R/23L, 14/32) 120.9 257.8 (5L/23R) 127.82 257.8	121.9 257.8	128.75 257.8

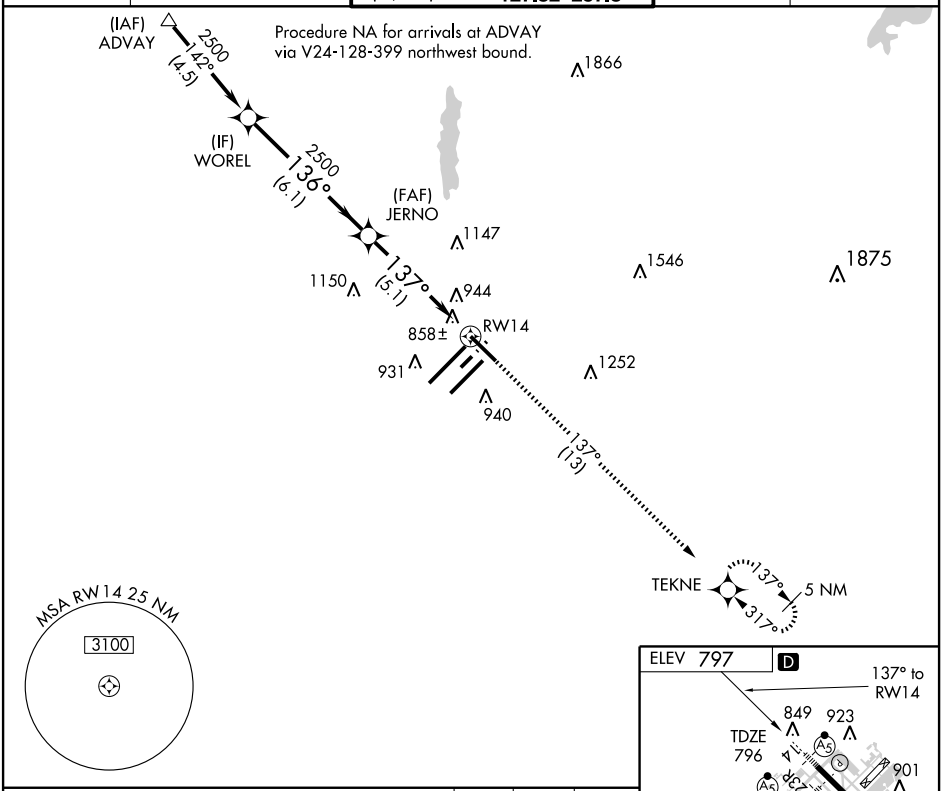

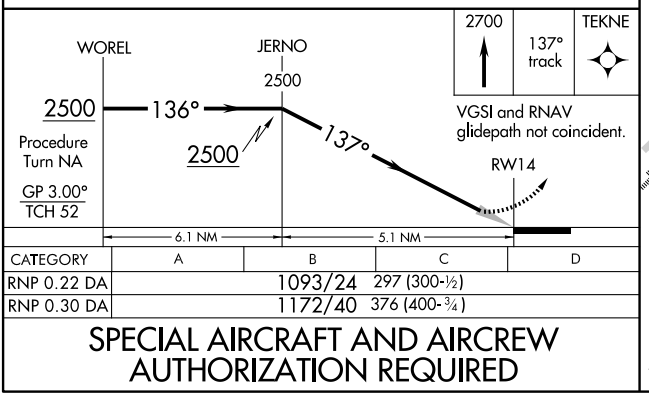

CATEGORY	A	B	C	D
RNP 0.22 DA	1093/24 297 (300-½)			
RNP 0.30 DA	1172/40 376 (400-¾)			

SPECIAL AIRCRAFT AND AIRCREW AUTHORIZATION REQUIRED

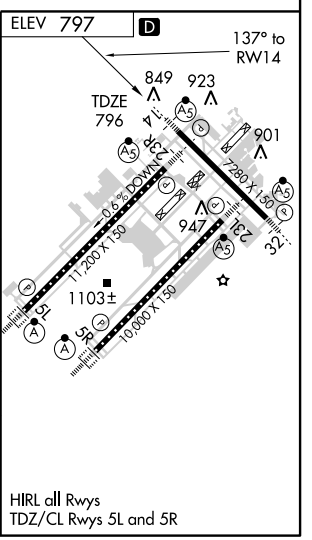

EC-2, 22 OCT 2009 to 19 NOV 2009
EC-2, 22 OCT 2009 to 19 NOV 2009