

VORTAC CRG 114.5 Chan 92	APP CRS 330°	Rwy Idg TDZE 41 Apt Elev 41	4008
--	------------------------	---	-------------


VOR/DME RWY 32

JACKSONVILLE/CRAIG MUNI (CRG)

▲ When local altimeter setting not received, use Jacksonville Intl altimeter setting and increase all MDA 40 feet.
▲ For inoperative MALSR, increase S-32 Cat. D visibility to 1¼ miles.
ASR VDP NA when using Jacksonville Intl altimeter setting.



MALSR MISSED APPROACH: Climb to 800 then climbing right turn to 1600 via heading 200° and CRG VORTAC R-150 to BEABE/CRG 5 DME and hold.

ATIS 125.4	JACKSONVILLE APP CON 124.9 308.4	CRAIG TOWER ★ 132.1(CTAF) 0 257.625	GND CON 121.8	CLNC DEL 118.35	UNICOM 122.95
----------------------	--	---	-------------------------	---------------------------	-------------------------

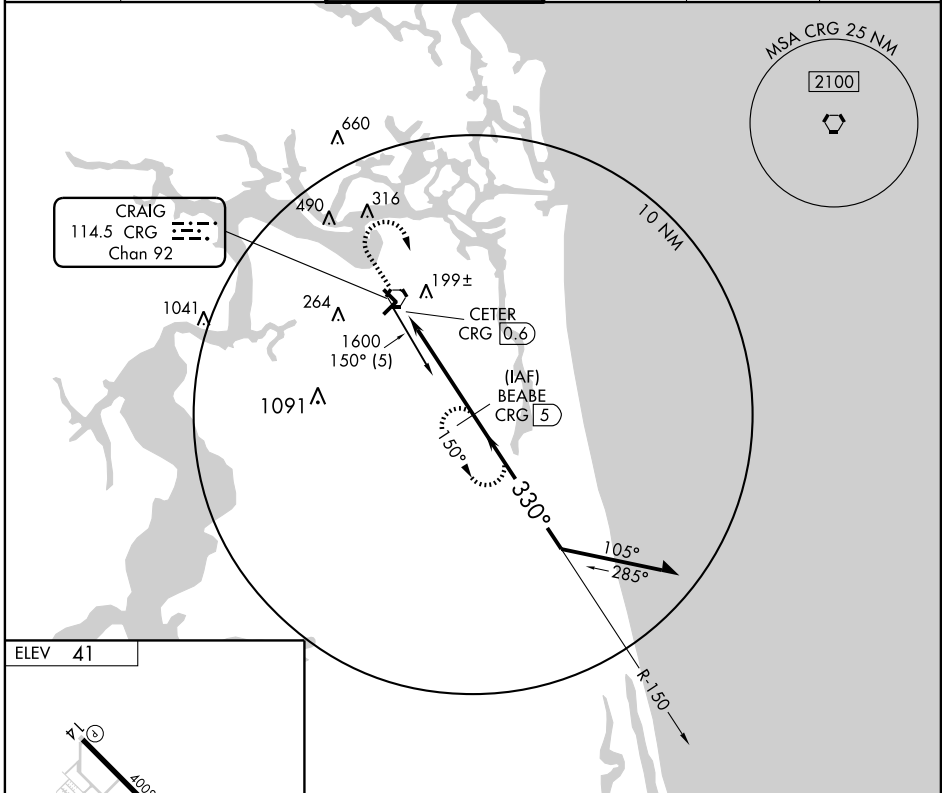

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

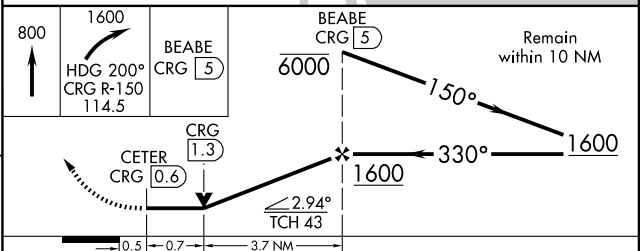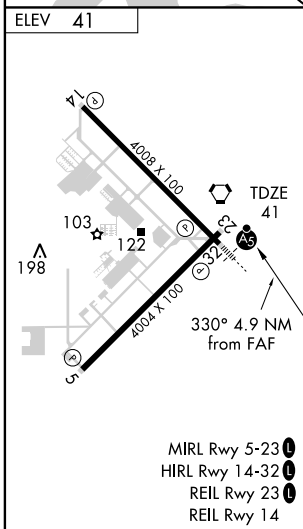

CATEGORY	A	B	C	D
S-32	460-½ 419 (500-½)	419 (500-¾)	460-¾ 419 (500-¾)	460-1 419 (500-1)
CIRCLING	500-1 459 (500-1)	580-1 539 (600-1)	580-1½ 539 (600-1½)	600-2 559 (600-2)