

APCH CRS	Rwy ldg	8002
276°	TDZE	12
	Arpt Elev	20

AL-209 [USN]

JACKSONVILLE NAS (TOWERS FIELD) (KNIP)

▼ * When ALS inop, increase vis CAT ABCD to 1 mile.
 ** When ALS inop, increase vis CAT AB to 1 mile, CAT CD to 1½ miles.
 *** When ALS inop, increase vis CAT ABCD to ½ mile.




MISSED APPROACH: Climbing left turn to 3000 direct DUWOT and hold.

ATIS	JACKSONVILLE APP CON	NAVY JACKSONVILLE TOWER	GND CON	CLNC DEL	ASR/PAR
281.0	123.8 377.05	120.0 340.2	128.6 336.4	134.775 353.675	


DME/DME RNP-0.3 NA.

For uncompensated BARO-VNAV systems, LNAV/VNAV NA below -15°C(5°F) and above 42°C(107°F).

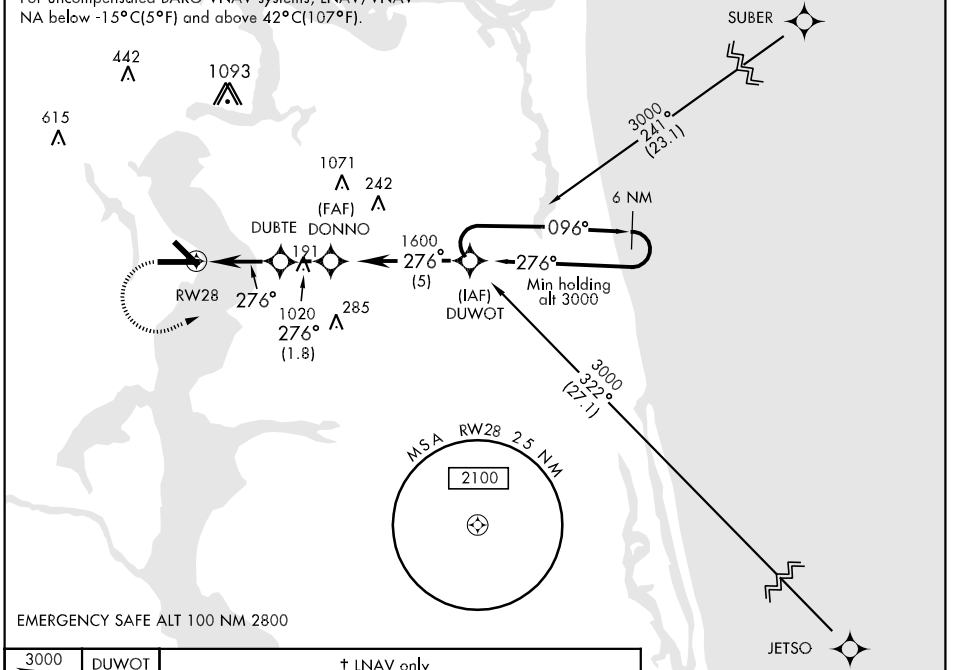

EMERGENCY SAFE ALT 100 NM 2800

CATEGORY	A		B		C		D	
	340-½	328 (400-½)	420-½	408 (400-½)	340-¾	328 (400-¾)	480-1½	580-2
LNAV/VNAV DA*	340-½		328 (400-½)		340-¾		328 (400-¾)	
LNAV MDA**	420-½		408 (400-½)		420-¾		408 (400-¾)	
CIRCLING	480-1		460 (500-1)		480-1½		580-2	
S-PAR 28***	112-¼		100 (100-¼)		GS 3.00°			

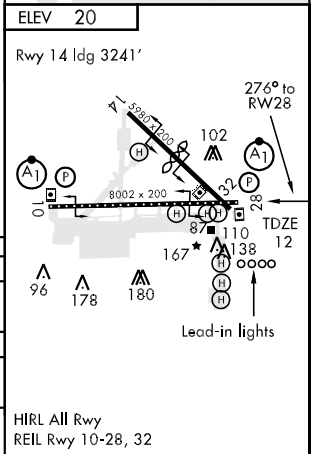

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009