TACAN RWY 21L

NELLIS AFB (KLSV)

TACAN	APCH CRS	Rwy ldg	TDZE	Arpt Elev
LSV Chan 12	207°	10,055	1866	1870

AL-227 [USAF]

▼* When ALS inop, increase CAT AB RVR to 50, vis to 1 mile, CAT C vis to 1¾ miles, CAT D vis to 2 miles, CAT E vis to 2¼ miles.
** Circling not authorized E of Rwy 3R-21L.

ALSF-1

† MISSED APPROACH: Climb to 15,000, heading 209° to 2.5 DME (ROCKX), then climbing right turn heading 020° to join LSV TACAN R-355 to ARCOE and hold.

ATIS	NELLIS APP CON	NELLIS TOWER	GND CON	CLNC DEL
270.1	124.95 273.55	132.55 327.0	121.8 275.8	120.9 289.4

NOT FOR CIVIL USE

Minimum NAVAID reception at ARCOE 15,000'.

MISSED APPROACH requires ATC Radar monitoring.

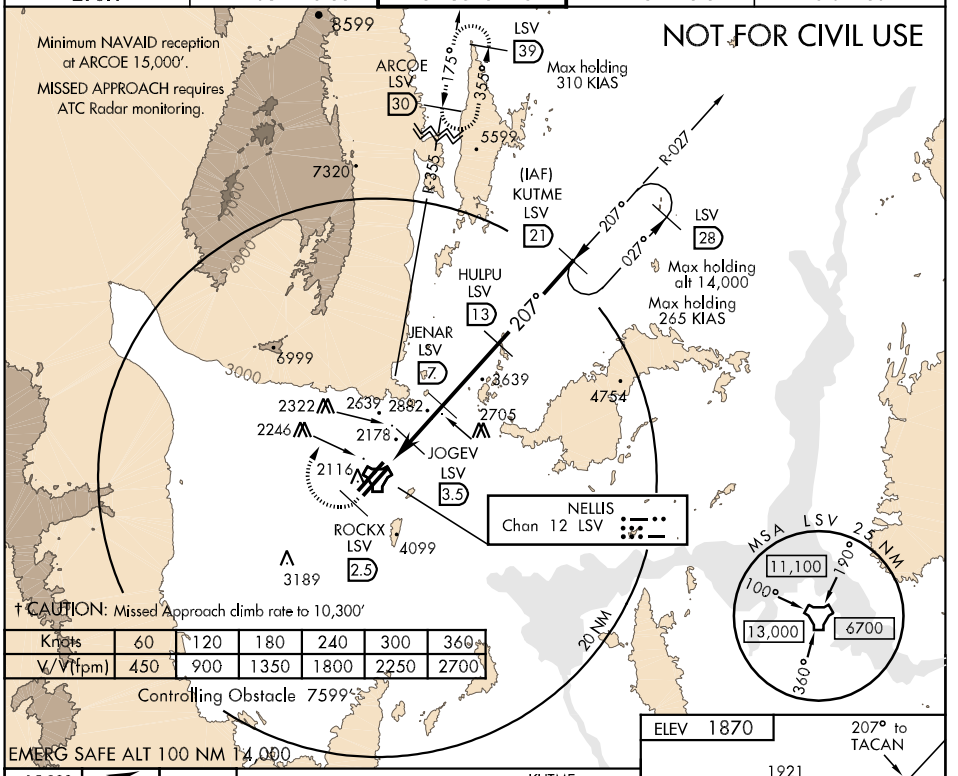

†CAUTION: Missed Approach climb rate to 10,300'

Knots	60	120	180	240	300	360
V_V (fpm)	450	900	1350	1800	2250	2700

Controlling Obstacle 7599'

EMERG SAFE ALT 100 NM 14,000

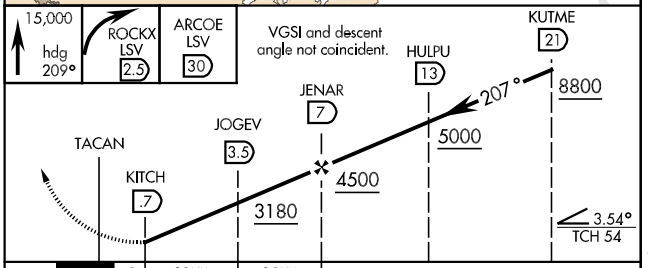

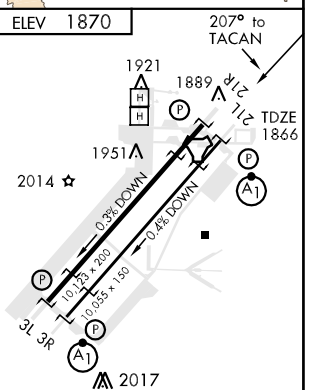

CATEGORY	A	B	C	D	E
S-21L *	2480/50 614 (700-½)		2480/60 614 (700-1¼)	2480-1½ 614 (700-1½)	2480-1¾ 614 (700-1¾)
CIRCLING **	2480-1 610 (700-1)	2680-1¼ 810 (900-1¼)	2680-2¼ 810 (900-2¼)	2680-2½ 810 (900-2½)	2940-3 1070(1100-3)

HIRL all Rwy

SW-4, 22 OCT 2009 to 19 NOV 2009
SW-4, 22 OCT 2009 to 19 NOV 2009