LOC/DME I-BWY	APP CRS	Rwy Idg	8250
110.7	226°	TDZE	260
Chan 44		Apt Elev	262

ILS or LOC RWY 22L

LITTLE ROCK/ADAMS FIELD (LIT)

DME or radar required. VDP NA when using Stuttgart altimeter setting. When local altimeter setting not received, use Stuttgart altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase S-ILS visibility to RVR 6000, S-LOC Cat C visibility to RVR 6000, Cat D to 1½ miles and circling Cat C to 2 miles.

ASR

MALSF

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 via heading 170° and LIT R-230 to BAUDE Int/LIT 18.4 DME and hold.

ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON	CLNC DEL
125.65	135.4 291.775 353.6	118.7 257.8	121.9 339.8	118.95

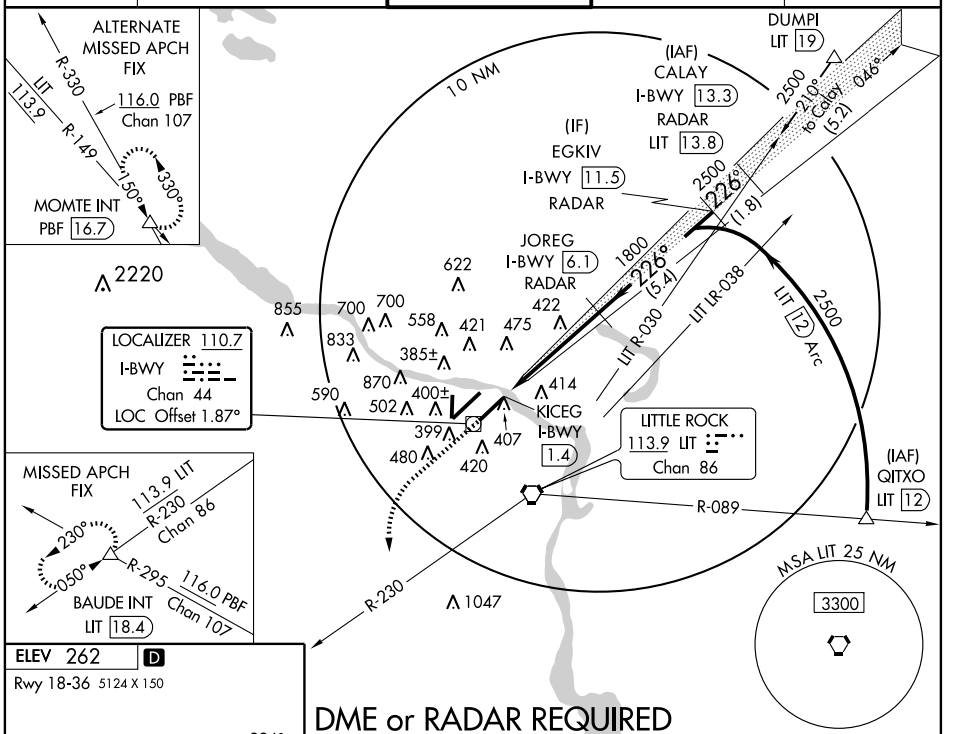

DME or RADAR REQUIRED



TDZ/CL Rwy 22R
HIRL Rwys 4R-22L, 4L-22R and 18-36

FAF to MAP 4.6 NM					
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

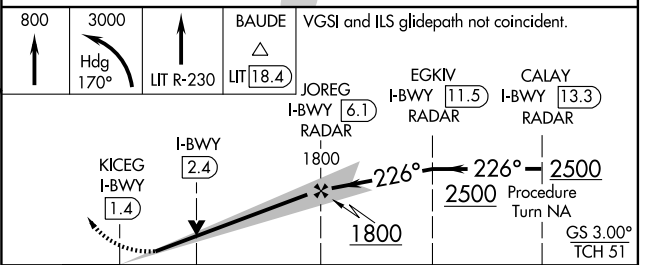

CATEGORY	A	B	C	D
S-ILS 22L	510/40 250 (300-¾)			
S-LOC 22L	640/40 380 (400-¾)			
CIRCLING	800-1 538 (600-1)		880-1¾ 618 (700-1¾)	1180-3 918 (1000-3)

SC-1, 22 OCT 2009 to 19 NOV 2009
SC-1, 22 OCT 2009 to 19 NOV 2009