LOC/DME I-LNR	APP CRS	Rwy Idg	5001
108.35	270°	TDZE	717
Chan 20 (Y)		Apt Elev	717

LOC RWY 27

LONE ROCK/TRI-COUNTY RGNL (LNR)

▼ NA — If local altimeter setting not received, use Boscobel altimeter setting and increase all MDAs 60 feet. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct LNR VOR/DME and hold.

ASOS	MADISON APP CON ★	UNICOM
119.425	135.45 343.7	123.0 (CTAF) Ⓛ

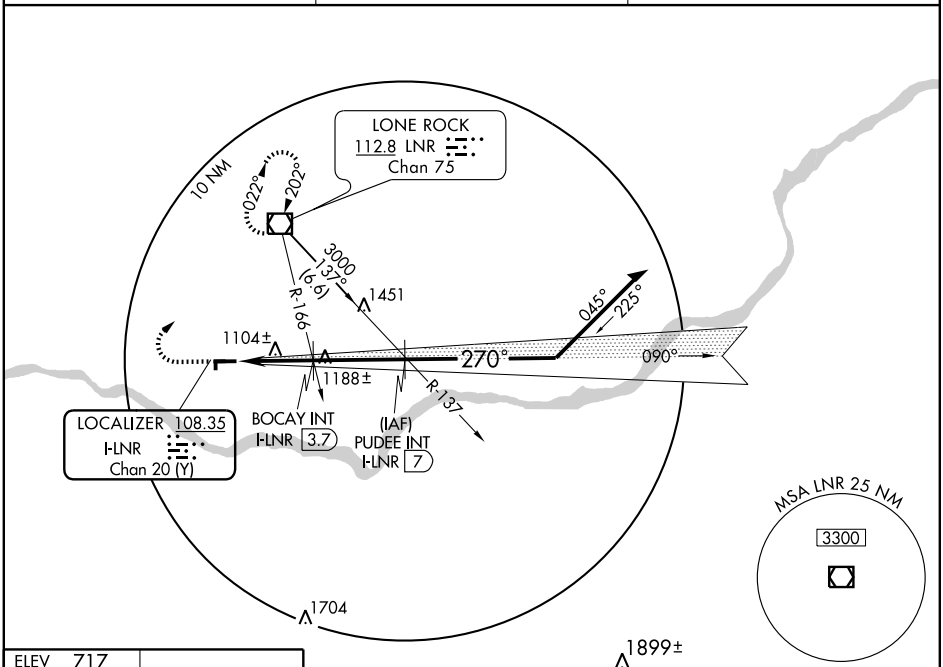

ELEV 717

Rwy 18 ldg 1720′



MIRL Rwys 9-27 and 18-36 Ⓛ

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

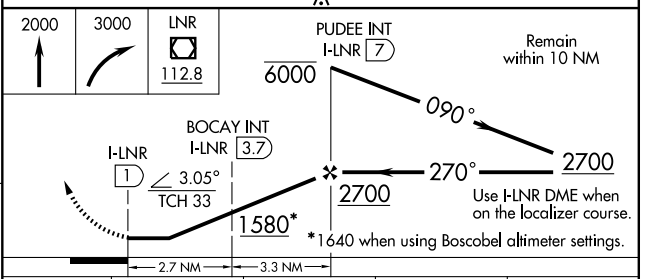

CATEGORY	A	B	C	D
S-27	1580-1 863 (900-1)	1580-1¼ 863 (900-1¼)	1580-2½ 863 (900-2½)	NA
CIRCLING	1580-1 863 (900-1)	1580-1¼ 863 (900-1¼)	1580-2½ 863 (900-2½)	NA
BOCAY FIX MINIMUMS				
S-27	1360-1 643 (700-1)		1360-1¾ 643 (700-1¾)	NA
CIRCLING	1500-1 783 (800-1)	1500-1¼ 783 (800-1¼)	1500-2¼ 783 (800-2¼)	NA

EC-3, 22 OCT 2009 to 19 NOV 2009
EC-3, 22 OCT 2009 to 19 NOV 2009