WAAS	APP CRS	Rwy Idg	10000
CH 86203	348°	TDZE	464
W35A		Apt Elev	501

RNAV (GPS) Y RWY 35L

LOUISVILLE INTL-STANDIFORD FIELD (SDF)

Inoperative table does not apply to LNAV/VNAV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

ALSF-2

MISSED APPROACH: Climb to 3000 direct JUKBU and via 260° track to DAMEN and hold.

ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL
118.725	132.075 327.0 (EAST) 123.675 327.0 (WEST)	124.2 257.8	121.7 348.6	126.1 275.8

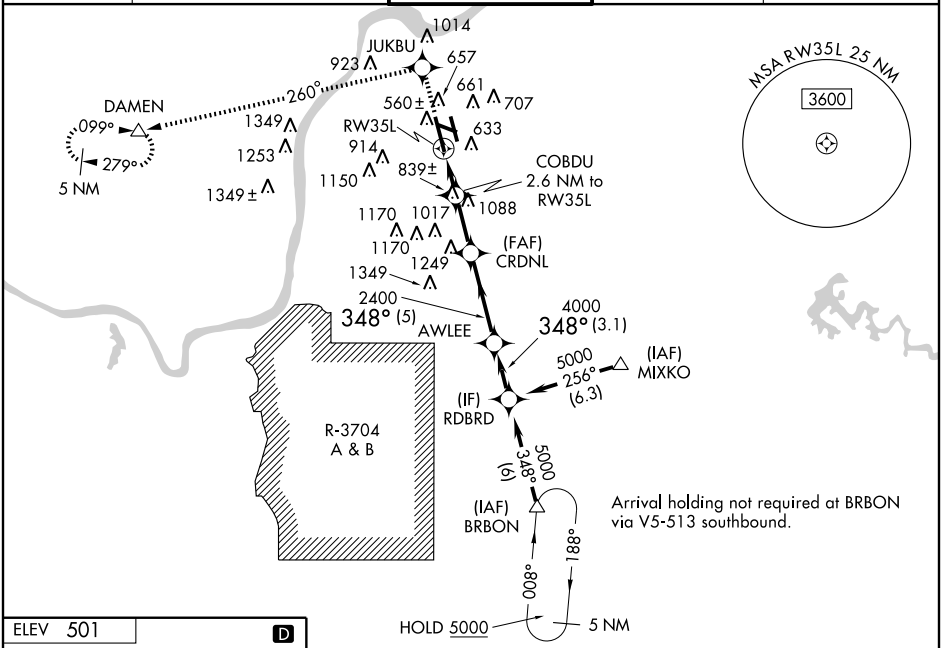

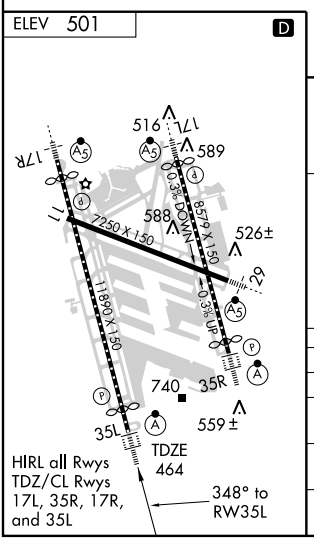

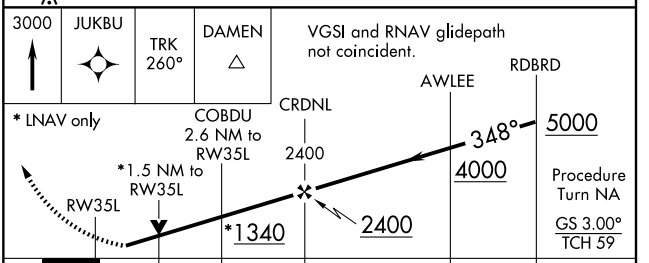

CATEGORY	A	B	C	D
LPV DA	714/24 250 (300-½)			
LNAV/ VNAV DA	1648-5 1184 (1200-5)			
LNAV MDA	1000/24 536 (500-½)		1000/50 536 (500-1)	1000/60 536 (500-1¼)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1140-1¾ 639 (700-1¾)	1140-2 639 (700-2)

SE-1, 22 OCT 2009 to 19 NOV 2009
SE-1, 22 OCT 2009 to 19 NOV 2009