

# DARWIN TWO DEPARTURE

NC-1, 22 OCT 2009 to 19 NOV 2009

### TAKE-OFF MINIMUMS

- Rwy 31: NA-obstacles.
- Rwy 9: Standard with minimum climb of 346' per NM to 1500.
- Rwy 13: Standard with minimum climb of 266' per NM to 1500.
- Rwy 14: Standard with minimum climb of 216' per NM to 1500.
- Rwy 27: Standard with minimum climb of 436' per NM to 1500.
- Rwy 32: Standard with minimum climb of 340' per NM to 3000.

ATIS 118.35  
CLNC DEL  
121.675  
MINNEAPOLIS DEP CON  
121.2 357.4

ST. CLOUD  
112.1 STC  
Chan 58


DARWIN  
109.0 DWN  
Chan 27  
N45°05.25'-W94°27.23'

10000  
(MRA)  
R-095

ABERDEEN  
113.0 ABR  
Chan 77  
L-14, H-2  
N45°25.04'-W98°22.12'



MINNEAPOLIS  
115.3 MSP  
Chan 100  
N44°53.79'-W93°14.19'

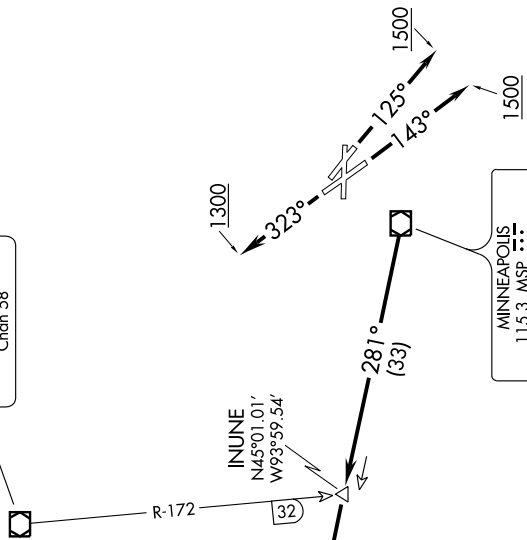

(NARRATIVE ON FOLLOWING PAGE)

NOTE: RADAR required.  
NOTE: Chart not to scale.

NC-1, 22 OCT 2009 to 19 NOV 2009