

LOC/DME I-GEQ 110.5 Chan 42	APP CRS 270°	Rwy Idg 10002 TDZE 581 Apt Elev 590
--	------------------------	---


ILS or LOC RWY 27

MOLINE / QUAD CITY INTL (MLI)

⚠ *1800 RVR authorized with the use of FD or AP or HUD to DA. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet, increase LOC-27 and Circling Cat C/D visibility ¼ mile.



MALSR MISSED APPROACH: Climb to 1100, then climbing left turn to 2300 direct MZV VORTAC and hold.

ATIS 121.2	QUAD CITY APP CON * 125.95 257.8	QUAD CITY TOWER * 119.4 (CTAF) 257.8	GND CON 121.9 257.8	CLNC DEL 124.05	UNICOM 122.95
----------------------	--	--	-------------------------------	---------------------------	-------------------------

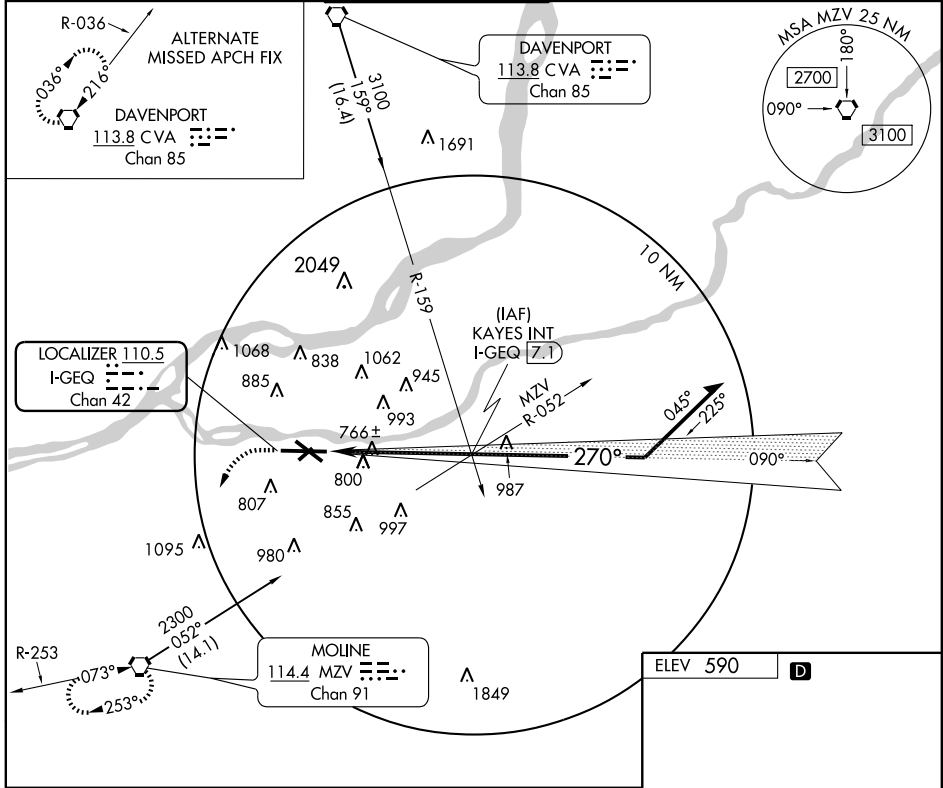

EC-3, 22 OCT 2009 to 19 NOV 2009

EC-3, 22 OCT 2009 to 19 NOV 2009

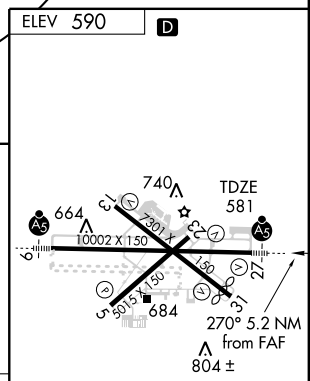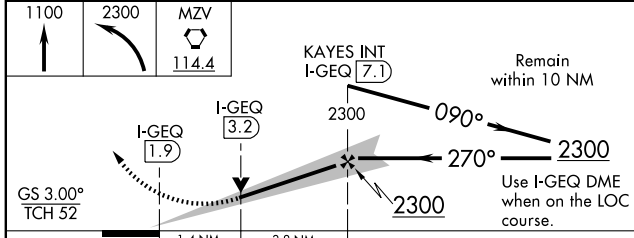

CATEGORY	A	B	C	D
S-ILS 27	*781/24 200 (200-½)			
S-LOC 27	1060/24	479 (500-½)	1060/40 479 (500-¾)	1060/50 479 (500-1)
CIRCLING	1140-1	550 (600-1)	1140-1½ 550 (600-1½)	1260-2 670 (700-2)

MIRL Rwy 5-23
REIL Rwys 13 and 31
HIRL Rwys 9-27 and 13-31

FAF to MAP 5.2 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44