




WAAS CH <b>70510</b> <b>W22A</b>	APP CRS <b>222°</b>	Rwy Idg TDZE Apt Elev	<b>7507</b> <b>78</b> <b>79</b>
----------------------------------------	------------------------	-----------------------------	---------------------------------------

# RNAV (GPS) RWY 22


MONROE RGNL (MLU)

<p>For inoperative MALS/R, increase LPV all Cats visibility to 1 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.</p>	<p>MALS/R</p>	<p>MISSED APPROACH: Climb to 2100 direct KUYRE and hold.</p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------	------------------------------------------------------------------

ATIS <b>125.05</b>	MONROE APP CON * <b>126.9 307.9</b>	MONROE TOWER * <b>118.9 (CTAF) 257.8</b>	GND CON <b>121.9</b>	CLNC DEL <b>121.65</b>	UNICOM <b>122.95</b>
-----------------------	----------------------------------------	---------------------------------------------	-------------------------	---------------------------	-------------------------

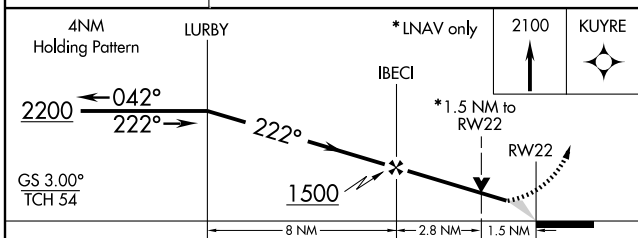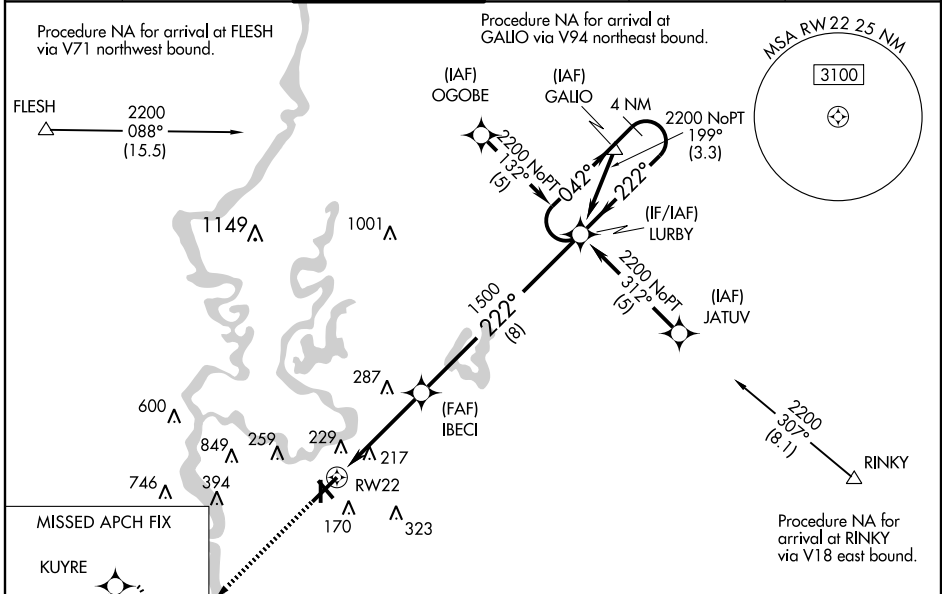

CATEGORY	A	B	C	D
LPV DA		372-1/2	294 (300-1/2)	
LNAV/VNAV DA		514-1	436 (500-1)	
LNAV MDA	600-1/2	522 (600-1/2)	600-1 522 (600-1)	600-1 1/4 522 (600-1 1/4)
CIRCLING	600-1	521 (600-1)	620-1 1/2 541 (600-1 1/2)	640-2 561 (600-2)



SC-4, 22 OCT 2009 to 19 NOV 2009

SC-4, 22 OCT 2009 to 19 NOV 2009