

RNAV (GPS) RWY 4

MONROE RGNL (MLU)


WAAS CH 56410 W04A	APP CRS 042°	Rwy Idg TDZE Apt Elev	7507 78 79
--	------------------------	-----------------------------	---------------------------------------



MISSED APPROACH: Climb to 3000 direct IBECI and left turn via 035° track to GALLO and hold.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.

ATIS 125.05	MONROE APP CON ★ 126.9 307.9	MONROE TOWER ★ 118.9 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	---	-------------------------	---------------------------	-------------------------

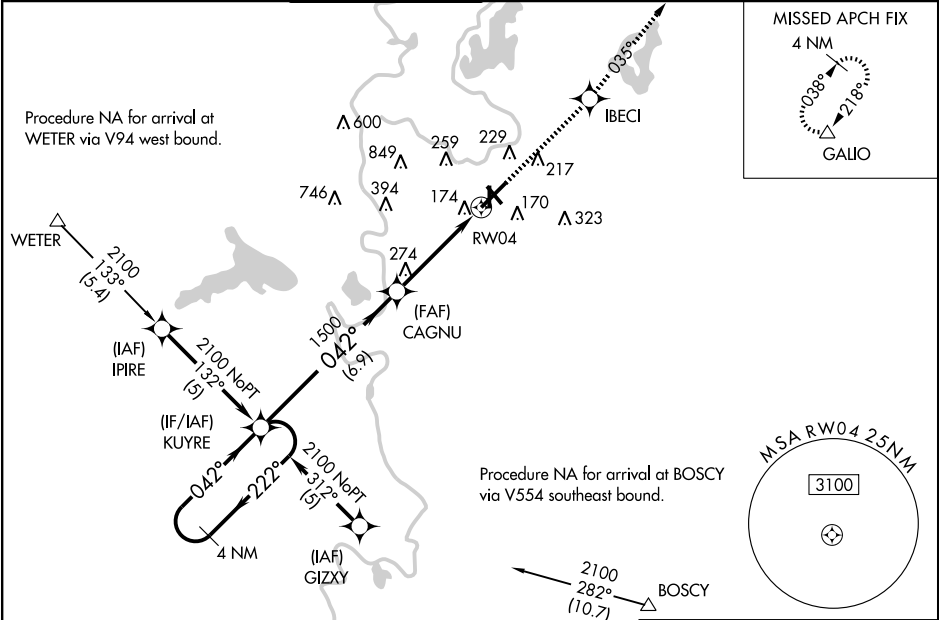

SC-4, 22 OCT 2009 to 19 NOV 2009

SC-4, 22 OCT 2009 to 19 NOV 2009

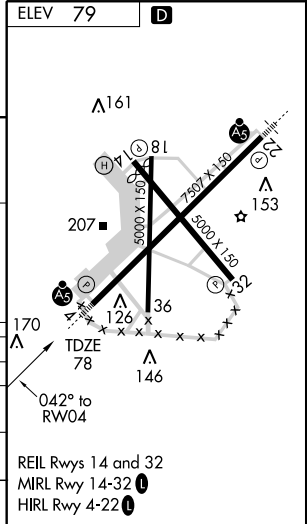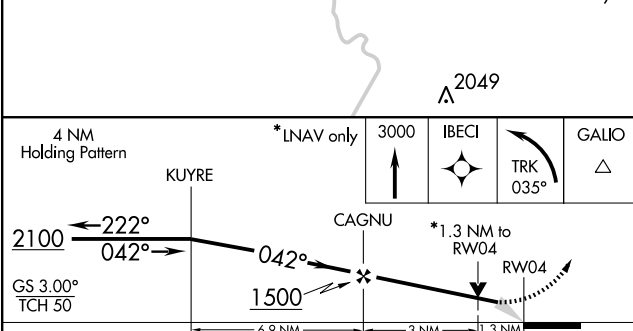

CATEGORY	A	B	C	D
LPV DA		278/24	200 (200-½)	
LNAV/VNAV DA		444-40	366 (400-¾)	
LNAV MDA	540/24	462 (500-½)	540/40 462 (500-¾)	540/50 462 (500-1)
CIRCLING	580-1	501 (600-1)	620-1½ 541 (600-1½)	640-2 561 (600-2)