WAAS	APP CRS	Rwy Idg	9010
CH 50100	097°	TDZE	219
W10A		Apt Elev	221

RNAV (GPS) RWY 10

MONTGOMERY RGNL (DANNELLY FIELD) (MGM)

GPS or RNP-0.3 Required. DME/DME RNP-0.3 NA. Baro-VNAV NA below -15° C (5° F). For inoperative MALSR, increase LPV Cat. E visibility to RVR 5000, LNAV/VNAV Cat. E and LNAV Cat. D/E visibility to 6000. Circling NA at night to Rwy 21.
ASR Circling NA for Cat. E North of Rwy 10-28.

MALSR

MISSED APPROACH: Climb to 2600 direct ICOTE and hold.

ATIS	MONTGOMERY APP CON ★	DANNELLY TOWER ★	GND CON	CLNC DEL
120.675	121.2 380.225	119.7 (CTAF) L 360.85	121.7 348.6	118.3 270.3

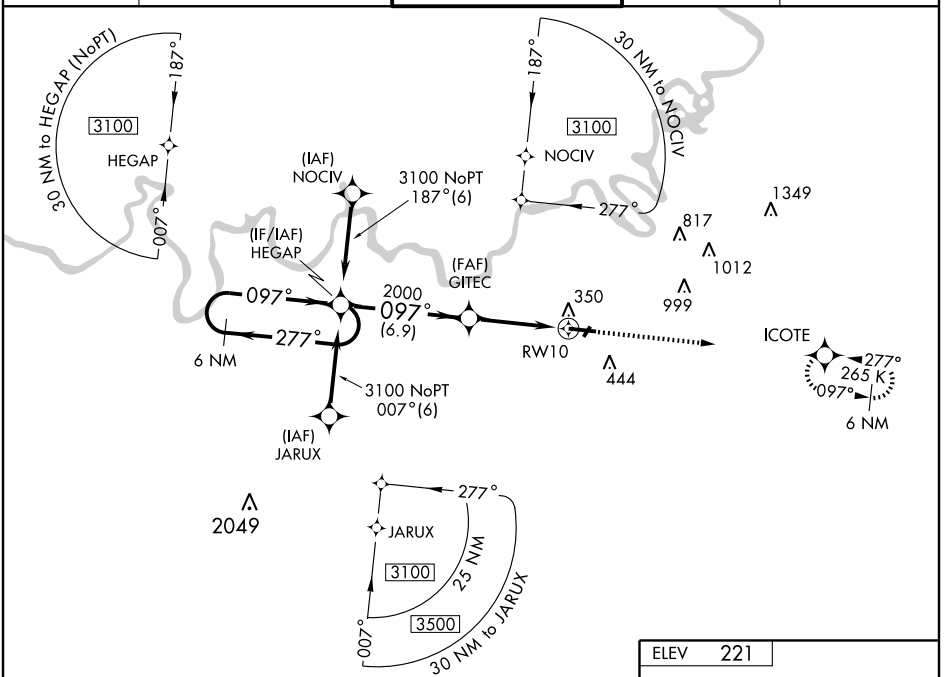

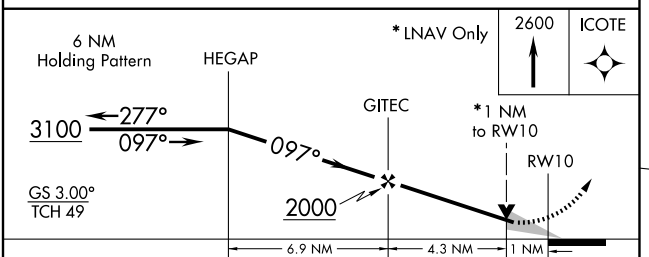

CATEGORY	A	B	C	D	E
LPV DA	500/24 281 (300-½)				
LNAV/ VNAV DA	600/40 381 (400-¾)				
LNAV MDA	600/24 381 (400-½)			600/50 381 (400-1)	
CIRCLING	700-1¼ 479 (500-1¼)		700-1½ 479 (500-1½)	800-2 579 (600-2)	



SE-4, 22 OCT 2009 to 19 NOV 2009
SE-4, 22 OCT 2009 to 19 NOV 2009