RNAV (GPS) RWY 36L

NEW ORLEANS/ LAKEFRONT (NEW)

WAAS CH 86913 W36A	APP CRS 357°	Rwy Idg 6047 TDZE 8 Apt Elev 8

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase all DA 29 feet and all MDA 40 feet and increase LNAV Cat C/D and Circling Cat D visibilities ¼ mile. VDP and Baro-VNAV NA when using Louis Armstrong New Orleans Intl altimeter setting.

MISSED APPROACH: Climb to 2100 direct PNDAR and via track 064° to SNAKI and hold.

ATIS	NEW ORLEANS APP CON	LAKEFRONT TOWER ★	GND CON	CLNC DEL	UNICOM
124.9	NORTH 133.15 290.3 SOUTH 123.85 256.9	119.9 (CTAF)	121.7	127.4	122.95

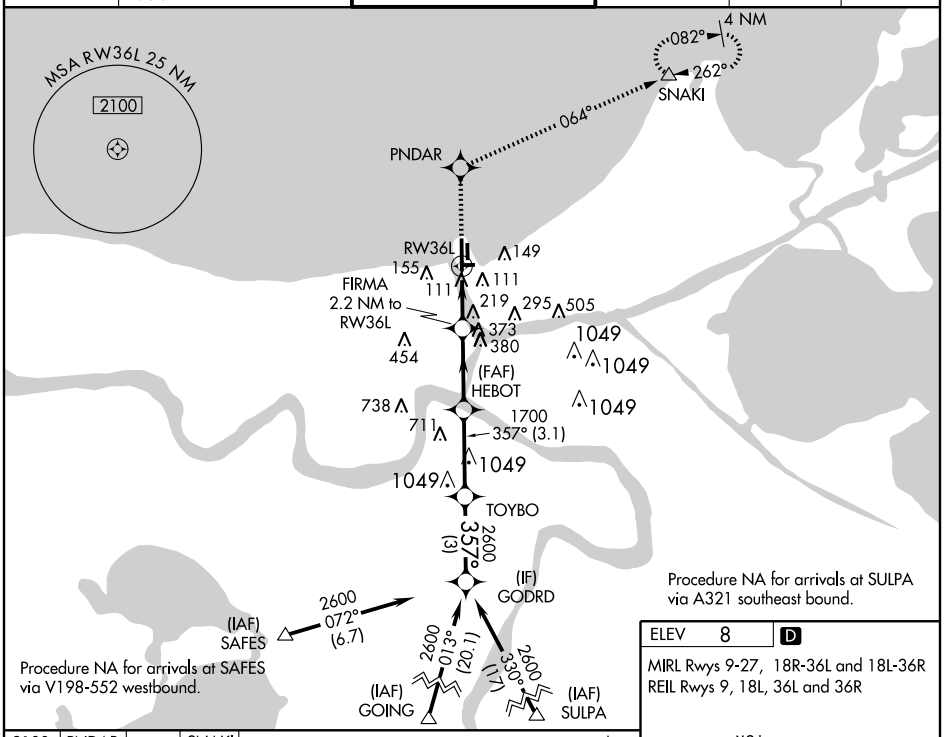

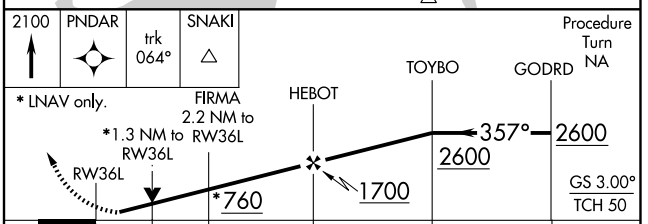

CATEGORY	A	B	C	D
LPV DA	340-1¼ 332 (400-1¼)			
LNAV/VNAV DA	431-1½ 423 (500-1½)			
LNAV MDA	480-1 472 (500-1)		480-1¼ 472 (500-1¼)	480-1½ 472 (500-1½)
CIRCLING	520-1 512 (600-1)		520-1½ 512 (600-1½)	660-2 652 (700-2)

ELEV 8 D

MIRL Rwys 9-27, 18R-36L and 18L-36R
REIL Rwys 9, 18L, 36L and 36R

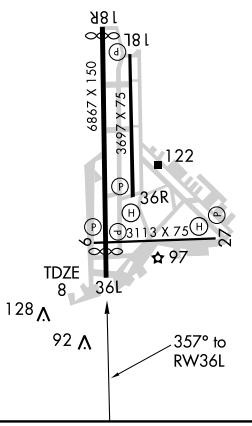

SC-4, 22 OCT 2009 to 19 NOV 2009
SC-4, 22 OCT 2009 to 19 NOV 2009