VORTAC ORL	APP CRS	Rwy Idg	5703
112.2	074°	TDZE	109
Chan 59		Apt Elev	113

VOR/DME RWY 7

ORLANDO/EXECUTIVE (ORL)

For inoperative MALSR, increase S-7 Cat A and B visibility to RVR 5000.
In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights.

MALSR

MISSED APPROACH: NOTE: A descent to 1200 may be required when executing an early missed approach. Climbing left turn to 1200 maximum altitude via ORL R-049 to JUMBA/ORL 1.5 DME then climb to 1500 via ORL R-049 to OVIDO/ORL 13 DME and hold.

ATIS	ORLANDO APP CON	EXECUTIVE TOWER ★	GND CON	CLNC DEL	UNICOM
127.25	124.8 351.9	118.7(CTAF) L 239.0	121.4 239.0	128.45	122.95

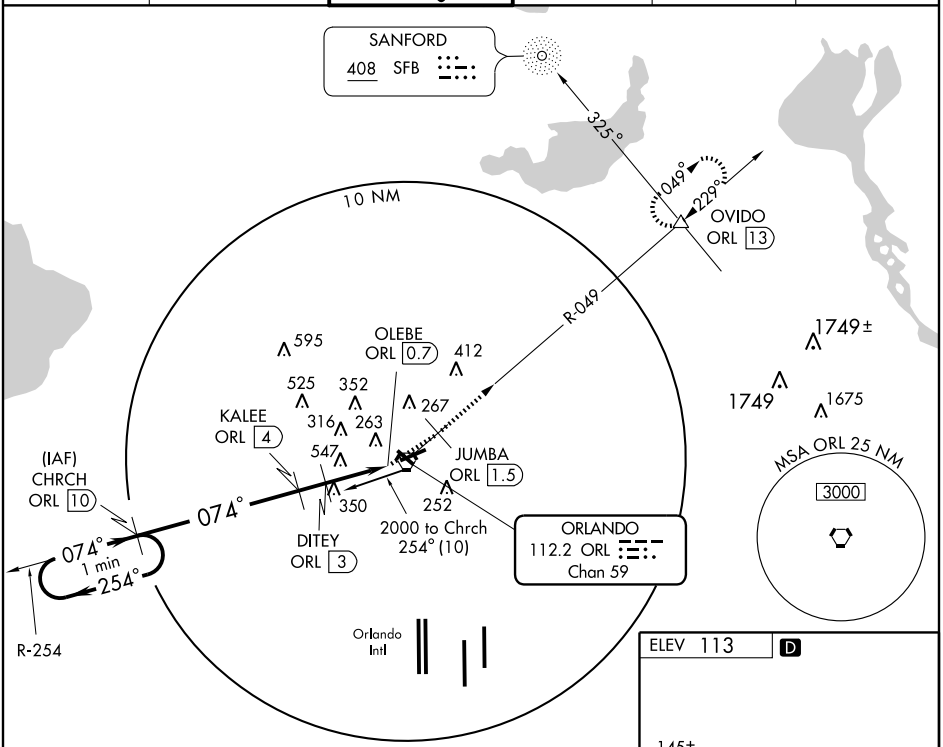

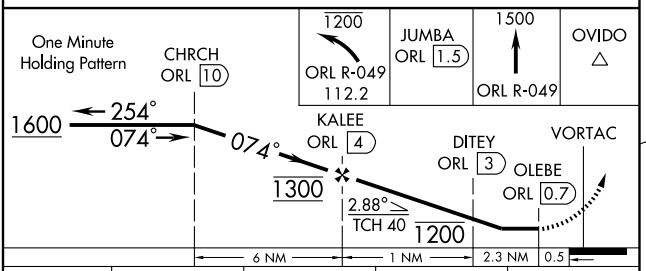

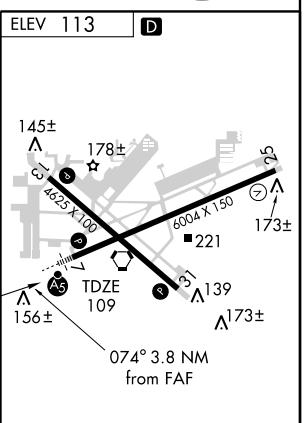

CATEGORY	A	B	C	D
S-7	800/40 691 (700-¾)		800-1½ 691 (700-1½)	800-1¾ 691 (700-1¾)
CIRCLING	800-1 687 (700-1)		800-2 687 (700-2)	860-2½ 747 (800-2½)

REIL Rwys 13, 25 and 31 L
HIRL Rwys 7-25 and 13-31 L

SE-3, 22 OCT 2009 to 19 NOV 2009
SE-3, 22 OCT 2009 to 19 NOV 2009