LOC I-PQI	APP CRS	Rwy Idg	7439
108.7	006°	TDZE	478
		Apt Elev	534

ILS or LOC RWY 1

PRESQUE ISLE/
NORTHERN MAINE RGNL ARPT AT PRESQUE ISLE (PQI)

When local altimeter setting not received, use Houlton Intl altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase S-LOC 1 Cats. C and D and Circling Cat. C visibility ¼ mile, increase Circling Cat. D visibility ½ mile, increase HATEN Fix Minimums S-LOC 1 Cat. C and Circling Cat. C visibility ¼ mile, increase S-LOC 1 Cat. D and Circling Cat. D visibility ½ mile. For inoperative MALSR when using Houlton Intl altimeter setting, increase S-ILS-1 all Cats. visibility to 1 mile.
** LOC only, 1140 when using Houlton Intl altimeter setting.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct PQI VOR/DME and hold, continue climb-in-hold to 3000.

AWOS-3	BOSTON CENTER	CLNC DEL	UNICOM	
118.025	124.75 239.05	121.6	122.8 (CTAF)	122.6 L

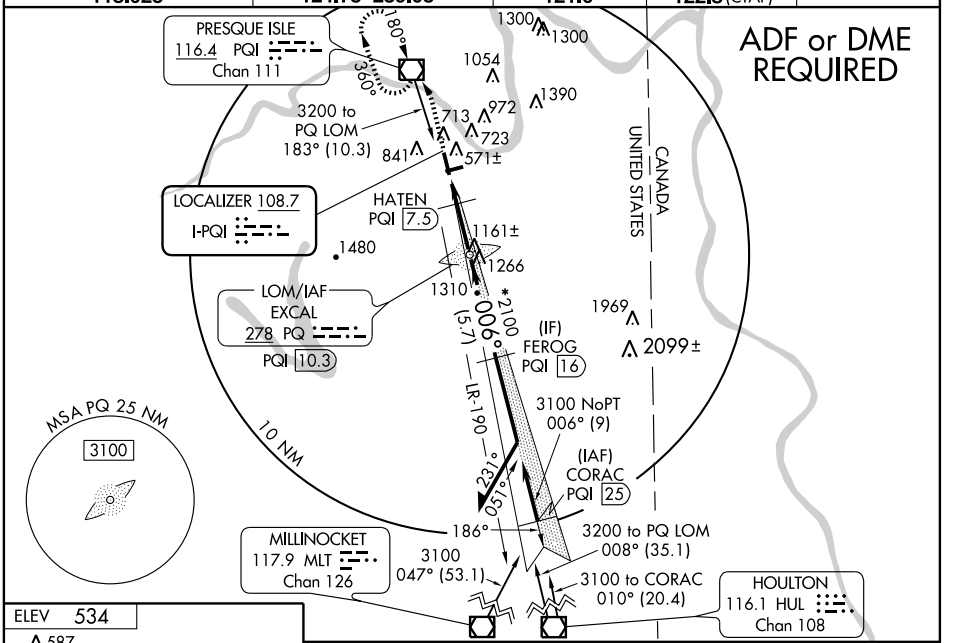

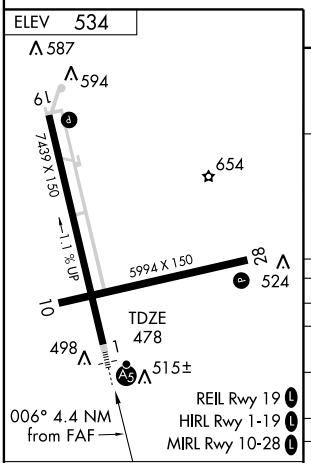

FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

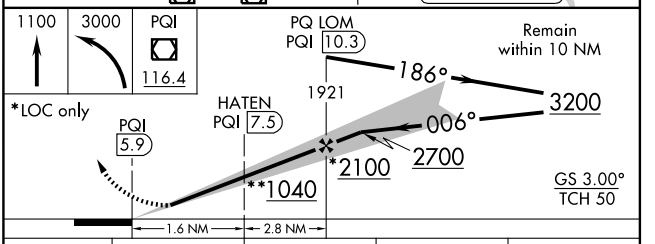

CATEGORY	A	B	C	D
S-ILS 1	678-½ 200 (200-½)			
S-LOC 1	1040-½ 562 (600-½)		1040-1 562 (600-1)	1040-1¼ 562 (600-1¼)
CIRCLING	1120-1 586 (600-1)	1160-1 626 (700-1)	1160-1¾ 626 (700-1¾)	1200-2 666 (700-2)
HATEN FIX MINIMUMS				
S-LOC 1	900-½ 422 (500-½)		900-¾ 422 (500-¾)	
CIRCLING	1120-1 586 (600-1)	1160-1 626 (700-1)	1160-1¾ 626 (700-1¾)	1200-2 666 (700-2)

NE-1, 22 OCT 2009 to 19 NOV 2009