

RNAV (GPS) RWY 15




RED BLUFF MUNI (RBL)

WAAS CH 73008 W15A	APP CRS 151°	Rwy Idg TDZE Apt Elev	5700 352 352
--	------------------------	-----------------------------	---

⚠ Baro-VNAV NA when using Redding altimeter setting.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F).
 DME/DME RNP- 0.3 NA. Visibility reduction by helicopters NA.
 When local altimeter setting not received; use Redding altimeter setting and increase all DA/MDA 80 feet and increase LPV visibility ¼ mile all Cats, LNAV/ VNAV visibility ½ mile all Cats, LNAV visibility ½ mile Cat C and D.

MISSED APPROACH: Climb to 3500 direct TOWAN and hold.

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) Ⓛ
------------------------	--------------------------------------	--

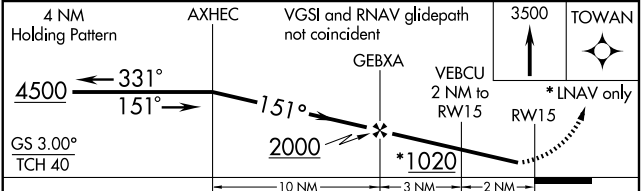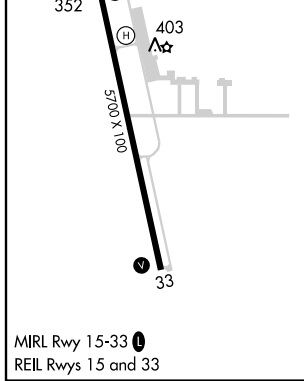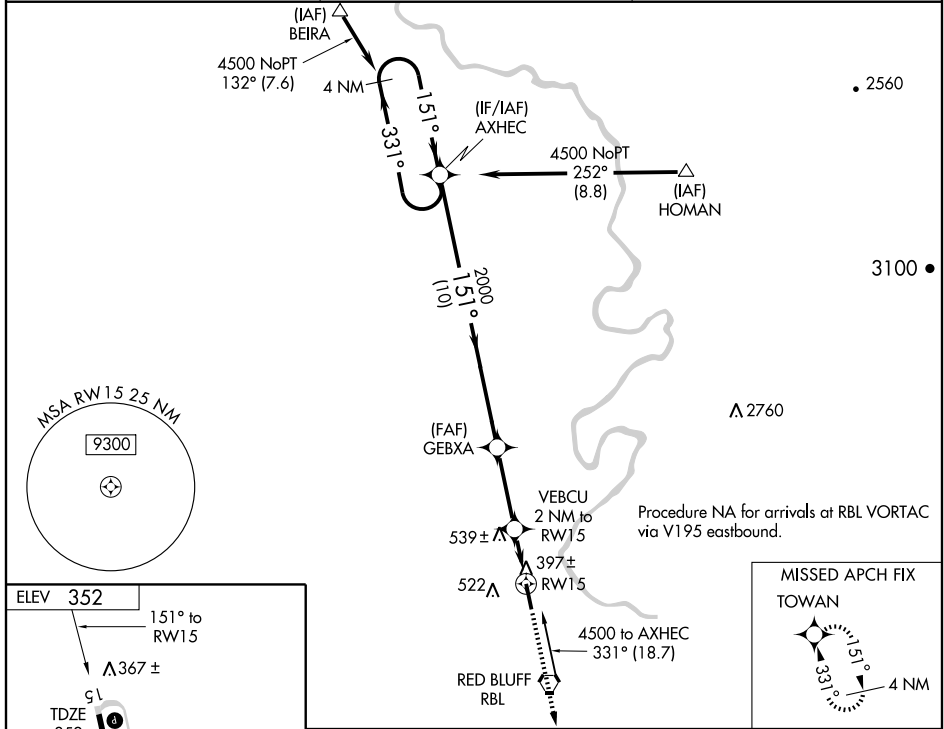

CATEGORY	A	B	C	D
LPV DA	602-1 250 (300-1)			
LNAV/VNAV DA	789-1½ 437 (500-1½)			
LNAV MDA	820-1 468 (500-1)	820-1¼ 468 (500-1¼)	820-1½ 468 (500-1½)	820-1½ 468 (500-1½)
CIRCLING	840-1 488 (500-1)	840-1½ 488 (500-1½)	920-2 568 (600-2)	

SW-2, 22 OCT 2009 to 19 NOV 2009

SW-2, 22 OCT 2009 to 19 NOV 2009