WAAS	APP CRS	Rwy Idg	7505
CH 77613	033°	TDZE	786
W03A		Apt Elev	809

AL-369 (FAA)

RNAV (GPS) RWY 3

SAN ANTONIO INTL (SAT)

Inoperative table does not apply to LNAV/VNAV, and LNAV Cat C. Circling NA southwest of Rwy 12R-30L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MALS

MISSED APPROACH: Climb to 3500 direct BISGE and via track 026° to SHEPE and hold.

ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7

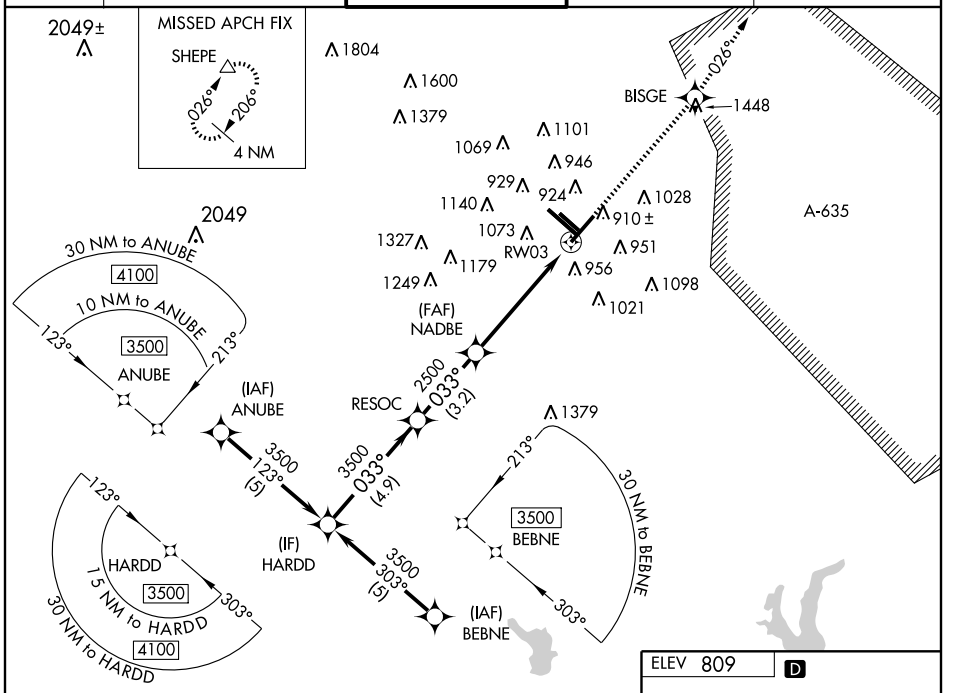

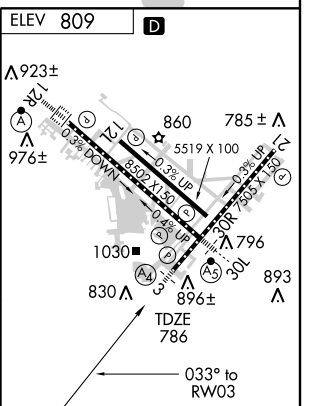

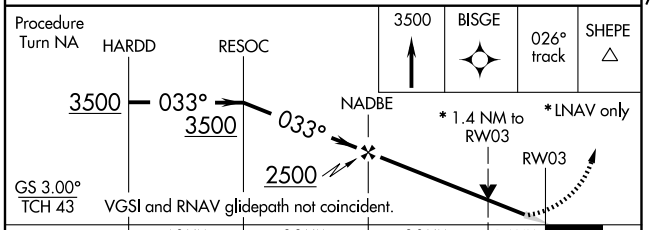

CATEGORY	A	B	C	D
LPV DA	986/40 200 (200-¾)			
LNAV/VNAV DA	1360-2 574 (600-2)			
LNAV MDA	1280/40 494 (500-¾)		1280/60 494 (500-1¼)	1280-1½ 494 (500-1½)
CIRCLING	1300-1 491 (500-1)		1320-1½ 511 (600-1½)	1380-2 571 (600-2)

SC-3, 22 OCT 2009 to 19 NOV 2009