
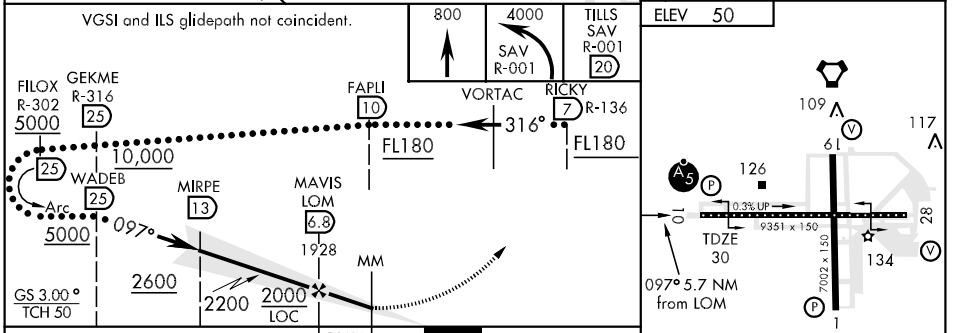


LOC I-SAV 109.9	APCH CRS 097°	Rwy Idg TDZE Arpt Elev 9351 30 50	JAL-380 [USAF]	SAVANNAH/HILTON HEAD INTL (KSAV)
Procedure NA when Control Tower closed. * When ALS inop, increase CAT CDE to ¾ mile. ** When ALS inop, increase CAT CD vis to 1¼ miles and CAT E vis to 1½ miles.		MALSRL	MISSED APPROACH: Climb to 800, then climbing left turn to 4000 via heading 330° and SAV VORTAC R-001 to TILLS/SAV 20 DME and hold.	

ATIS ★ 123.75	SAVANNAH APP CON 125.3 353.775	SAVANNAH TOWER ★ 119.1 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775
-------------------------	--	---	-------------------------------	-----------------------------------

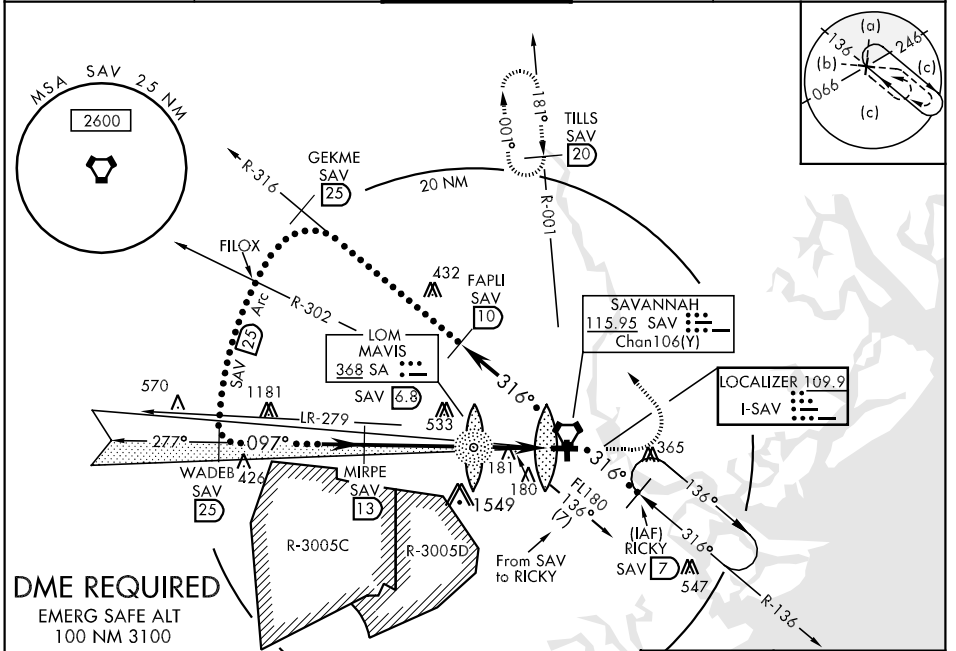

CATEGORY	C	D	E
S-ILS 10 *	230/24	200	(200-½)
S-LOC 10 **	440/40 410 (500-¾)		440/50 410 (500-1)
CIRCLING	520-1½ 470 (500-1½)	700-2 650 (700-2)	900-3 850 (900-3)

REIL Rws 1 and 28					
HIRL all Rwy					
FAF to MAP 5.7 NM					
Knots	120	140	160	180	200
Min:Sec	2:51	2:27	2:08	1:54	1:43

SE-4, 22 OCT 2009 to 19 NOV 2009

SE-4, 22 OCT 2009 to 19 NOV 2009