

WAAS CH 40015 W28A	APP CRS 277°	Rwy Idg TDZE Apt Elev	9351 50 50
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) Z RWY 28

SAVANNAH/ HILTON HEAD INTL (SAV)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hilton Head Island, SC altimeter setting and increase all DA 65 feet and all MDA 80 feet and LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cats C/D visibilities ¼ mile. VDP and Baro-VNAV NA when using Hilton Head Island altimeter setting.




▲ MISSED APPROACH: Climb to 2600 direct TILEE and hold.

ATIS 123.75	SAVANNAH APP CON* 125.3 371.875	SAVANNAH TOWER* 119.1 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775	UNICOM 122.95
-----------------------	---	--	-------------------------------	-----------------------------------	-------------------------

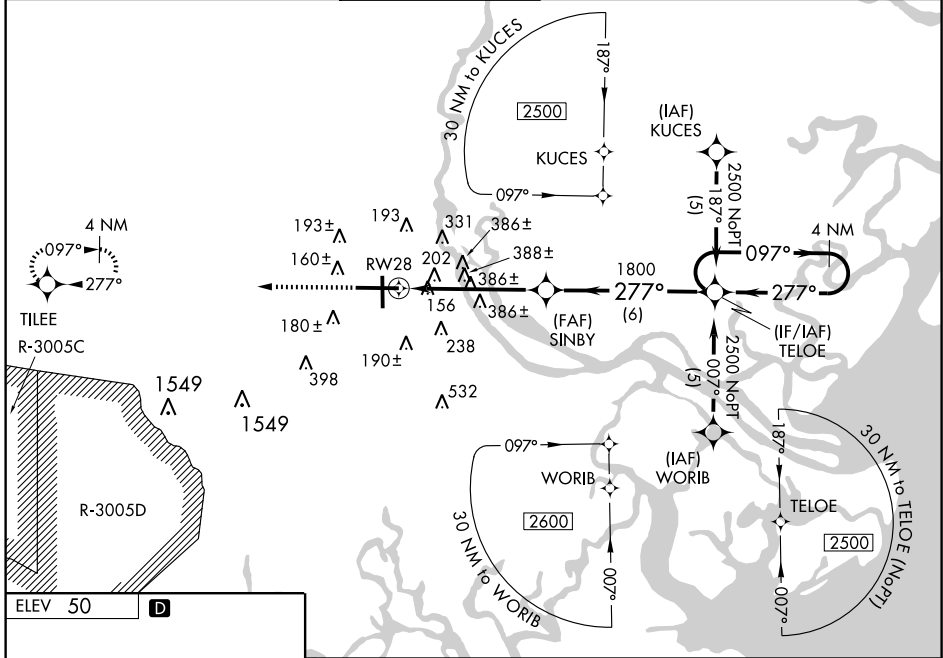

SE-4, 22 OCT 2009 to 19 NOV 2009

SE-4, 22 OCT 2009 to 19 NOV 2009

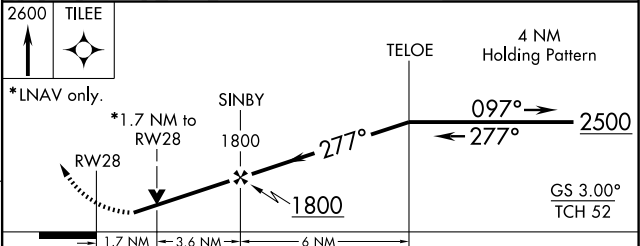

CATEGORY	A	B	C	D
LPV DA		307-1	257 (300-1)	
LNAV/VNAV DA		431-1¼	381 (400-1¼)	
LNAV MDA	640-1	590 (600-1)	640-1½ 590 (600-1½)	640-1¾ 590 (600-1¾)
CIRCLING	640-1	590 (600-1)	640-1½ 590 (600-1½)	700-2 650 (700-2)