WAAS CH 97399 W14A	APP CRS 135°	Rwy Idg 5018 TDZE 179 Apt Elev 179

RNAV (GPS) RWY 14
SHREVEPORT DOWNTOWN (DTN)

Procedure NA at night. DME/DME RNP-0.3 NA. If local altimeter setting not received, use Shreveport Rgnl altimeter setting and increase all DAs/MDAs 40 feet. Baro-VNAV NA below -15°C (5°F). Baro-VNAV NA when using Shreveport Rgnl altimeter setting.

MISSED APPROACH: Climb to 3100 direct GOCTE and left turn via 132° track to EMG VORTAC and hold.

ASOS	SHREVEPORT APP CON	DOWNTOWN TOWER ★	GND CON	CLNC DEL	UNICOM
118.525	119.9 335.55	120.225 (CTAF) 284.6	121.65	120.75 (When tower closed)	122.95

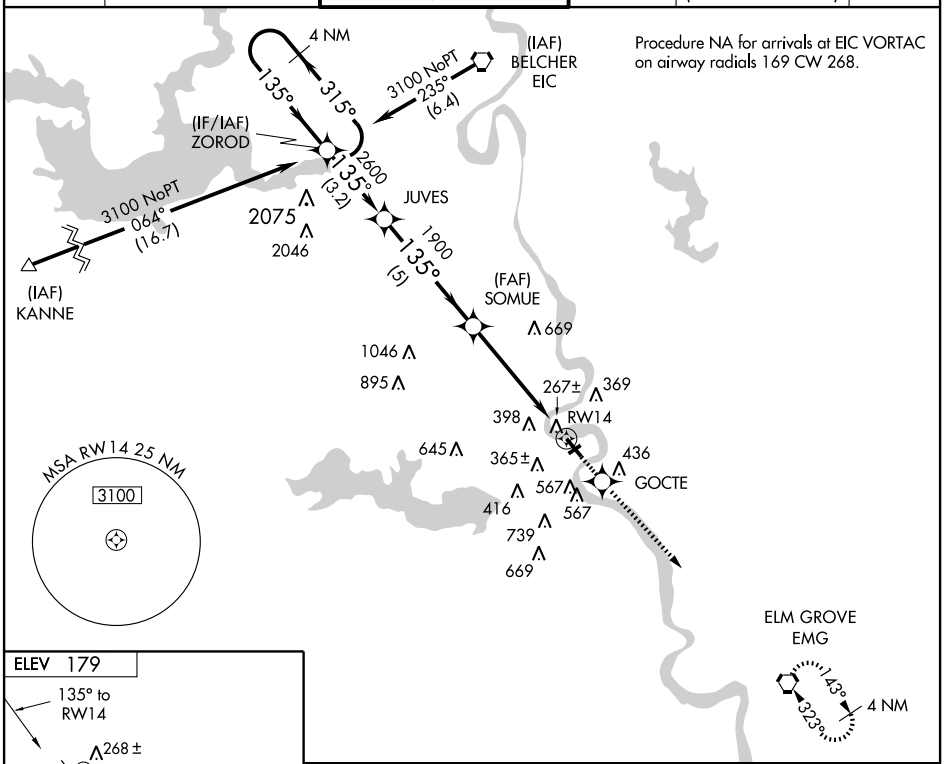

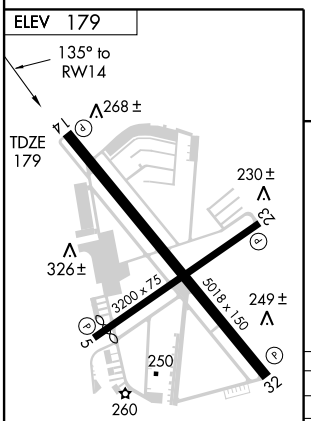

MIRL Rwy 5-23
HIRL Rwy 14-32
REIL Rwys 5, 14, 23 and 32

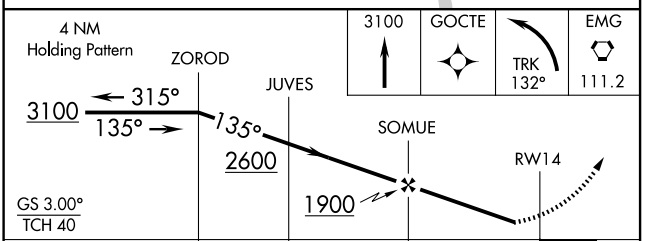

CATEGORY	A	B	C	D
LPV DA	488-1 309 (400-1)			
LNAV/VNAV DA	697-1¾ 518 (600-1¾)			
LNAV MDA	800-1 621 (700-1)		800-1¾ 621 (700-1¾)	800-2 621 (700-2)
CIRCLING	800-1¾ 621 (700-1¾)	920-1¾ 741 (800-1¾)	920-2¼ 741 (800-2¼)	920-2½ 741 (800-2½)

SC-4, 22 OCT 2009 to 19 NOV 2009
SC-4, 22 OCT 2009 to 19 NOV 2009