ILS or LOC RWY 9R
SOUTH BEND RGNL (SBN)

LOC I-UXW	APP CRS	Rwy Idg	8414
109.3	092°	TDZE	790
		Apt Elev	799

Inoperative table does not apply to S-LOC 9R Cat C. Autopilot coupled approach NA below 900. Visibility reduction by helicopters NA. ADF REQUIRED.

MALS

MISSED APPROACH: Climb to 2600 direct MISHA LOM/Int and hold.

ATIS	SOUTH BEND APP CON★	SOUTH BEND TOWER★	GND CON	CLNC DEL	UNICOM
118.15	118.55 257.8	118.9 (CTAF) L 257.8	121.7	121.9	122.95

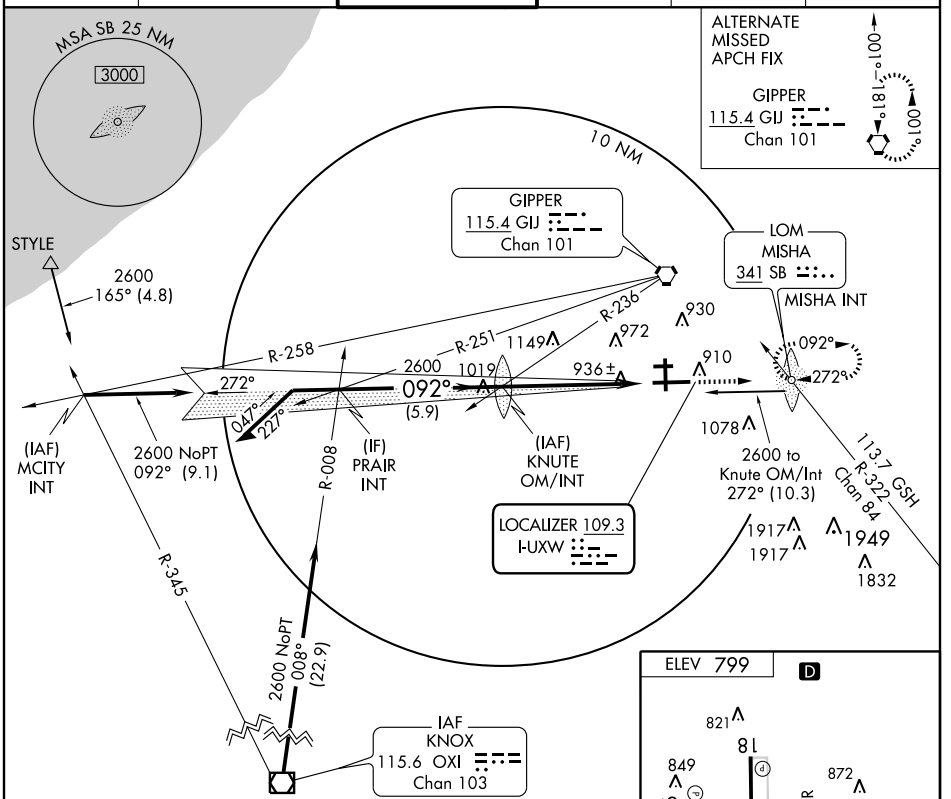

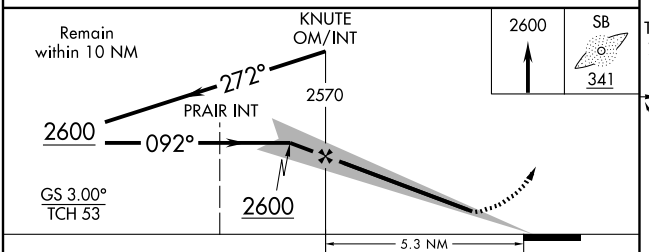

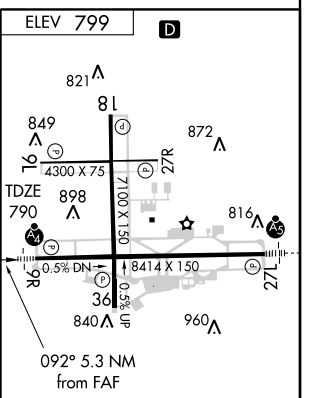

CATEGORY	A	B	C	D
S-ILS 9R	1040-¾ 250 (300-¾)			
S-LOC 9R	1200-¾ 410 (500-¾)		1200-1¼ 410 (500-1¼)	
CIRCLING	1260-1 461 (500-1)	1280-1 481 (500-1)	1280-1½ 481 (500-1½)	1360-2 561 (600-2)

HIRL Rwy 9R-27L
MIRL Rwy 18-36 and 9L-27R

FAF to MAP 5.3 NM

Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

EC-2, 22 OCT 2009 to 19 NOV 2009
EC-2, 22 OCT 2009 to 19 NOV 2009