ATIS
124.175 283.0
CLNC DEL
380.8
GND CON
121.85 336.4
MOFFETT TOWER*
119.55 (CTAF) 346.25
NORCAL DEP CON
120.1 290.25

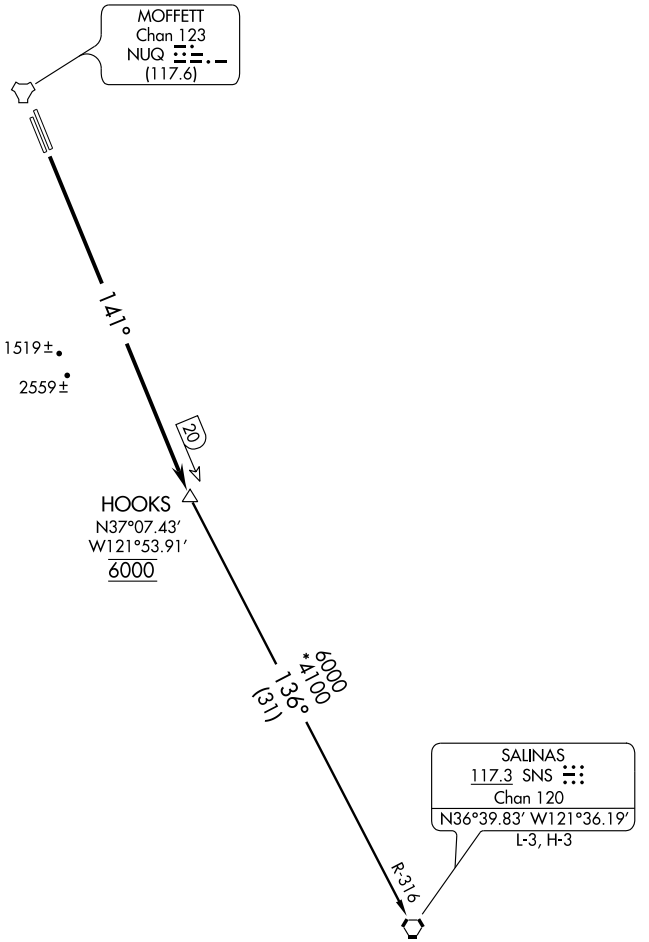

NOTE: TACAN required.

TAKE-OFF MINIMUMS
Rwy 14R/14L: Standard with the following minimum climb gradients:
Rwy 14R: Obstacle climb of 314' per NM to 4900, ATC climb of 332' per NM to 6000.
Rwy 14L: Obstacle climb of 314' per NM to 4900, ATC climb of 328' per NM to 6000.
Rwy 32R/32L: NA, ATC.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RUNWAYS 14L/14R: Climb via NUQ R-141 to cross HOOKS/NUQ 20 DME at 6000, thence . . . .

. . . . via (transition).

VALLEY TRANSITION (HOOKS1.SNS): From over HOOKS DME via SNS R-316 to SNS VORTAC.

SW-2, 22 OCT 2009 to 19 NOV 2009