LOC I-FOE	APP CRS	Rwy Idg 12802
110.1	312°	TDZE 1037
Chan 38		Apt Elev 1078

ILS or LOC RWY 31

TOPEKA/ FORBES FIELD (FOE)

T For inoperative MALSR, increase S-ILS 31 Cat E visibility to RVR 4000; and S-LOC Cat D visibility to RVR 6000, Cat E to 1½. * Visibility Cat A/B/C/D RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1900 then climbing left turn to 3500 via heading 275° and TOP R-231 to DIETS INT and hold.

ATIS	KANSAS CITY CENTER	FORBES TOWER*	GND CON	UNICOM
128.25	123.8 343.7	120.8 (CTAF) L 340.2	121.7 275.8	122.95

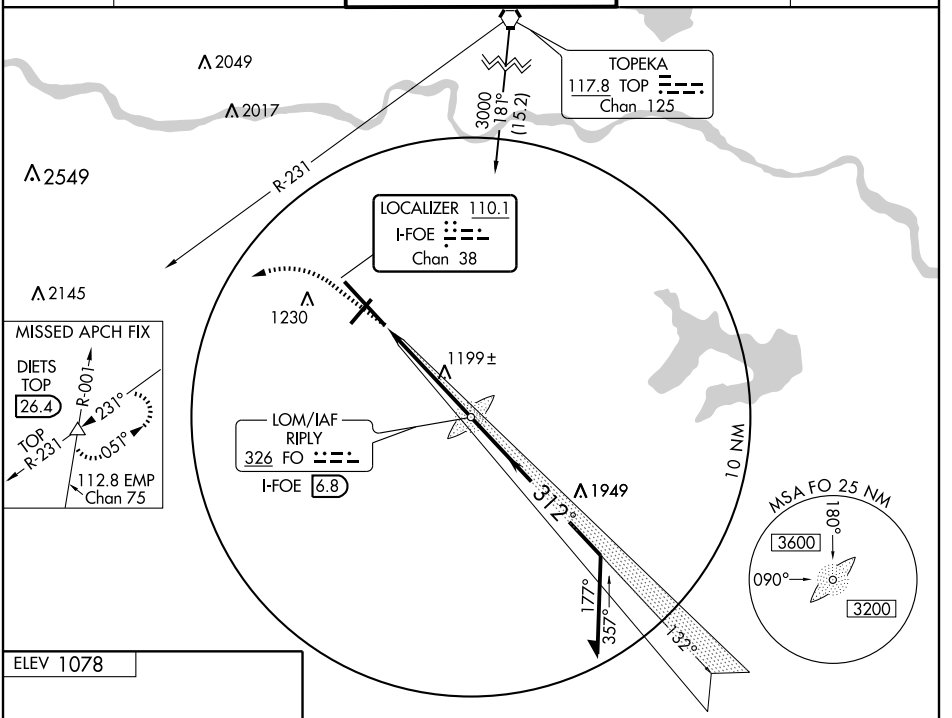

NC-2, 22 OCT 2009 to 19 NOV 2009

NC-2, 22 OCT 2009 to 19 NOV 2009

Cat E procedure turn NA, radar required.

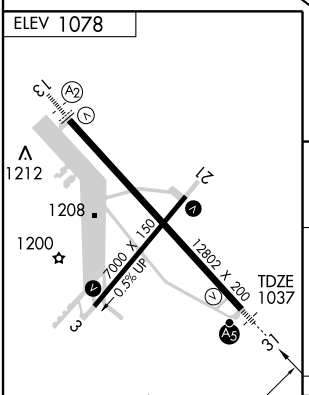

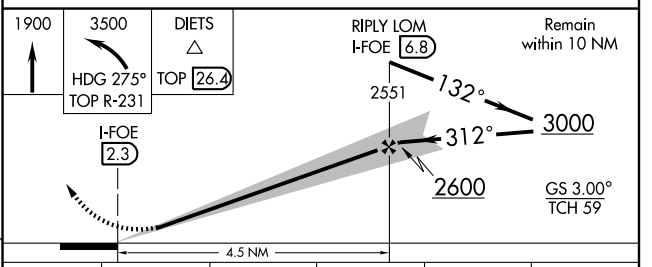

FAF to MAP 4.5 NM					
Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

CATEGORY	A	B	C	D	E
S-ILS 31	*1237/24 200 (200-½)				
S-LOC 31	1460/24 423 (400-½)		1460/40 423 (400-¾)	1460/50 423 (400-1)	
CIRCLING	1520-1 442 (500-1)	1580-1 502 (600-1)	1580-1½ 502 (600-1½)	1640-2 562 (600-2)	1720-2¼ 642 (700-2¼)