WAAS CH 82701 W11A	APP CRS 123°	Rwy Idg 10996 TDZE 2599 Apt Elev 2643

RNAV (GPS) Z RWY 11L

TUCSON INTL (TUS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 43°C (111°F). DME/DME RNP- 0.3 NA.
For inoperative MALSR, increase LPV visibility to RVR 5000 all Cats, LNAV/VNAV visibility Cat E to RVR 6000, LNAV visibility Cat E to 2 ¼.

MALSR

MISSED APPROACH: Climb to 6000 (CAT E 8000) via direct CURGA and via 213° track to REBDE and via 303° track to TOYOP and hold.

ATIS	TUCSON APP CON	TUCSON TOWER	GND CON	CLNC DEL
123.8 279.65	119.4 318.1	118.3 257.8	124.4 348.6	126.65 326.2

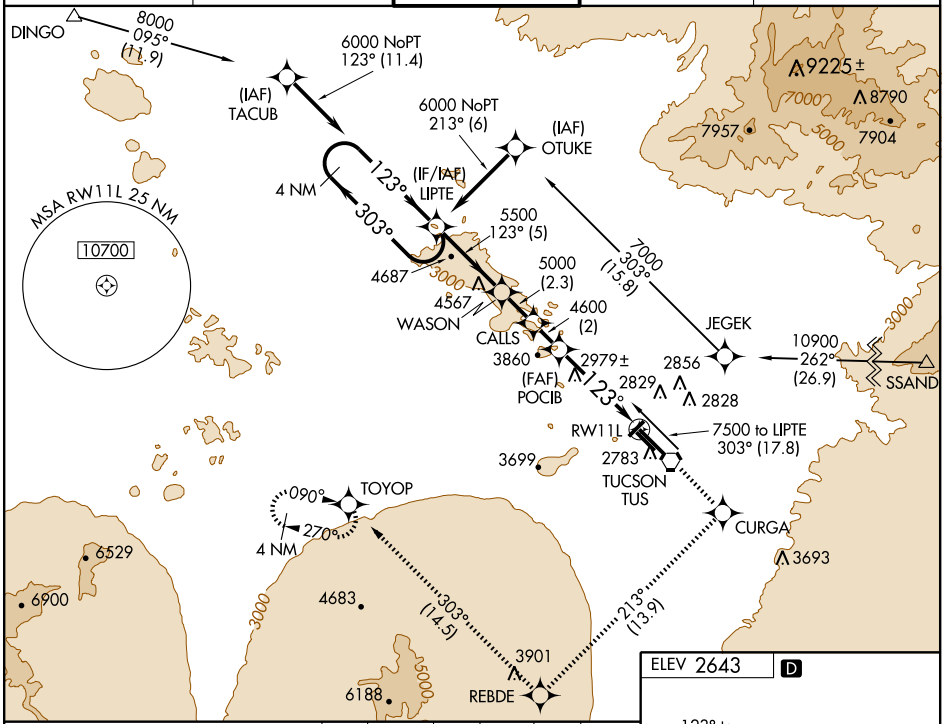

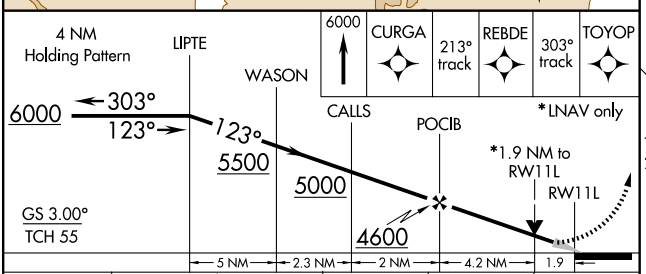

CATEGORY	A	B	C	D	E
LPV DA	2849/24 250 (300-½)				
LNAV/VNAV DA	2956/40 357 (400-¾)				
LNAV MDA	3240/24 641 (600-½)		3240/60 641 (600-1¼)	3240-1½ 641 (600-1½)	3240-1¾ 641 (600-1¾)
CIRCLING	3240-1 597 (600-1)		3240-1½ 597 (600-1½)	3240-2 597 (600-2)	3740-3 1097 (1100-3)

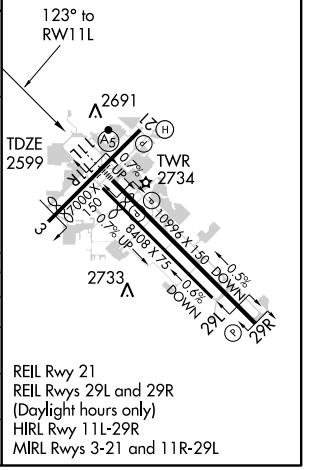

REIL Rwy 21
REIL Rwys 29L and 29R (Daylight hours only)
HIRL Rwy 11L-29R
MIRL Rwys 3-21 and 11R-29L

SW-4, 22 OCT 2009 to 19 NOV 2009
SW-4, 22 OCT 2009 to 19 NOV 2009