# ILS Y RWY 19 or LOC Y RWY 19

| LOC I-CAH | APCH CRS | Rwy ldg 10,012 |
|---|---|---|
| 109.1 | 192° | TDZE 65 |
| Chan 28 | | Arpt Elev 87 |

AL-436 [USAF] EGLIN AFB (KVPS)

* When ALS inop, increase CAT AB RVR to 40 and vis to ¾ mile, CAT CDE increase RVR to 50 and vis to 1 mile.
** When ALS inop, increase CAT AB RVR to 50 and vis to 1 mile, CAT CD RVR to 60 and vis to 1¼ miles, CAT E vis to 1½ miles.

ALSF-1

MISSED APPROACH: Climb straight ahead to 3000 to CEW R-170/35 DME (MRCEE), then as directed by ATC.

| ATIS ★ | EGLIN APP CON | EGLIN TOWER | GND CON | CLNC DEL |
|---|---|---|---|---|
| 134.625 273.5 | 125.1 281.45 271°- 089°<br>132.1 360.6 090°- 270° | 118.2 353.65 | 121.8 335.8 | 127.7 377.2 |

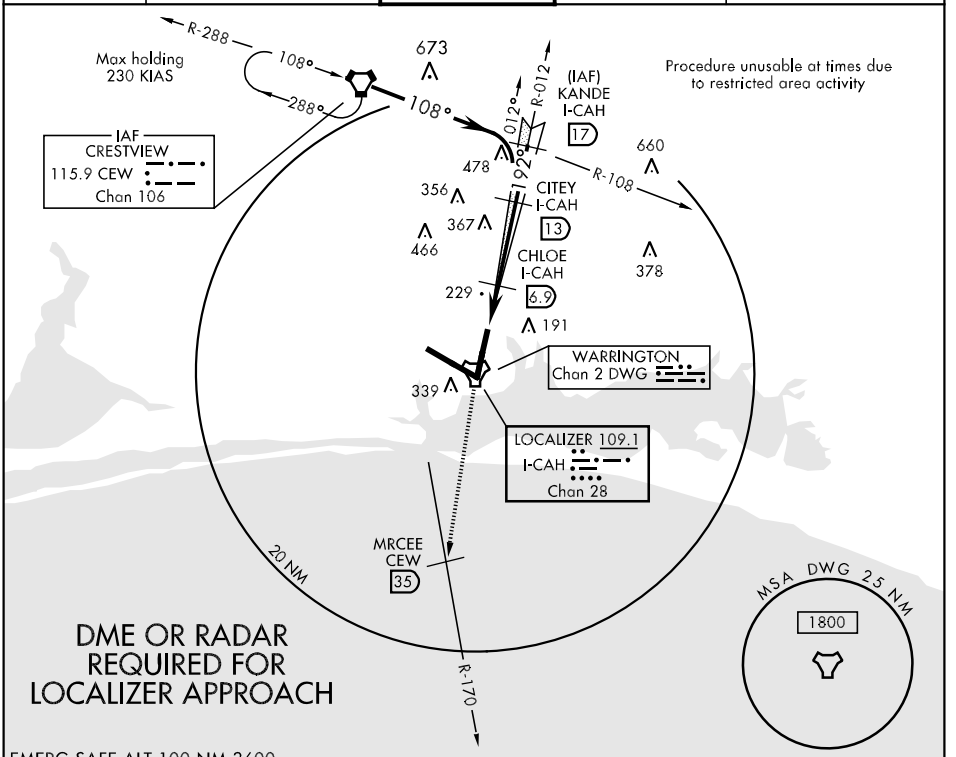


ELEV 87

192° 5.1 NM from CHLOE

HIRL Rwy 1-19, 12-30




† Rwy 19 apch lgt 1500' nonstandard.

LOC FAF to MAP 4.6 NM

| Knots | 60 | 90 | 120 | 150 | 180 | 200 |
|---|---|---|---|---|---|---|
| Min:Sec | 4:36 | 3:04 | 2:18 | 1:50 | 1:32 | 1:23 |

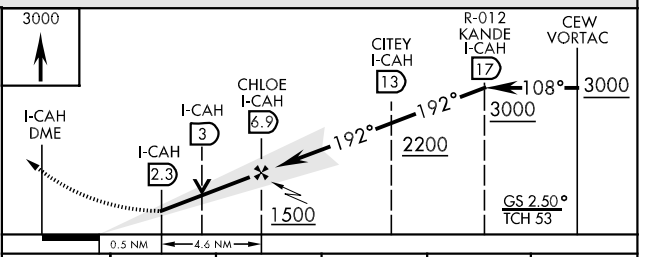


| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| S-ILS 19 * | 265/24 200 (200-½) | | 265/40 200 (200-¾) | | |
| S-LOC 19 ** | 480/24 415 (400-½) | | 480/40 415 (400-¾) | | 480/50 415 (400-1) |
| CIRCLING | 580-1 493 (500-1) | | 580-1½ 493 (500-1½) | 700-2 613 (700-2) | 700-2¼ 613 (700-2¼) |



SE-3, 22 OCT 2009 to 19 NOV 2009
SE-3, 22 OCT 2009 to 19 NOV 2009