

RNAV (GPS) RWY 11R


VERO BEACH MUNI (VRB)

WAAS CH 53511 W11A	APP CRS 115°	Rwy Idg TDZE Apt Elev	7314 23 24
--	------------------------	-----------------------------	---------------------------------------

▼ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 48° C (118° F).
▲ Baro-VNAV NA when using Fort Pierce altimeter setting. When local altimeter setting not received, use Fort Pierce altimeter setting and increase all DA 23 feet and all MDA 40 feet and Circling Cat. D visibility ¼ mile.



MISSED APPROACH:
Climb to 2700 direct PUUMA and hold.

ATIS 132.5	MIAMI CENTER 132.25 370.9	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	CLNC DEL 134.975	UNICOM 122.95
----------------------	-------------------------------------	---	--------------------------	----------------------------	-------------------------

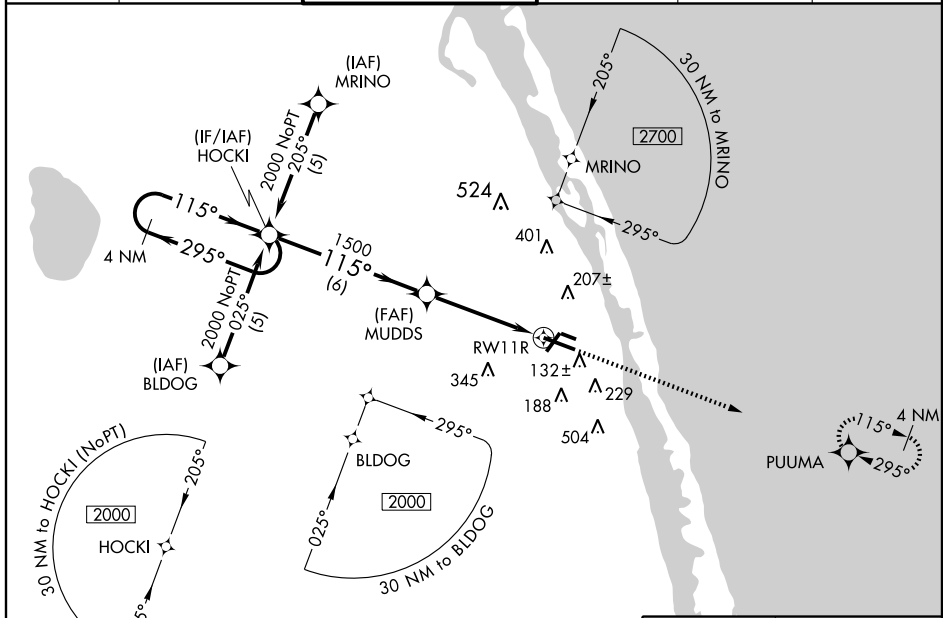

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009

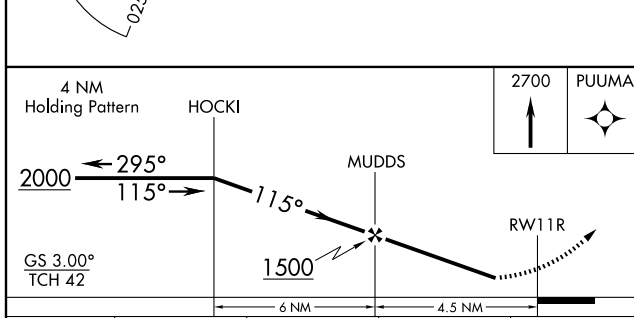

CATEGORY	A	B	C	D
LPV DA	305-1		282 (300-1)	
LNAV/VNAV DA	364-1¼		341 (400-1¼)	
LNAV MDA	380-1		357 (400-1)	
CIRCLING	560-1	536 (600-1)	560-1½	660-2
			536 (600-1½)	636 (700-2)

MIRL Rwy 4-22 and 11L-29R
 REIL Rwy 11R and 29L
 MIRL Rwy 11R-29L
 REIL Rwy 4 and 22