LOC/DME I-ATY	APP CRS	Rwy Idg	6894
111.9	354°	TDZE	1745
Chan 56		Apt Elev	1749

ILS or LOC RWY 35
WATERTOWN RGNL (ATY)

T S-LOC 35 DME minimums, increase Cat D visibility ¼ mile for inoperative MALSR.

MALSR

MISSED APPROACH: Climb to 4000 then left turn direct LICAN LOM/I-ATY 7.3 DME and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
126.625	128.5 306.2	123.05 (CTAF) L

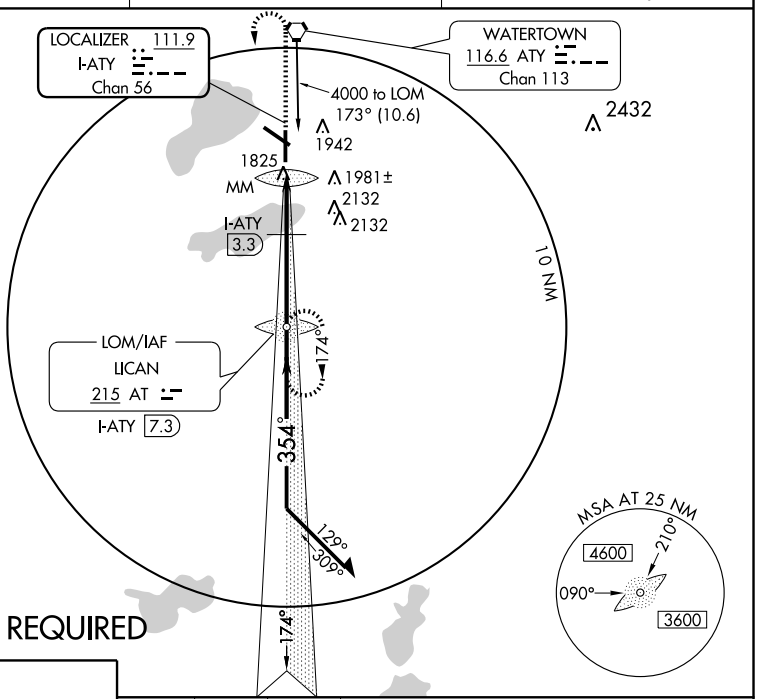

ADF or DME REQUIRED

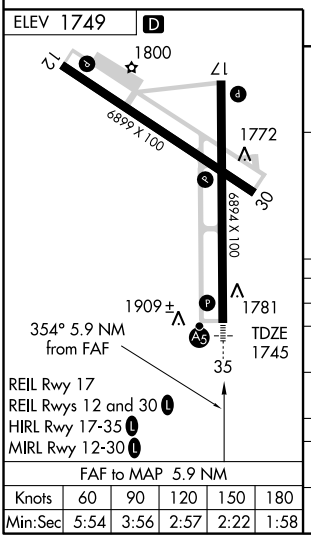

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

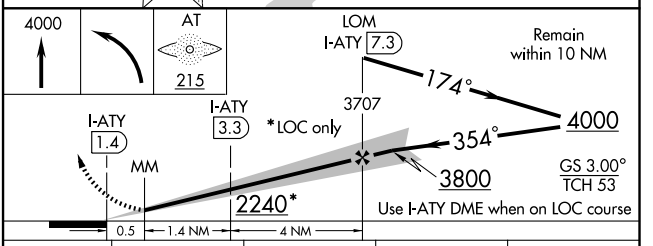

CATEGORY	A	B	C	D
S-ILS 35	1945-½	200 (200-½)		
S-LOC 35	2240-½ 495 (500-½)		2240-¾ 495 (500-¾)	2240-1 495 (500-1)
CIRCLING	2260-1 511 (600-1)		2260-1½ 511 (600-1½)	2340-2 591 (600-2)
DME MINIMUMS				
S-LOC 35	2080-½ 335 (400-½)			2080-¾ 335 (400-¾)
CIRCLING	2260-1 511 (600-1)		2260-1½ 511 (600-1½)	2340-2 591 (600-2)

NC-1, 22 OCT 2009 to 19 NOV 2009
NC-1, 22 OCT 2009 to 19 NOV 2009