RNAV (GPS) RWY 22

LIBERAL MID-AMERICA RGNL (LBL)

WAAS CH 90405 W22A	APP CRS 215°	Rwy Idg 5721 TDZE 2877 Apt Elev 2885

▼ If local altimeter setting not received, use Guymon Muni altimeter setting and increase all DAs 112 feet and all MDAs 120 feet. BARO-VNAV NA when using ▲ Guymon Muni altimeter setting. For uncompensated BARO-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Circling NA east of Rwy 17-35. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 4800 direct PERDE and hold.

AWOS-3	KANSAS CITY CENTER	UNICOM
118.375	134.0 298.0	122.8 (CTAF) L

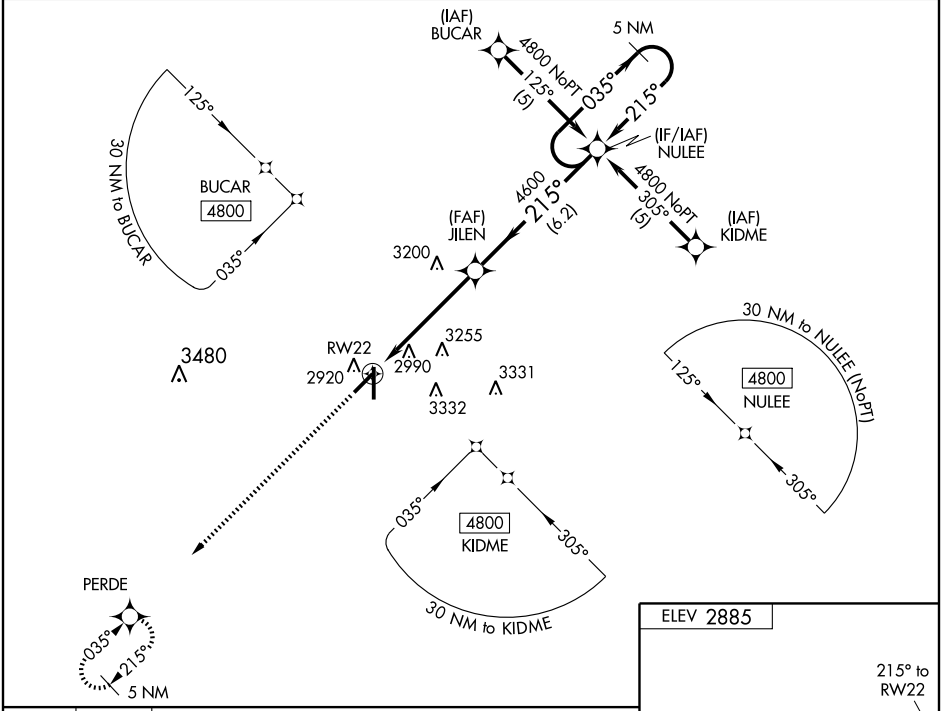

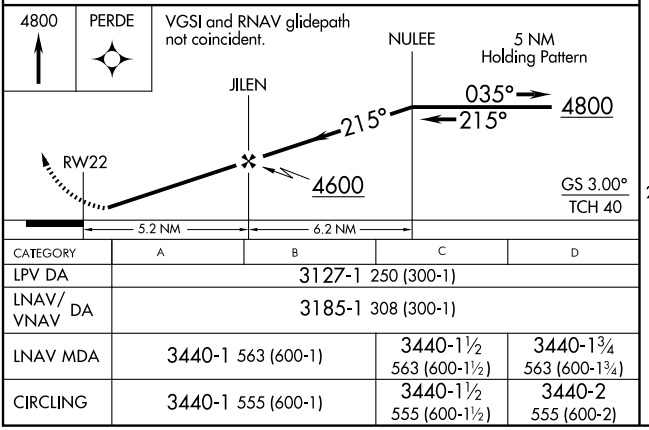

CATEGORY	A	B	C	D
LPV DA	3127-1 250 (300-1)			
LNAV/VNAV DA	3185-1 308 (300-1)			
LNAV MDA	3440-1 563 (600-1)		3440-1½ 563 (600-1½)	3440-1¾ 563 (600-1¾)
CIRCLING	3440-1 555 (600-1)		3440-1½ 555 (600-1½)	3440-2 555 (600-2)

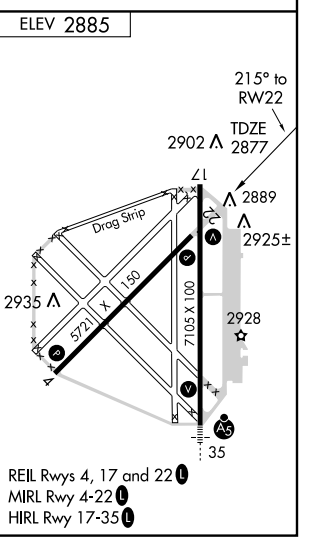

NC-2, 22 OCT 2009 to 19 NOV 2009
NC-2, 22 OCT 2009 to 19 NOV 2009