WAAS CH 72905 W04A	APP CRS 035°	Rwy Idg 5721	TDZE 2885	Apt Elev 2885

RNAV (GPS) RWY 4

LIBERAL MID-AMERICA RGNL (LBL)

▼ If local altimeter setting not received, use Guymon Muni altimeter setting and increase all DAs 112 feet and all MDAs 120 feet. VDP and BARO-VNAV NA when using ▲ Guymon Muni altimeter setting. For uncompensated BARO-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Circling NA east of Rwy 17-35. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 4800 direct NULEE and hold.

AWOS-3	KANSAS CITY CENTER	UNICOM
118.375	134.0 298.0	122.8 (CTAF) L

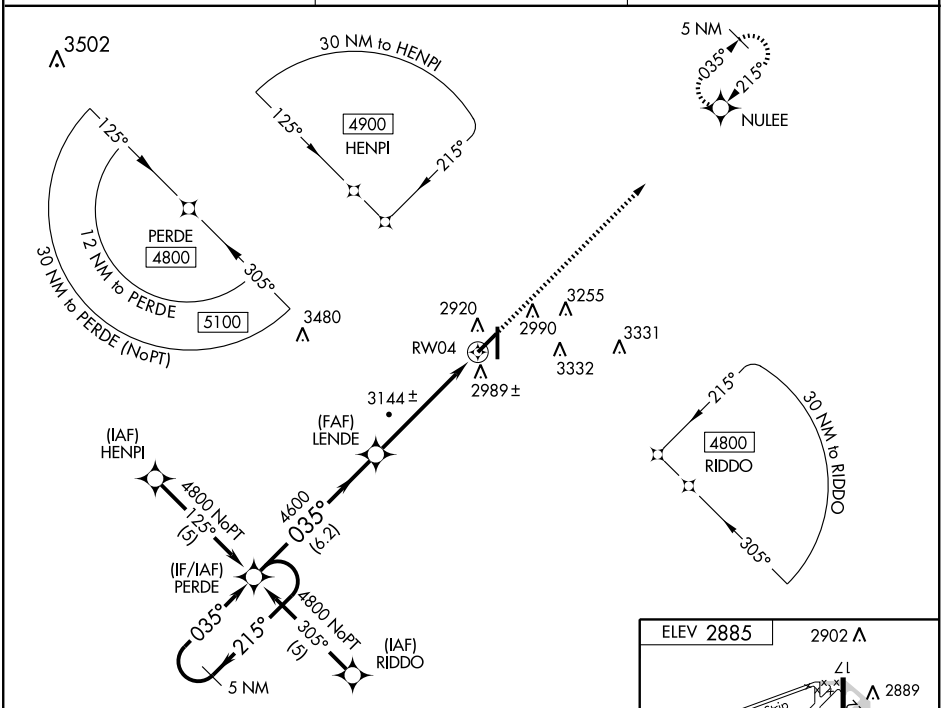

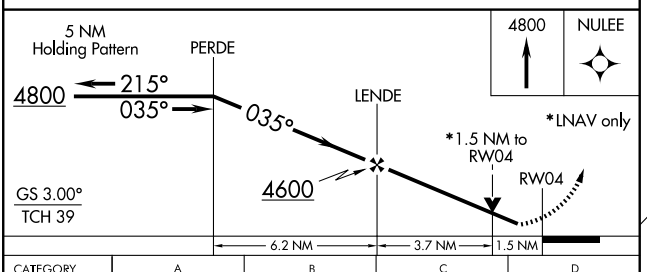

CATEGORY	A	B	C	D
LPV DA	3135-1 250 (300-1)			
LNAV/VNAV DA	3300-1½ 415 (500-1½)			
LNAV MDA	3400-1 515 (600-1)		3400-1½ 515 (600-1½)	3400-1¾ 515 (600-1¾)
CIRCLING	3400-1 515 (600-1)		3400-1½ 515 (600-1½)	3440-2 555 (600-2)

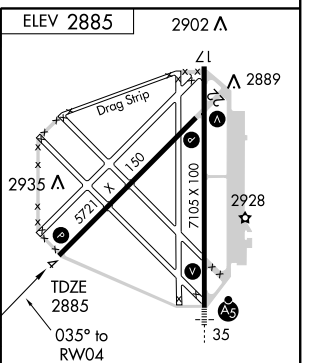

REIL Rwys 4, 17 and 22 L
MIRL Rwy 4-22 L
HIRL Rwy 17-35 L

NC-2, 22 OCT 2009 to 19 NOV 2009
NC-2, 22 OCT 2009 to 19 NOV 2009