WAAS	APP CRS	Rwy ldg	6800
CH 58205	036°	TDZE	906
W04A		Apt Elev	938

RNAV (GPS) RWY 4

LYNCHBURG RGNL/PRESTON GLENN FIELD (LYH)

For inoperative MALSR, increase LNAV Cat A and B visibility to RVR 5000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibilty reduction by helicopters NA.

MALSR

MISSED APPROACH: Climb to 3500 direct JIXOX and via 075° track to SWARM and hold.

ATIS	ROANOKE APP CON	LYNCHBURG TOWER ★	GND CON	UNICOM
119.8	135.0 254.32	127.65 (CTAF) L 257.8	121.9	122.95

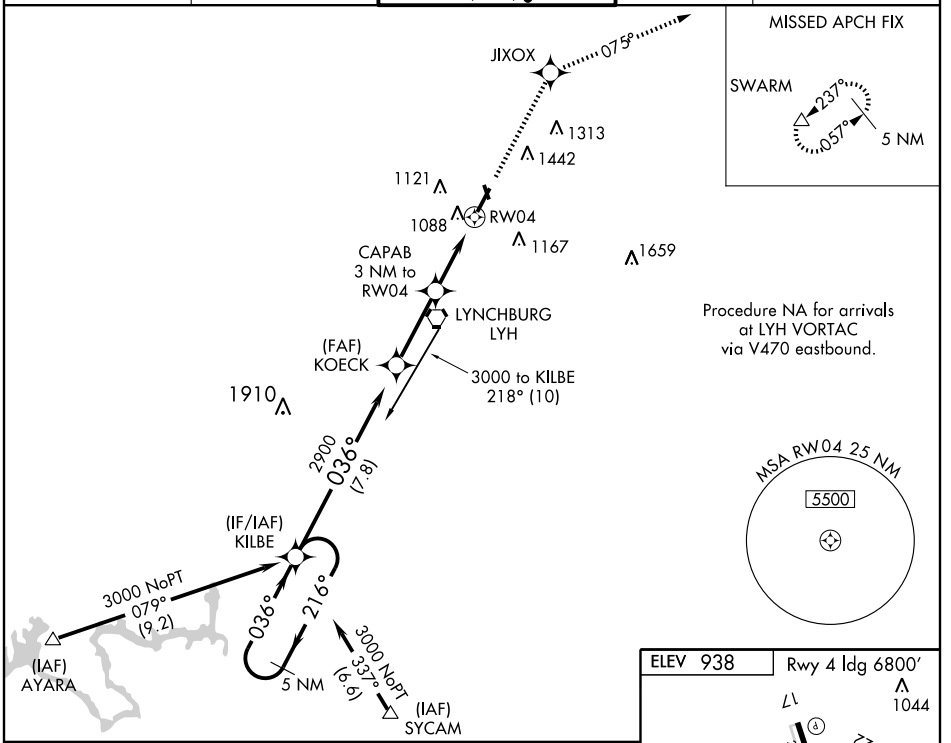

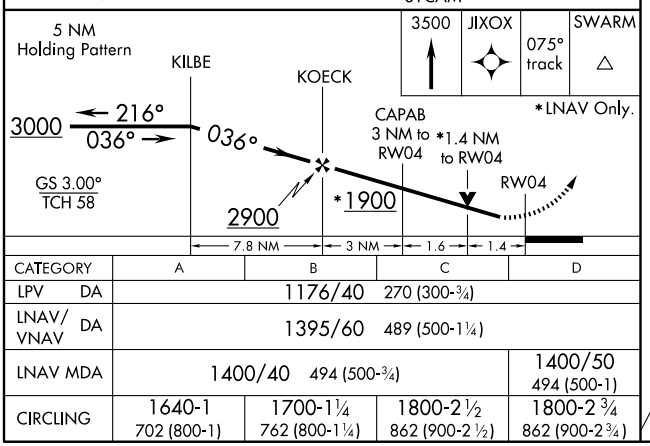

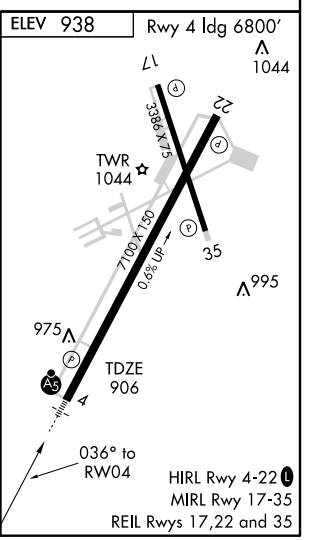

CATEGORY	A	B	C	D
LPV DA	1176/40 270 (300-¾)			
LNAV/VNAV DA	1395/60 489 (500-1¼)			
LNAV MDA	1400/40 494 (500-¾)			1400/50 494 (500-1)
CIRCLING	1640-1 702 (800-1)	1700-1¼ 762 (800-1¼)	1800-2½ 862 (900-2½)	1800-2¾ 862 (900-2¾)

NE-3, 22 OCT 2009 to 19 NOV 2009