LOC I-CDR	APP CRS	Rwy Idg	5212
110.9	024°	TDZE	3292
		Apt Elev	3296

ILS RWY 2
CHADRON MUNI (CDR)

⚠ Obtain local altimeter setting on CTAF; when not received, except for operators with approved weather reporting service, use Scottsbluff altimeter setting.

MALSR

MISSED APPROACH: Climb to 6200 then right turn direct DAWES LOM and hold.

ASOS	DENVER CENTER	UNICOM
118.05	127.95 338.2	122.8 (CTAF) L

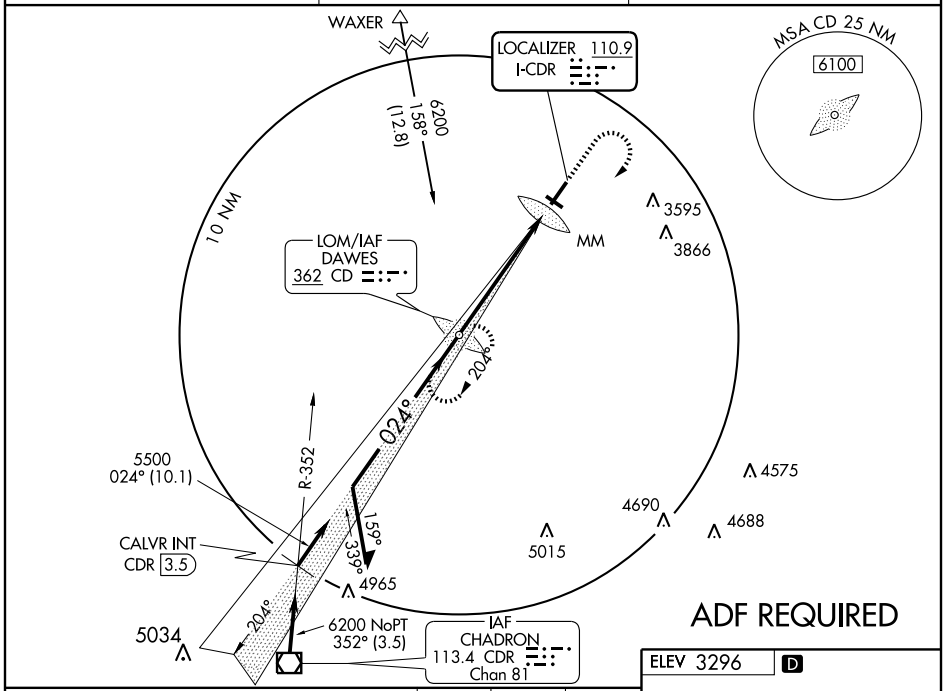

ADF REQUIRED

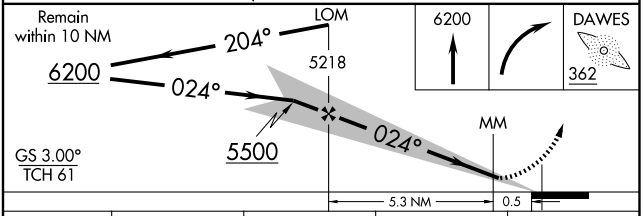

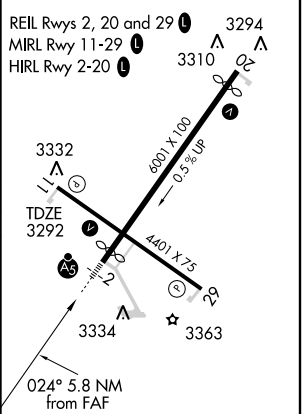

CATEGORY	A	B	C	D
S-ILS 2	3492-½ 200 (200-½)			
S-LOC 2	3880-½ 588 (600-½)		3880-1 588 (600-1)	3880-1¼ 588 (600-1¼)
CIRCLING	3920-1 624 (700-1)		3960-1¾ 664 (700-1¾)	3960-2 664 (700-2)
SCOTTSBLUFF ALTIMETER SETTING MINIMUMS				
S-ILS 2	3729-½ 437 (500-½)			
S-LOC 2	4120-½ 828 (900-½)	4120-¾ 828 (900-¾)	4120-2 828 (900-2)	4120-2¼ 828 (900-2¼)
CIRCLING	4160-1 864 (900-1)	4160-1¼ 864 (900-1¼)	4200-2¾ 904 (1000-2¾)	4200-3 904 (1000-3)

FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

NC-2, 22 OCT 2009 to 19 NOV 2009
NC-2, 22 OCT 2009 to 19 NOV 2009