LOC/DME I-BSM	APP CRS	Rwy Idg	12248
110.95	353°	TDZE	496
Chan 46 (Y)		Apt Elev	542

ILS or LOC RWY 35L

AUSTIN-BERGSTROM INTL (AUS)

▼ Simultaneous approach authorized with Rwy 35R. For inoperative MALSR, increase S-ILS 35L Cat E visibility to RVR 4000, and
▲ S-LOC 35L Cat E visibility to 1¾ mile. ** RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR (A5)

MISSED APPROACH: Climb to 1000 then climbing left turn to 3500 via CWK VORTAC R-222 to GARDS Int/CWK 29.2 DME and hold.

ATIS	AUSTIN APP CON	AUSTIN TOWER	GND CON	CLNC DEL	UNICOM
124.4	127.225 317.65 (355°-175°) 119.0 370.85 (176°-354°)	121.0 281.5	121.9 348.6	125.5 263.0	122.95

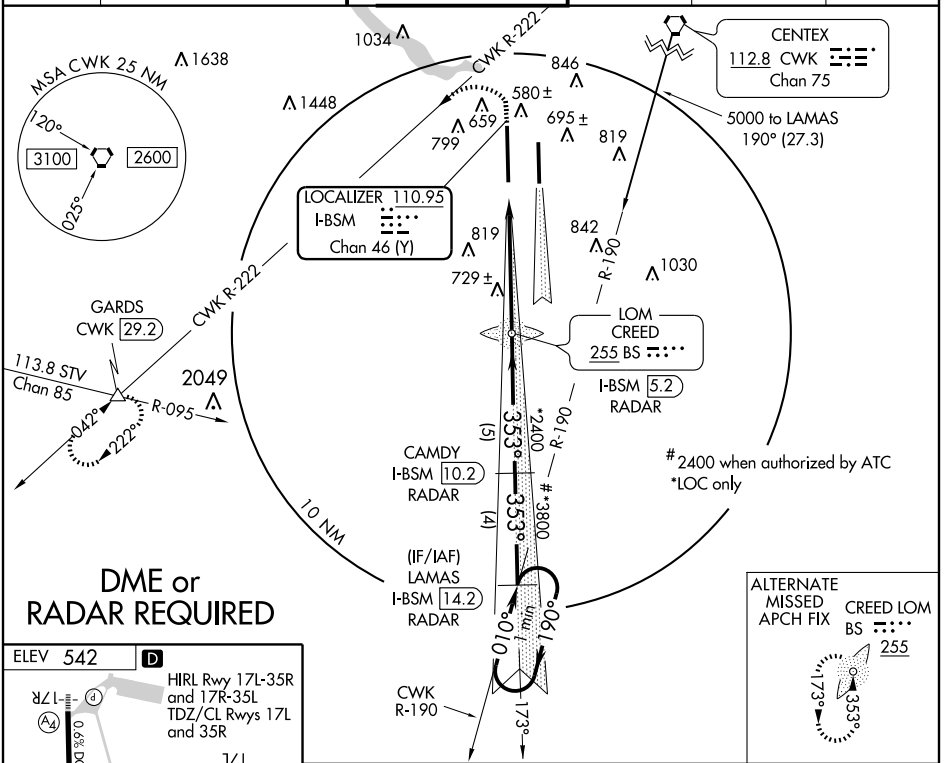

DME or RADAR REQUIRED

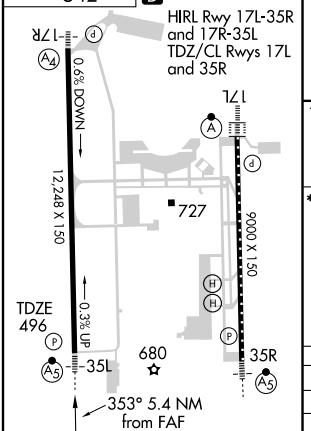

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

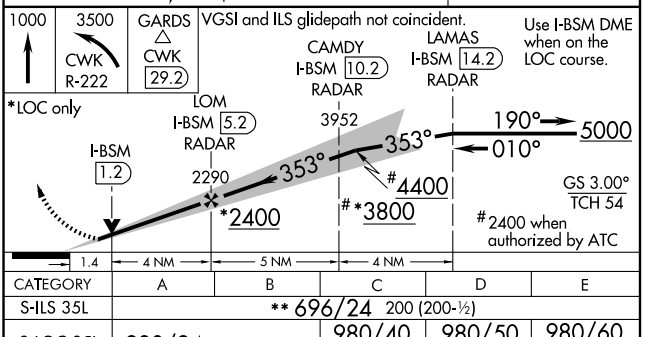

CATEGORY	A	B	C	D	E
S-ILS 35L	** 696/24 200 (200-½)				
S-LOC 35L	980/24 484 (500-½)		980/40 484 (500-¾)	980/50 484 (500-1)	980/60 484 (500-1¼)
CIRCLING	1040-1 498 (500-1)		1040-1½ 498 (500-1½)	1160-2 618 (700-2)	1260-2½ 718 (800-2½)

SC-3, 22 OCT 2009 to 19 NOV 2009
SC-3, 22 OCT 2009 to 19 NOV 2009