

RNAV (GPS) Y RWY 28R


PITTSBURGH INTL (PIT)

WAAS CH 40027 W28D	APP CRS 280°	Rwy Idg TDZE Apt Elev	10102 1174 1203
---------------------------------	------------------------	-----------------------------	--------------------------------------------



⚠ For inoperative MALSR, increase LPV all Cats visibility to RVR 5000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.

MALSR  MISSED APPROACH: Climb to 4000 direct KANVE and right turn via 031° track to EWC VORTAC and hold.

ATIS ARR 127.25 DEP 135.9	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER Rwys 10L-28R 128.3 291.7 Rwys 10C-28C, 14-32 135.025 270.325 Rwy 10R-28L 119.1 270.325	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6	CLNC DEL 126.75 353.7
-----------------------------------------------	-------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------	---------------------------------

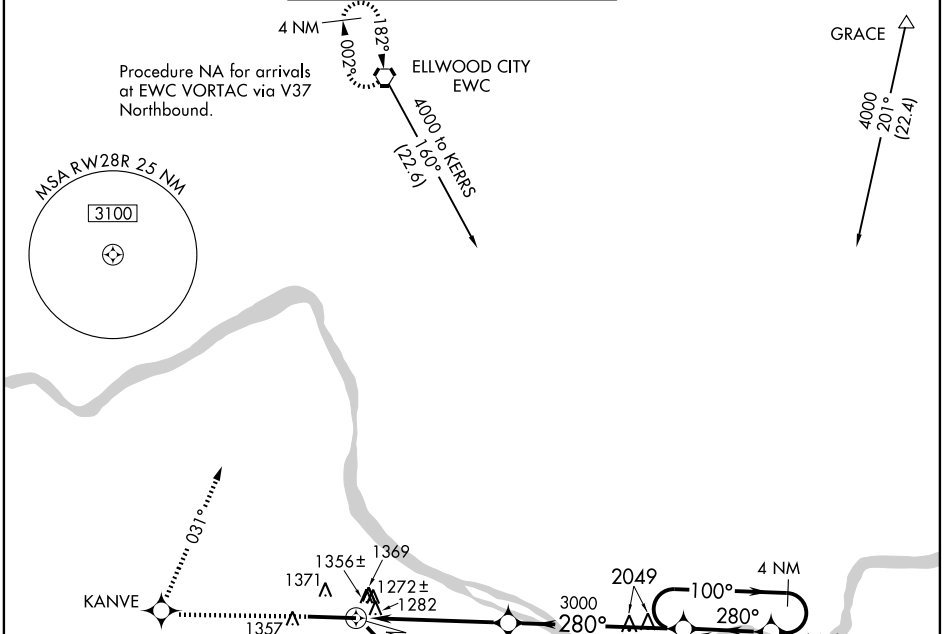

ELEV 1203	D
-----------	----------

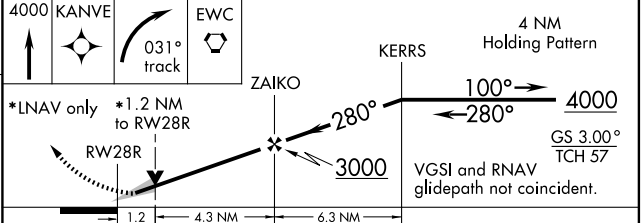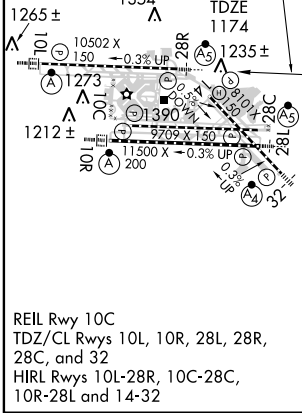

CATEGORY	A	B	C	D
LPV DA		1453/24	279 (300-1/2)	
LNAV/VNAV DA		1710/60	536 (600-1/4)	
LNAV MDA	1640/24	466 (500-1/2)	1640/40 466 (500-3/4)	1640/50 466 (500-1)
CIRCLING	1700-1	497 (500-1)	1700-1 1/2 497 (500-1 1/2)	1760-2 557 (600-2)

NE-4, 22 OCT 2009 to 19 NOV 2009

NE-4, 22 OCT 2009 to 19 NOV 2009