LOC I-CWT	APP CRS	Rwy Idg	8720
108.7	353°	TDZE	10
		Apt Elev	11

ILS or LOC/DME RWY 35R

ST. PETERSBURG-CLEARWATER INTL(PIE)

T A DME from PIE VORTAC. Simultaneous reception of I-CWT and PIE DME Required. When local altimeter setting not received, use Tampa Intl altimeter setting and increase DA to 233 feet, increase all MDAs 40 feet, and S-LOC 35 Cat. C and E visibility ¼ mile.

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 via PIE VORTAC R-270 to LAFAL Int/PIE 8 DME and hold.

ATIS	TAMPA APP CON	ST. PETERSBURG TOWER★	GND CON	CLNC DEL	UNICOM
134.5	125.3 316.05	118.3 (CTAF) L 257.8	121.9 348.6	120.6 350.2	122.95

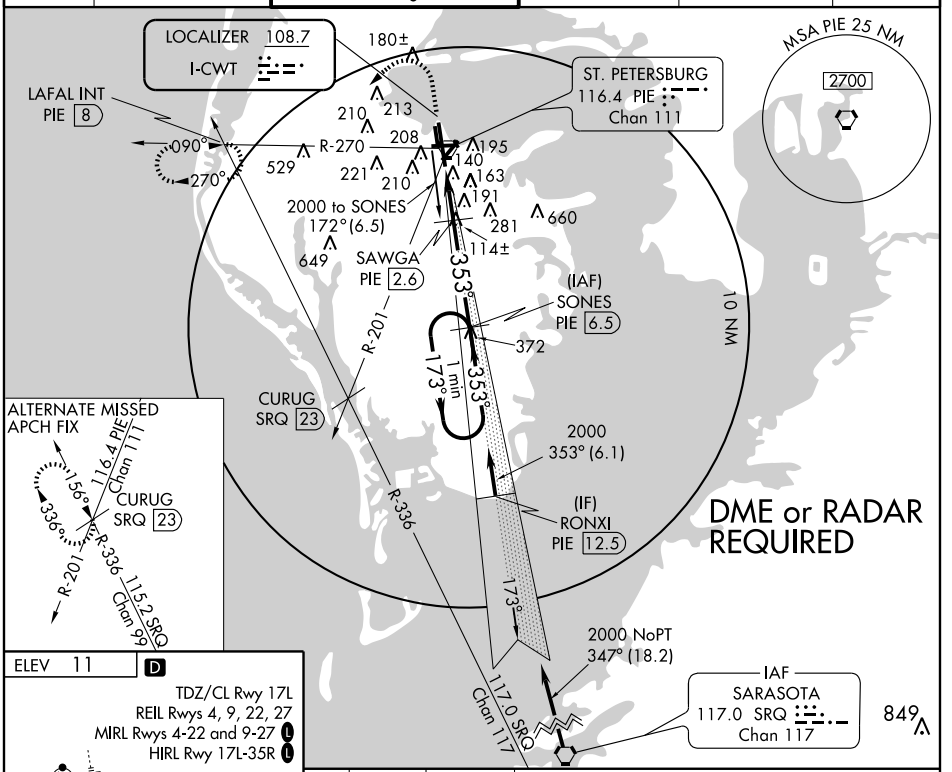

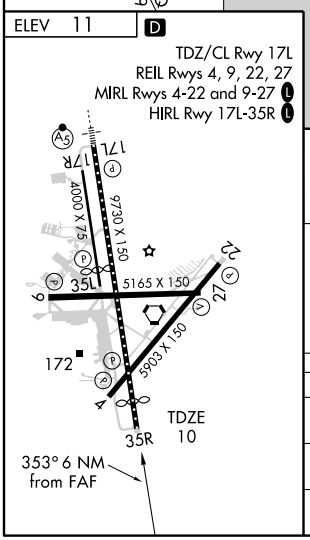

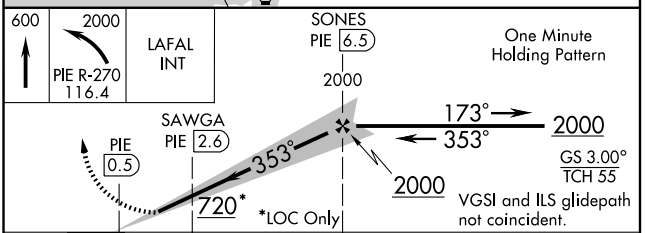

CATEGORY	A	B	C	D	E
S-ILS 35R	210-¾ 200 (200-¾)				
S-LOC 35R	380-1 370 (400-1)			380-1¼ 370 (400-1¼)	
CIRCLING	520-1 509 (600-1)		520-1½ 509 (600-1½)	580-2 569 (600-2)	960-3 949 (1000-3)

SE-3, 22 OCT 2009 to 19 NOV 2009

SE-3, 22 OCT 2009 to 19 NOV 2009