WAAS	APP CRS	Rwy Idg	9180
Chan 50126	173°	TDZE	7
W17A		Apt Elev	10

RNAV (GPS) RWY 17L

ST. PETERSBURG-CLEARWATER INTL (PIE)

When local altimeter setting not received, use Tampa Intl altimeter setting: increase LPV DA to 281 feet; increase LNAV/VNAV DA to 300 feet; increase all MDAs 40 feet. Baro-VNAV NA below -15°C (5°F). DME/DME RNP-0.3 NA. For inoperative MALSR increase LPV visibility to RVR 4000 all Cats, LNAV/VNAV Cat D to RVR 5000.

MALSR

MISSED APPROACH: Climb to 2600 direct RONXI WP and hold.

ATIS	TAMPA APP CON	ST. PETERSBURG TOWER★	GND CON	CLNC DEL	UNICOM
134.5	125.3 316.05	118.3 (CTAF) L 257.8	121.9 348.6	120.6 350.2	122.95

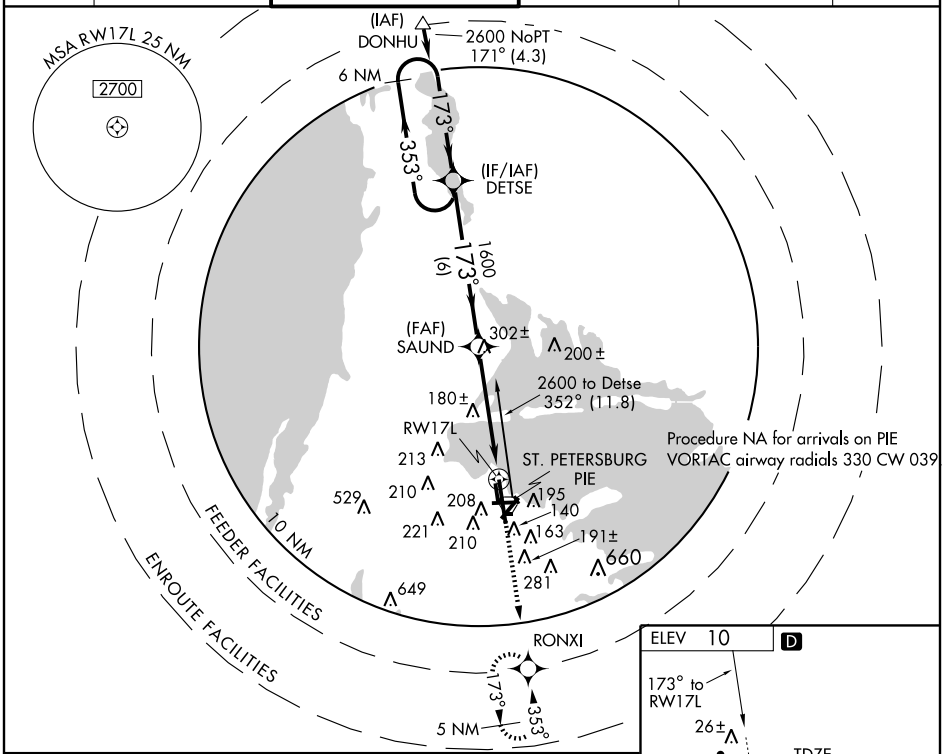

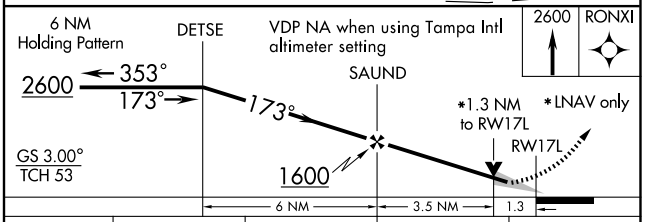

CATEGORY	A	B	C	D
LPV DA	257/24 250 (300-½)			
LNAV/VNAV DA	276/24 269 (300-½)			276/40 269 (500-¾)
LNAV MDA	480/24 473 (500-½)		480/40 473 (500-¾)	480/50 473 (500-1)
CIRCLING	520-1 510 (600-1)		520-1½ 510 (600-1½)	560-2 550 (600-2)

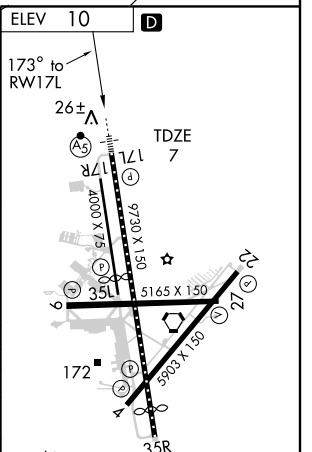

SE-3, 22 OCT 2009 to 19 NOV 2009
SE-3, 22 OCT 2009 to 19 NOV 2009