


LOC/DME I-ULJ 111.15	APP CRS 293°	Rwy Idg 7001
Chan 48(Y)		TDZE 128
		Apt Elev 133

ILS or LOC RWY 29

BEDFORD/LAURENCE G. HANSCOM FIELD (BED)



ADF required. VDP NA when using Boston altimeter setting. ▲ If local altimeter setting not received, use Boston altimeter setting and increase all DAs to 377 feet and all MDAs 60 feet.	MALSR 	MISSED APPROACH: Climb to 2000 direct BE LOM and hold.
---	------------------	---

ATIS 124.6	BOSTON APP CON 124.4 279.6	HANSCOM TOWER* 118.5 (CTAF) 236.6	GND CON 121.7	CLNC DEL 121.85	UNICOM 122.95
-----------------------------	---	--	--------------------------------	----------------------------------	--------------------------------

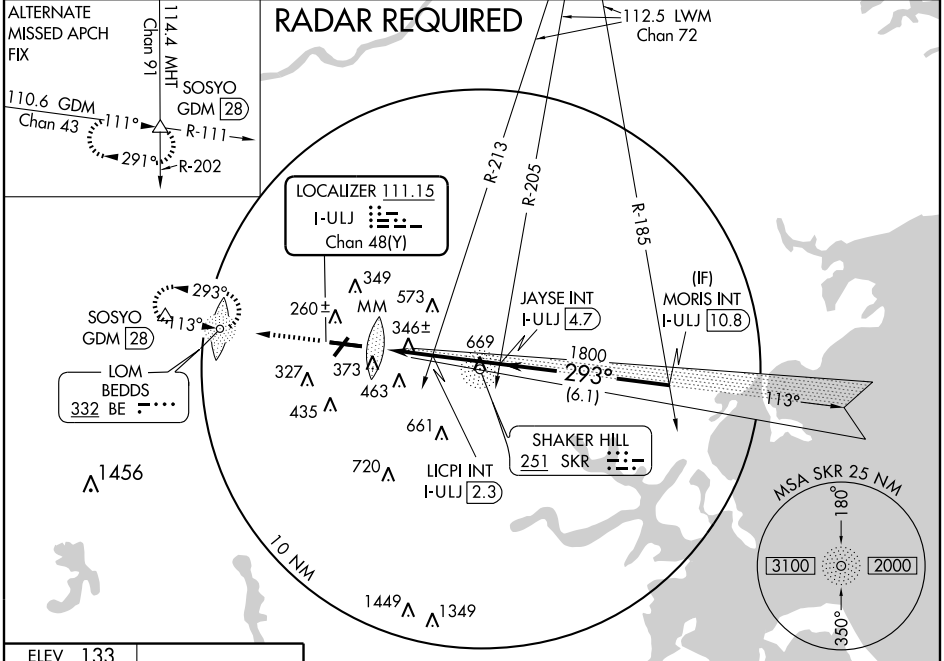

NE-1, 22 OCT 2009 to 19 NOV 2009

NE-1, 22 OCT 2009 to 19 NOV 2009

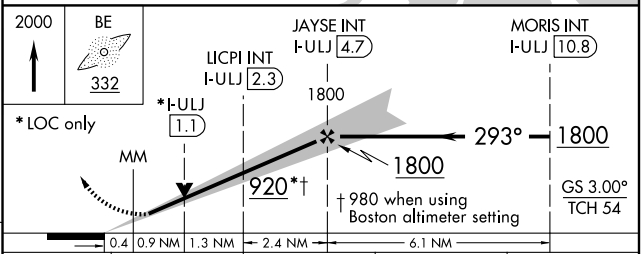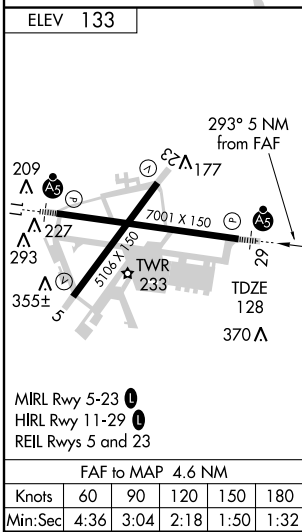

CATEGORY	A	B	C	D
S-ILS 29	328-½ 200 (200-½)			
S-LOC 29	920-½ 792 (800-½)	920-¾ 792 (800-¾)	920-1¾ 792 (800-1¾)	920-2 792 (800-2)
CIRCLING	920-1 787 (800-1)	920-1¼ 787 (800-1¼)	920-2¼ 787 (800-2¼)	920-2½ 787 (800-2½)
LICPI FIX MINIMUMS				
S-LOC 29	600-½ 472 (500-½)	600-¾ 472 (500-¾)	600-1 472 (500-1)	600-1 472 (500-1)
CIRCLING	680-1 547 (600-1)	700-1½ 567 (700-1½)		780-2 647 (700-2)