LOC/DME I-VXO	APP CRS	Rwy Idg	6350
110.55	133°	TDZE	344
Chan 42 (Y)		Apt Elev	344

ILS or LOC RWY 13

READING RGNL / CARL A SPAATZ FIELD (RDG)

Visibility reduction by helicopters NA.
VDP NA when using Harrisburg Intl altimeter setting.
When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase S-ILS 13 Cats A and B DA to 637 feet and visibility ¼ mile, Cats C and D DA to 687 feet and visibility ½ mile. Increase all MDA 100 feet and S-LOC 13 Cats C and D visibility ¼ mile, Circling Cat C visibility ½ mile, and Cats B and D visibility ¼ mile.

MISSED APPROACH: Climb to 900 then climbing right turn to 3200 via heading 280° and LRP VORTAC R-020 to OUTLT INT/I-VXO 12.7 DME and hold.

ATIS	READING APP CON ★	READING TOWER ★	GND CON	UNICOM
127.1	125.15 257.9	119.9 (CTAF) L 288.3	121.9	122.95

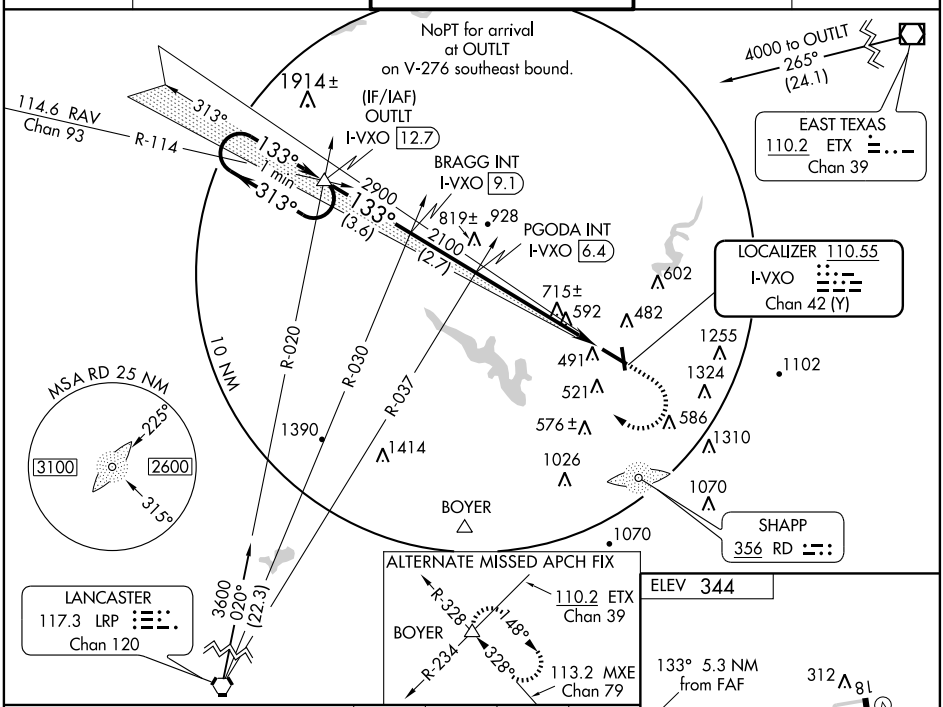

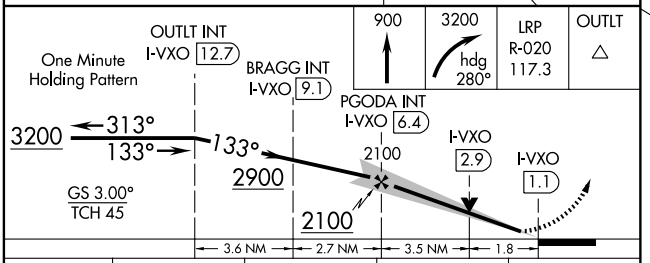

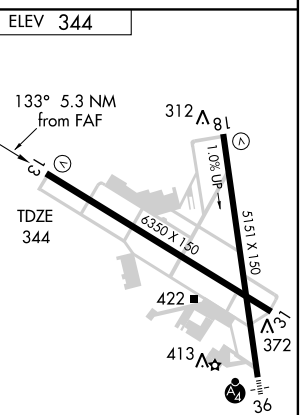

CATEGORY	A	B	C	D
S-ILS 13	544-¾ 200 (200-¾)		594-¾ 250 (300-¾)	
S-LOC 13	980-1 636 (700-1)		980-1¾ 636 (700-1¾)	980-2 636 (700-2)
CIRCLING	1000-1 656 (700-1)		1000-1¾ 656 (700-1¾)	1120-2½ 776 (800-2½)

REIL Rwy 31 L
HIRL Rwys 13-31 and 18-36 L

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

NE-4, 22 OCT 2009 to 19 NOV 2009
NE-4, 22 OCT 2009 to 19 NOV 2009