LOM RD	APP CRS	Rwy Idg	5151
356	005°	TDZE	343
		Apt Elev	344

NDB RWY 36

READING RGNL / CARL A SPAATZ FIELD (RDG)

Straight-in minimums NA at night. Inoperative table does not apply. Visibility reduction by helicopters NA. When local altimeter setting not received, use Harrisburg Intl altimeter setting and increase all MDA 100 feet and S-36 Cats C and D visibility ¼ mile, Circling Cat C visibility ½ mile and Cat B and D visibility ¼ mile.

MALSF

MISSED APPROACH: Climb to 3000 via heading 005° and RAV VORTAC R-114 to DUMMR INT/RAV 22.9 DME and hold, continue climb-in-hold to 3000.

ATIS	READING APP CON ★	READING TOWER ★	GND CON	UNICOM
127.1	125.15 257.9	119.9 (CTAF) L 288.3	121.9	122.95

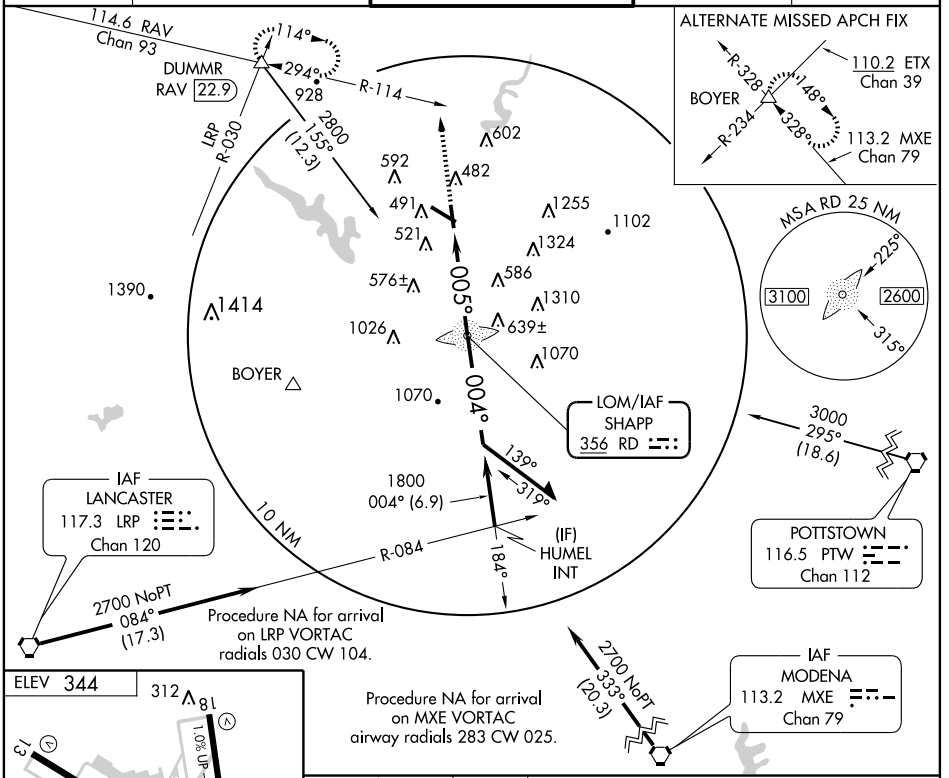

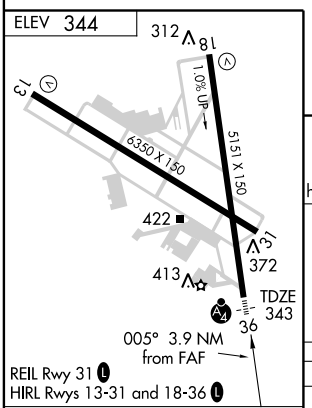

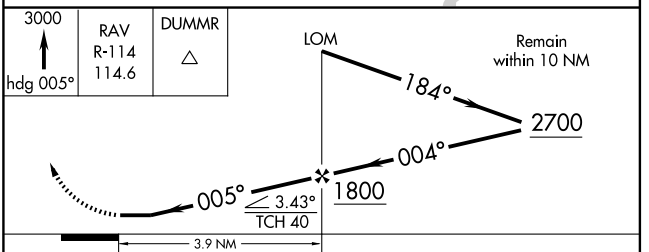

FAF to MAP 3.9 NM					
Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18

CATEGORY	A	B	C	D
S-36	900-1 557 (600-1)		900-1½ 557 (600-1½)	900-1¾ 557 (600-1¾)
CIRCLING	1000-1 656 (700-1)		1000-1¾ 656 (700-1¾)	1120-2½ 776 (800-2½)

NE-4, 22 OCT 2009 to 19 NOV 2009

NE-4, 22 OCT 2009 to 19 NOV 2009